

BEGIN SIDE PANEL

Net Contents  
1 Gallon  
U.S. Measure  
3.785 Liters

NEW NAUTICAL  
COATINGS, INC.  
2181 34<sup>th</sup> Way  
Largo, FL 33771

END SIDE PANEL

BEGIN FRONT PANEL

# Sea Hawk


Yacht Finishes

(Picture of Sea Hawk)

Premium Quality

# MONTEREY

Water Borne Antifouling Coating

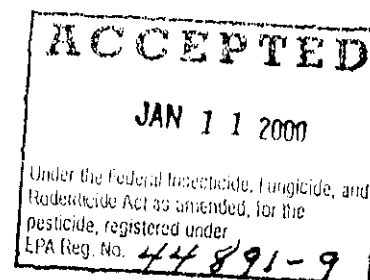

EPA

12 7 99

44891-9

1/11/2000

Page 134

ACTIVE INGREDIENT: Cuprous Oxide ... 54.67%  
INERT INGREDIENTS: ..... 45.33%  
TOTAL 100.00%

Copper expressed as metallic 51.76%

KEEP OUT OF REACH OF CHILDREN

## WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

**LIMITED WARRANTY:** The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

END FRONT PANEL

BEGIN BACK PANEL

## DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

## GENERAL DESCRIPTION

Hard ablative, multi-seasonal, water-based antifoulant. Provides protection against algae, barnacles, annelids, tunicates, bryzoa, hydroids, zebra mussels and other fouling organisms. Monterey is abrasion resistant for scrubbing, trailering and dry storage. Reduces paint buildup. This product may only be used to treat the surfaces of hulls on boats and vessels. This product is intended for both salt and fresh water use.

Monterey applies easily and dries quickly. It may be used over old antifouling finishes in good condition.

Monterey is an antifouling paint in a high-technology vehicle that withstands frequent trailering, beaching and launching.

Monterey should not be used on aluminum.

**SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION**

## PRODUCT INFORMATION

Finish/Sheen: Semi-Gloss  
Converter: One Pack  
Copper Content: 58%  
Volume Solids: 44% ± 2%  
Mix Ratio: One Pack  
Shipping Weight: 21-22 Lbs./Gal.  
Flash Point: N/A  
Film Thickness: 5 mils wet equals 2.2 dry per coat  
Recommended Coats: 2 on entire hull and 3 at waterline  
Theoretical Coverage: 320 Sq. Ft./Gal. @ recommended film thickness

## APPLICATION DETAILS

Method: Brush, roller or spray

**ACCEPTED**

JAN 11 2000

Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 44891-9

Thinner: Water  
Cleaner: Water

#### Ove coating Interval

#### Drying Time (Hrs)

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	2 Hrs	1 Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

Consult with your Sea Hawk representative for the system best suited for surfaces to be protected.

#### REGULATORY DATA

VOC: 113 Grams/Liter

**LIMITATIONS:** Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 50°F (10°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100°F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

**SURFACE PREPARATION:** Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC - SPI)

**New Construction:** As yard procedures may vary, consult with your Sea Hawk Representative.

**APPLICATION:** Apply by brush, roller or spray. Apply 6 mils wet, which will yield 2.6 mils dry per coat.

#### EQUIPMENT

Brush: China Bristle

Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; 0.21-0.26" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh tip filter.

**THINNING:** If thinning is necessary, thin up to a maximum of 10% with clean potable water.

**CLEANUP:** Clean all equipment immediately after use with water. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

**SAFETY:** Read and observe all precautionary statements on this label.

#### PRECAUTIONARY STATEMENTS

##### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**WARNING.** Cause substantial but temporary eye injury. May be fatal if swallowed or inhaled. Harmful if absorbed through skin. Do not get in eyes or clothing. Do not breathe vapor or spray mist, or dust or chips from sanding. Avoid contact with skin, eyes or clothing. Wear protective eyewear (goggles, face shield, or safety glasses). While spraying paint or sanding boat surface, wear a mask or pesticide respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health, unless air monitoring demonstrates vapor/mist levels are below applicable limits. Wear protective clothing (long-sleeved cotton shirt, long pants and hat) and waterproof gloves. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse.

##### ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

#### STATEMENT OF PRACTICAL TREATMENT

**IF IN EYES:** Hold eyelids open and flush with a steady, gentle stream of water for 15 minutes. Get medical attention.

**IF SWALLOWED:** Call a physician or Poison Control Center. Do not induce vomiting. Do not give anything by mouth to an unconscious person.

**IF INHALED:** Remove victim to fresh air. If victim is not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention.

#### STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

EPA

12 7 99

ACCEPTED

JAN 11 2000

Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 44891-9

**STORAGE:** Keep container closed when not in use. Keep container tight and upright to prevent leakage. Do not store near heat or open flame. Store below 100°F/38°C. Store in well-ventilated area.

**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**IN CASE OF A SPILL OR LEAK:** Ventilate area. Absorb with an inert material and dispose of in accordance with applicable local regulations.

**IN CASE OF FIRE:** Use CO<sub>2</sub>, dry chemical, foam or water spray/fog. Cool closed containers with water.

EPA Registration Number 44891-9

EPA Establishment Number 44891-FL-1

END BACK PANEL

