

BEGIN SIDE PANEL

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL
COATINGS, INC.
2181 34th Way
Largo, FL 33771

END SIDE PANEL

BEGIN FRONT PANEL

Sea Hawk

Yacht Finishes


(Picture of Sea Hawk)

Premium Quality

TROPIKOTE

Anti-Fouling Bottom Paint

ACCEPTED
JAN 11 2000
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 44891-10



44891-10
1/11/2000

Page 184

ACTIVE INGREDIENT: Cuprous Oxide ... 75.80%
INERT INGREDIENTS: 24.20%
TOTAL 100.00%

Copper expressed as metallic 67.3%
Contains petroleum distillates.

KEEP OUT OF REACH OF CHILDREN
WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

END FRONT PANEL.

BEGIN BACK PANEL

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Hard epoxy-based antifoulant with over 75% copper in every color. Designed to control barnacles, algae and other marine foulings in any salt or fresh water, subtropical to tropical, condition. Ideal for power or sail. This product is only for use on the surfaces of hulls on boats and vessels.

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION

Finish/Sheen: Semi-Gloss
Converter: One Pack
Copper Content: 75.8%
Volume Solids: 60% ± 2%
Mix Ratio: One Pack
Shipping Weight: 24-25 Lbs./Gal.
Flash Point: 80°F
Film Thickness: 5 mils wet equals 3 dry per coat
Recommended Coats: 2 on entire hull and 3 at waterline
Theoretical Coverage: 320 Sq. Ft./Gal. @ recommended film thickness

APPLICATION DETAILS

Method: Brush, roller or spray
Thinner: 2033-2035
Cleaner: Sea Hawk Xylene 7130

ACCEPTED
JAN 11 2000
Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 44891-10

h b c

Overcoating Interval

Drying Time (Hrs)

Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	2 Hrs	1Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

REGULATORY DATA

VOC: 288 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 50°F (10°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100°F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC -SPI)

New Construction: As yard procedures may vary, consult with your Sea Hawk Representative.

APPLICATION: Apply by brush, roller or spray. Apply 5 mils wet, which will yield 3 mils dry per coat.

EQUIPMENT

Brush: China Bristle

Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; 0.21-0.26" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh tip filter.

THINNING: We do not recommend thinning. However, if thinning is necessary, thin up to a maximum of 10%, with Sea Hawk 2033-2035 only.

CLEANUP: Clean all equipment immediately after-use with xylene. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

SAFETY: Read and observe all precautionary statements on this label.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. Cause moderate eye irritation. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Avoid contact with skin, eyes or clothing. Do not breathe vapors, spray mist, or dust or chips from sanding. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near heat or open flame.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. If person is unconscious, do not give anything by mouth and do not induce vomiting.

IF INHALED: Remove victim to fresh air. If victim is not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

IF IN EYES: Flush with plenty of water. Call a physician if irritation persists.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near heat or open flame. Store below 100°F/38°C. Store in well-ventilated area.

ACCEPTED

JAN 11 2000


Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 44891-10

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinse is a violation of Federal Law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.
CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

EPA Registration Number 44891-10

EPA Establishment Number 44891-FL-1

END BACK PANEL

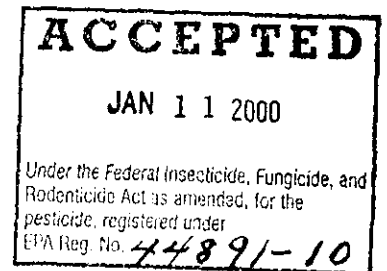

424