


[FRONT PANEL]

Sea Hawk

Yacht Finishes

(Picture of Sea Hawk here)

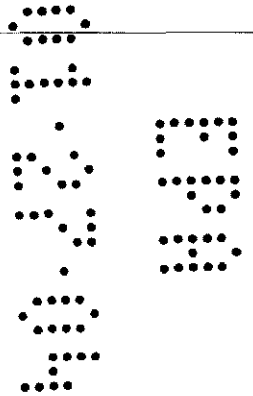

ACCEPTED

MAR 18 2004

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 44891-10

PREMIUM QUALITY

TROPIKOTE

Anti-Fouling Bottom Paint

[Optional proposed text appears in brackets - the final label may include some or all of the optional text]

[Paint Color and Number]

| | |
|------------------------------------|---------|
| ACTIVE INGREDIENT: | |
| Cuprous Oxide | 75.80% |
| OTHER INGREDIENTS*: | 24.20% |
| TOTAL: | 100.00% |
| Copper expressed as metallic 67.3% | |
| *Contains Petroleum Distillates | |

KEEP OUT OF REACH OF CHILDREN

WARNING


SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied.

[FRONT SIDE PANEL]

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL COATINGS, INC.
14805 49th Street North
Clearwater, FL 33762
www.seahawkpaints.com

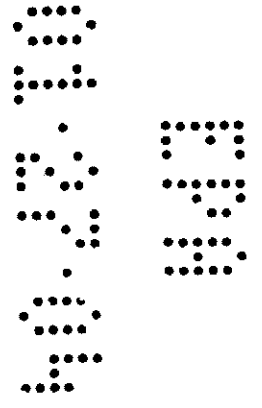

ACCEPTED

MAR 18 2004

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 44891-10

3/6

[BACK PANEL]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Hard epoxy-based antifoulant with over 75% copper in every color. Designed to control barnacles, algae and other marine foulings in any salt or fresh water, subtropic to tropical, condition. Ideal for power and sail. This product is only for use on the surfaces of hulls on boats and vessels.

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION

| | |
|-----------------------|---|
| Finish/Sheen: | Semi-Gloss |
| Converter: | One Pack |
| Copper Content: | 75.8% |
| Volume Solids: | 6% ± 2% |
| Mix Ratio: | One Pack |
| Shipping Weight: | 24-25 Lbs./Gal. |
| [Flash Point: | 100° F |
| Film Thickness: | 5 mils wet equals 3 dry per coat |
| Recommended Coats: | 2 on entire hull and 3 at waterline |
| Theoretical Coverage: | 320 Sq. Ft./Gal. @ recommended film thickness |

APPLICATION DETAILS

| | |
|----------|------------------------|
| Method: | Brush, roller or spray |
| Thinner: | 2033-2035 |
| Cleaner: | Sea Hawk Xylene 7130 |


Overcoating Internal

Drying Time (Hrs)

| Substrate Temp. | Touch | Min. | Max. | Launch |
|-----------------|-------|------|------|--------|
| 73° F (23° C) | 2 Hrs | 1 Hr | N/A | 12 Hrs |
| 95° F (35° C) | 1 Hr | 1 Hr | N/A | 12 Hrs |

REGULATORY DATA

VOC:288 Grams/Liter

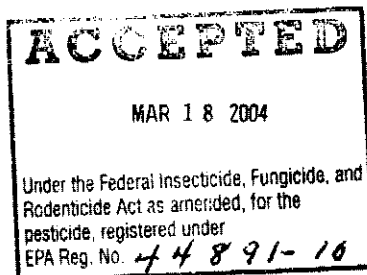

[BACK PANEL CONTINUED]

LIMITATIONS: Apply in good weather when air and surface temperature are above 50° F (10° C). Surface temperature must be at least 50° F (10° C) above dew point. For optimum application properties, bring material to 70-80° F (21-27° C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100° F (4-38° C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating and the proper coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SPI)

New Construction: As yard procedures may vary, consult with your Sea Hawk Representative.

APPLICATION: Apply by brush, roller or spray. Apply 5 mils wet, which will yield 3 mils dry per coat.

EQUIPMENT

Brush: China Bristle


Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; 0.21-0.26" (533-660 microns) orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh tip filter.

THINNING: We do not recommend thinning. However, if thinning is necessary, thin up to a maximum of 10%, with Sea Hawk 2033-2035 only.

CLEANUP: Clean all equipment immediately after use with Sea Hawk Xylene 7130. It is good practice to periodically flush out spray equipment during the course of the day. Frequency depends upon the amount sprayed, temperature, elapsed time including delay, etc.

SAFETY: Read and observe all precautionary statements on this label.

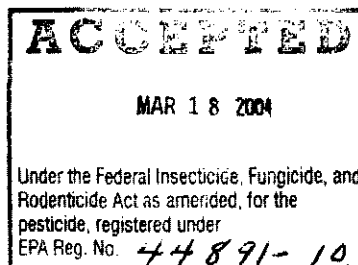

5/6

[BACK PANEL CONTINUED]

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near heat or open flame. Store below 100° F/38°C. Store in well ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS


WARNING. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. Causes moderate eye irritation. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Avoid contact with skin, eyes or clothing. Do not breathe vapors, spray mist, or dust or chips from sanding. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near heat or open flame.

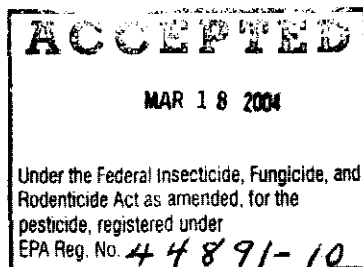


6/6

[BACK PANEL CONTINUED]

| FIRST AID | |
|--|---|
| If swallowed | <ul style="list-style-type: none"> • Immediately call a poison control center or doctor. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give any liquid to the person. • Do not give anything by mouth to an unconscious person. |
| If on skin or clothing | <ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice. |
| If inhaled | <ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice. |
| If in eyes | <ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice. |
| <p>Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-528-0997 for emergency medical treatment information.</p> | |
| <p>NOTE TO PHYSICIAN: Contains petroleum distillate, vomiting may cause aspiration pneumonia.</p> | |

EPA Reg. No. 44891-10

EPA Est. No. 44891-FL-1

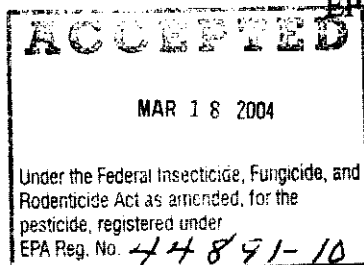

REVISED: 01-21-04

S:\MAIN\NEW NAUTICAL COATINGS, INC.\LABELS\SEA HAWK TROPIKOTE ANTI-FOULING BOTTOM PAINT