

44891-11

2/21/2007

1/5

FEB 21 2007

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



Office of Pesticide Programs

New Nautical Coatings, Inc.
14805 49th Street North
Clearwater, FL 33762

Attention: Mario Garneau

Subject: SeaHawk Sharkskin Antifouling Paint
EPA Registration No. 44891-11
Notification Dated January 11, 2007

This will acknowledge receipt of your notification for the following alternate brand name, submitted under the provisions of FIFRA Section 3(c)(9). Based on a review of the submitted material, the following comments apply.

ADDITIONAL BRAND NAME

"Seahawk Tropikote Pro Antifouling Coating"

The Notification dated January 11, 2007 is in compliance with PR Notice 98-10 and is acceptable. This information has been added to your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely

A handwritten signature in black ink, appearing to read "M. Swindell". The signature is fluid and cursive, written over the printed name.

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)

By Courier Delivery

Thursday, January 11, 2007

Document Processing Desk (NOTIF)
Office of Pesticide Programs (7504P)
U.S. Environmental Protection Agency
One Potomac Yard
2777S Crystal Drive
Room S4900, 4th floor
Arlington, VA 22202

Attn: Linda Arrington
Notification Team

Subject: *Notification of Alternative Brand Name per Notice 98-10
SeaHawk Sharkskin Antifouling Paint
EPA Reg. No. 44891-11*

Dear Ms. Arrington:

1. This submission is being made on behalf of New Nautical Coatings, Inc. Please find enclosed a notification to change the Alternative Brand Name "*Sea Hawk AF Sharkskin Antifouling Paint*" for "Sea Hawk Tropikote Pro Antifouling Coating". As required, two (2) copies of the labeling is attached. This notification is being filed in accordance with PR-Notice 98-10.

Should you have any questions or need additional information please do not hesitate to contact us.

Sincerely,

~~Mario Garneau~~
Chemist

Enclosures

Please read instructions on reverse, before completing form.

Form Approved. OMB No. 2070-0060. Approval expires 2-28-



United States
Environmental Protection Agency
Washington, DC 20460

☐ Registration
☐ Amendment
☒ Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 44891-11	2. EPA Product Manager Linda Arington	3. Proposed Classification ☐ None ☐ Restricted
4. Company/Product (Name) Sea Hawk Sharkskin Antifouling Paint	PM# Notification Team	
5. Name and Address of Applicant (Include ZIP Code) New Nautical Coatings, Inc, 14805 49th Street North, Clearwater, FL, 33762 ☐ Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 2(e)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

☐ Amendment - Explain below.	☐ Final printed labels in response to Agency letter dated _____
☐ Resubmission in response to Agency letter dated _____	☐ "Me Too" Application.
☒ Notification - Explain below.	☐ Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)


Notification of Alternative Brand Name per PR Notice 98-10. This notification is consistent with the provisions of PR Notice 98-10 and EPA regulations at 40 CFR 152.46, and no other changes have been made to the labeling or the confidential statement of formula of this product.

Section - III

1. Material This Product Will Be Packaged In:			
Child-Resistant Packaging ☐ Yes ☐ No	Unit Packaging ☐ Yes ☐ No	Water Soluble Packaging ☐ Yes ☐ Text ☐ No	2. Type of Container ☐ Metal ☐ Plastic ☐ Glass ☐ Paper ☐ Other (Specify) _____
* Certification must be submitted		If "Yes" Unit Packaging wgt. _____ No. per container _____	If "Yes" Package wgt. _____ No. per container _____
3. Location of Net Contents Information ☐ Label ☐ Container		4. Size(s) Retail Container _____	5. Location of Label Directions ☐ On Label ☐ On Labeling accompanying product
6. Manner in Which Label is Affixed to Product ☐ Lithograph ☐ Paper glued ☐ Stenciled		☐ Other _____	

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Mario Garneau	Title Chemist	Telephone No. (Include Area Code) 727-523-8053
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Chemist	
4. Typed Name Mario Garneau	5. Date 1/11/2007	

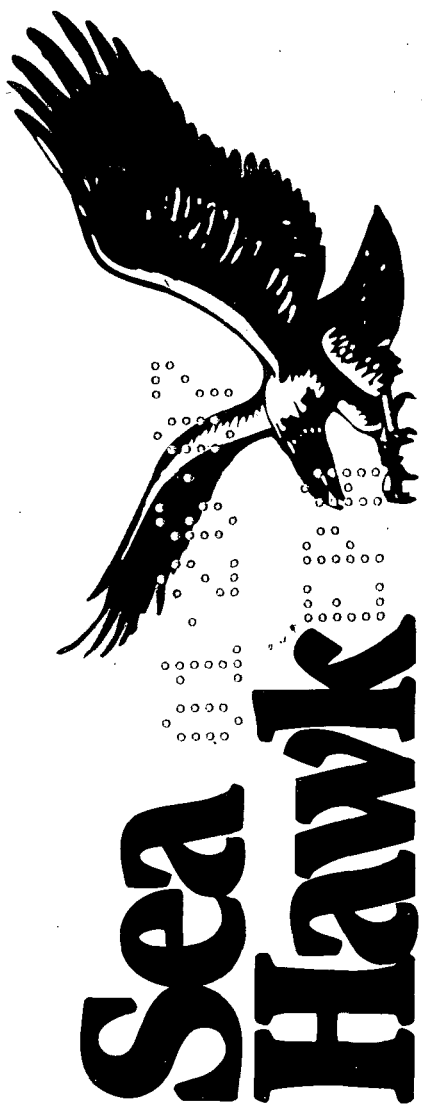

TROPIKOTE PRO ANTIFOULING COATING 6000 SERIES

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL
COATINGS, INC.
14805 49th Street North
Clearwater, FL 33762
www.seahawkpaints.com

ACTIVE INGREDIENT: Cuprous Oxide	45.2%
INERT INGREDIENTS	54.8%
TOTAL	100.00%
Copper expressed as metallic 42.21%	
Contains petroleum distillates	

KEEP OUT OF REACH OF CHILDREN
WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty of this product, expressed or implied.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Traditional, hard, modified epoxy antifoulant that controls the attachment of barnacles, algae, seagrass, green weed and other fouling organisms in fresh and salt water. This product is only for use on the surfaces of hulls on boats, yachts, barges, crab pots and lobster pots.

SHAPE/COLOREDLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION

Finish/Sheet: Seal Gloss

Converter: One Pack

Copper Content: 45%

Xylene Solids: 62% ± 2%

Ratio: One Pack

Shipping Weight: 22-24 Lbs./Gal.

Flash Point: 80°F

Film Thickness: 5 mils wet equals 3.1 dry per coat

Overcoating Interval

Drying Time (Hrs)

Substrate Temp. Touch Min. Max. Launch

73°F (23°C) 1 Hr 1 Hr 12 Hrs

95°F (35°C) 1 Hr 1 Hr 12 Hrs

REGULATORY DATA

VOC: 330 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above

50°F (10°C). Surface temperature must be at least 50°F (10°C) above dew point. For

optimum application properties, bring material to 70-80°F (21-27°C) temperature

range prior to mixing and application. Unmixed material (in closed containers)

should be maintained in protected storage between 40 and 100°F (4-38°C).

Prolonged atmospheric exposure of this product may detract from performance.

Technical and application data herein is for the purpose of establishing a general

guideline for the coating and the proper coating application procedures. As

application, environmental and design factors can vary significantly, due care should

be exercised in the selection, verification of performance and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease,

oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SP1)

New Construction: As yard procedures may vary, consult with your Sea

Hawk Representative.

APPLICATION: Apply by brush, roller or spray. Apply 5 mils wet, which will

yield 3.1 mils dry per coat.

EQUIPMENT

Brush: China Bristle

Roller: Solvent Resistant Roller Cover 3/8" pile smooth to medium. Prewash

Roller Cover to remove loose fibers prior to use.

Airless Spray: Minimum 28:1 ratio pump; "0.021-0.026" (533-660 microns)

orifice tip; 3/8" ID high-pressure material hose; 90 PSI line pressure; 60 mesh filter.

THINNING: We do not recommend thinning. However, if thinning is necessary,

thin up to a maximum of 10%, with Sea Hawk 2033-2035 only.

CLEANUP: Clean all equipment immediately after use with xylene. It is good

practice to periodically flush out spray equipment during the course of the day.

Frequency depends upon the amount sprayed, temperature, elapsed time including

delay, etc.

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

Storage: Do not store near heat or open flame. Store in well-ventilated area.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess

pesticide, spray mixture, or rinsate is a violation of Federal Law. If these

wastes cannot be disposed of by use according to label instructions, contact

your State Pesticide or Environmental Control Agency, or the Hazardous

Waste representative at the nearest EPA Regional Office for guidance.

Container Disposal: Triple rinse (or equivalent). Then offer for recycling

or reconditioning, or puncture and dispose of in a sanitary landfill, or by

other procedures approved by state and local authorities.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: May be fatal if swallowed or inhaled. Causes moderate skin

and eye irritation. Harmful if absorbed through skin. Prolonged or

frequently repeated skin contact may cause allergic reactions in some

individuals. Do not breathe vapors, spray mist, or dust or chips from

sanding. Avoid contact with skin, eyes or clothing. While spraying paint or

sanding boat surface, wear a mask or pesticide respirator jointly approved

by the Mine Safety and Health Administration and the National Institute

for Occupational Safety and Health. Wear protective clothing (long-

sleeved cotton shirt, long pants and hat) and gloves (such as nitrile or

butyl). Wash thoroughly with soap and water after handling and before

eating, drinking or using tobacco. Remove contaminated clothing and

wash before reuse. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning

of equipment or disposing of wastes. Do not allow chips and dust

generated during paint removal to enter water. Dispose of paint debris in

an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near heat or open flame.

FIRST AID

IF SWALLOWED: • Immediately call a poison control center or doctor • Do not induce vomiting

unless told to do so by a poison control center or doctor • Do not give any liquid

to the person • Do not give anything by mouth to an unconscious person.

IF INHALED: • Move person to fresh air • If person is not breathing, call 911 or an ambulance,

then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a

poison control center or doctor for further treatment advice.

IF IN EYES: • Hold eye open and rinse slowly and gently with water for 15-20 minutes.

• Remove contact lenses, if present, after the first 5 minutes; then continue

rinsing eye. • Call a poison control center or doctor for treatment advice.

IF ON SKIN OR CLOTHING: • Take off contaminated clothing. • Rinse skin immediately with plenty of water

for 15 - 20 minutes. • Call a poison control center or doctor for treatment advice.

Have the product container or label with you when calling a poison control center or doctor, or going

for treatment. You may also contact 1-800-528-0897 for emergency medical treatment information.

NOTE TO PHYSICIAN: Contains petroleum distillate, vomiting may cause aspiration pneumonia.

E.P.A. Registration No. 44891-11 / E.P.A. Establishment No. 44891-FL-1