

44891-12

8-5-2003

1/5

[FRONT PANEL]

Sea Hawk

(Picture of Sea Hawk here)

Yacht Finishes

PREMIUM QUALITY

AF 33

Antifouling Paint

ACCEPTED
AUG 05 2003
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide registered under EPA Reg. No. 44891-12

[Optional proposed text appears in brackets - the final label may include some or all of the optional text]

[Paint Color and Number]

ACTIVE INGREDIENT:	
Cuprous Oxide	33.6%
OTHER INGREDIENTS:	66.4%
TOTAL:	100.0%

KEEP OUT OF REACH OF CHILDREN

WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty for this product, expressed or implied

2/5

[FRONT SIDE PANEL]

Net Contents
1 Gallon
U.S. Measure
3.785 Liters

NEW NAUTICAL COATINGS, INC.
14805 49th Street North
Clearwater, FL 33762
www.seahawkpaints.com

ACCEPTED

AUG 05 2003

Under the Federal Insecticide, Fungicide, and
Rodenticide Act, amended for the
pesticide registration under
EPA Reg. No. **44891-12**

[BACK PANEL]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION


AF 33 is a self polishing antifouling that controls the attachment of barnacles, algae, seagrass, green weed and other fouling organisms in fresh and salt water. This product is designed for use on the surfaces of hulls on ships, boats, barges, crab pots, fish nets, traps, lines, docks, walls, or any other surface that is prone to fouling.

Shake vigorously for several minutes with a mechanical paint shaker before use. Due to settlement of copper in the product if this product is not properly shaken it may become ineffective.

APPLICATION DETAILS

Apply product generously on the surface to be coated. More coats will ensure a longer life. Do not apply product during moist conditions such as rain or high humidity. Due to the nature of this product it is not intended for fast moving vessels. Wait at least 12 hours before submerging in water.

Sweat In Time: Not Applicable
Thinner: 2033-2035
Cleaner: Sea Hawk Xylene 7130

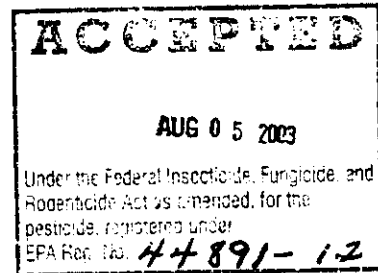

REGULATORY DATA

VOC: 310 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50° F (10° C). Surface temperature must be at least 50° F (10° C) above dew point. For optimum application properties, bring material to 70-80° F (21-27° C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100° F (4-38° C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating application procedures. As application, environmental and design factors can vary significantly, due care should be exercised in the selection, verification of performance, and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SPI)

4/5

[BACK PANEL CONTINUED]

APPLICATION: This product can be applied by brush, roller, or spray.

THINNING: We do not recommend thinning of this product.

CLEANUP: Clean all equipment immediately after using with Sea Hawk Xylene 7130.

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near open heat or flame. Store in well ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.


CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

WARNING. May be fatal if swallowed or inhaled. Causes moderate eye irritation. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not breath vapors, spray mist, dust or chips from sanding. Avoid contact with skin, eyes or clothing. Wash spraying paint or sanding surface, wear a mask or pesticide respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Wear protective clothing (long-sleeved cotton shirt, long pants, and hat) and gloves (such as nitrile or butyl). Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Use adequate ventilation.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

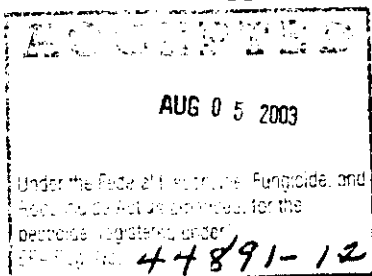

5/5

[BACK PANEL CONTINUED]


PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near open flame.

FIRST AID	
If in eyes	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
If swallowed	<ul style="list-style-type: none"> • Call poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
If on skin or clothing	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
If inhaled	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
<p>Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-528-0997 for emergency medical treatment information.</p>	

EPA Reg. No. 44891-12

EPA Est. No. 44891-FL-1

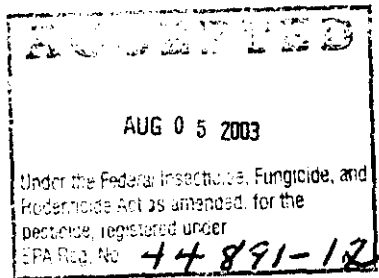

REVISED: 06-04-03
S:\MAIN\NEW NAUTICAL COATINGS, INC.\LABELS\SEA HAWK AF 33