
Reg no: 44949-4

PM-31

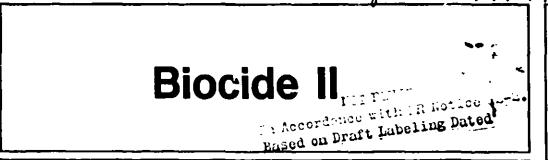

| ACTIVE INGREDIENT: | |
|---|-------|
| Potassium dimethyldithiocarbamate 10 | 0.0% |
| INERT INGREDIENTS 90 | |
| This product contains 0.87 lb. of active ingredient per gallon and we | eighs |

8.68 lb. per gallon.

KEEP OUT OF REACH OF CHILDREN DANGER

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes eye and skin damage. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Avoid contamination of food. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly after handling.

STATEMENT OF PRACTICAL TREATMENT: In case of skin contact, wash with plenty of soap and water. Remove contaminated clothing and wash before reuse. If product gets in the eyes, flush immediately with copious amounts of clean, cool water for at least 15 minutes. Get medical attention immediately. If product is swallowed, promptly drink 1 or 2 glasses of water. Contact a physician or Poison Control Center immediately. DO NOT INDUCE VOMITING.

Note to physician: Probable mucosal damage may contraindicate gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not discharge effluent containing this active ingredient into lakes, streams, ponds, est Jaries, oceans, or public waters unless this product is specifically identified and addressed in an NPDES permit. Do not discharge effluent containing this product to sever systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

Manufastured by: Carochem, Inc. 540 Gulf St P. O. Box 11247 Durham, NC 27703 EPA REG. NO. <u>4949-4</u> EPA EST. NO. _____

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Biocide II is used in industrial and/or commercial recirculating cooling tower systems and industrial air-washing systems to control microbiological slime. Prior to the use of Biocide II in industrial and/or commercial recirculating cooling tower systems, systems should be cleaned to remove atgal growth, microbiological slime, and other deposits. Then make an initial slug addition of 12.0 to 17.9 fl. oz. of Biocide II per 1000 gal. of water to provide 100 to 1. " ppm of Biocide II, based on total weight of water in the system. Repeat initial dosage until control is evident. Make subsequent slug addition of 6.0 to 17.9 fl. oz. of Biocide II per 1000 gal. of water (50 to 150 ppm Biocide II every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bieedoff and the severity of the microbiological problem. Slug additions should be made in the sump of recirculating cooling tower systems.

Biocide II is used in industrial air-washing systems which maintain effective misteliminating components. Prior to its use, systems should be cleaned to remove bacteria slime and other deposits. An initial slug dose of 28.1 to 35.9 fl. oz. of Biocide II per 1000° gal. of water is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 21.0 to 35.9 fl. oz. of Biocide II per 1000 gallons of water should be employed every 1 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and severity of the bacterial problem. Slug additions may be made to the sump or the water collection trays of the airwash system.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than four drums high. Leaking or damaged drums should be placed in overpack drums for disposal. Specific should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to tabel instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidence.

CONTAINER DISPOSAL:

- PLASTIC: Triple rinae (or equivalent). Then ulter for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.
- METAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.