



045017-00046-110596

Printed: 09:38:05 Thursday, 24 Jun, 1999 # 8 / 3408

Systems Integration Group, Inc.

DARACIDE® 7816

Controls bacterial and fungal slime in paper mills and process water systems

Active ingredient:

4,5-dichloro-1,2-dithiol-3-one	2.5%
Inert ingredients:	97.5%
TOTAL:	100.0%

EPA Reg. No. 4643-52
EPA Est. No. 4643-IL-1

DANGER

KEEP OUT OF REACH OF CHILDREN

Precautionary Statements:

HAZARDS TO HUMANS AND DOMESTIC ANIMALS. DANGER.

Corrosive, causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed.

Wear rubber or other chemical resistant gloves and goggles or face shield when opening the drum vents and bungs and when connecting and disconnecting pump and delivery line fittings to the drum or to the receiving vessels.

Statement Of Practical Treatment:

A 1% - 3% solution of sodium thiosulfate ("hypo") should be kept available for first aid treatment of accidental eye or skin exposure to DARACIDE® 7816.

IF IN EYES: Flush with plenty of 1 - 3% solution of sodium thiosulfate (hypo) solution, followed by rinsing with water for at least 15 minutes. Seek medical attention if irritation persists.

IF ON SKIN: Flush with plenty of 1 - 3% solution of sodium thiosulfate (hypo) solution, followed by rinsing with water. Discard contaminated clothing. Seek medical attention if irritation persists.

IF SWALLOWED: Immediately drink 1 or 2 glasses of milk or several spoonfuls of vegetable oil. Never give anything by mouth to an unconscious person. Do not induce vomiting. Seek medical attention at once.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and aquatic invertebrates. Do not use in facilities discharging directly or indirectly to estuarine or marine environments. Do not discharge into lakes, streams, ponds or public waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System Permit (NPDES) and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

The contents may be under pressure when the drum is opened and care must be exercised in opening the drum, in making pump and delivery line connections, and disconnecting such lines to avoid inadvertent splashing or exposure. Be sure to relieve all pressure in the drum and/or delivery lines prior to opening the drum or disconnecting the lines. Drum pressure may be relieved by opening the pressure vent prior to opening the bung. Delivery system pressure should be bled and delivery pumps turned off prior to disconnecting delivery lines.

STORAGE AND DISPOSAL

Do not contaminate food, feed, or water by storage, disposal or by cleaning of equipment.

Container Storage: Store in a cool, dry place away from sunlight. Avoid extremes of temperature.

Container Disposal: Rinse empty container with dilute sodium thiosulfate, followed by triple rinsing with water. Puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities. Do not reuse container.

Waste Disposal: Pesticide wastes are acutely hazardous. Improper disposal or excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to the label

instructions, contact your State Pesticide or Environmental Control Agency or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

Paper Mills And Paper Process Water Systems:

DARACIDE 7816 should be added to the system at a point of uniform mixing such as the fan pump, head box, make-up water pumps, shower headers, clarified water or white water systems.

Apply 0.10 to 0.80 lb DARACIDE 7816 per ton (dry basis) of pulp or paper produced. Additions may be continuous or intermittent, depending on the type of system and the severity of contamination.

Water treated with DARACIDE 7816 should not be used in the manufacture of paper used for food packaging.

NOTICE: Seller warrants that this product conforms to its chemical description on the label and is reasonably fit for the purposes stated on the label when used in accordance with the label directions under normal conditions. This warranty does not extend to, and Buyer assumes all risk for, any and all loss or damage resulting from the use of this product in any manner contrary to label directions or warnings.

THE FOREGOING LIMITED WARRANTY IS EXCLUSIVE AND IS GIVEN AND ACCEPTED IN LIEU OF ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. SELLER'S LIABILITY SHALL BE LIMITED TO THE PURCHASE PRICE OF THE PRODUCT. THE REMEDIES OF BUYER FOR ANY BREACH OF WARRANTY SHALL BE LIMITED, IN SELLER'S DISCRETION, TO REPLACEMENT OF NONCONFORMING PRODUCT OR REFUND OF PURCHASE PRICE. IN NO EVENT SHALL SELLER BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.


Net Weight: 55 gal drum - 477 lbs
200 gal tote - 1584 lbs
400 gal tote - 3080 lbs

10/96
DARA7816

GRACE Dearborn

W. R. Grace & Co. - Conn., 300 Genesee Street, Lake Zurich, IL 60047-2458 (800) 323-7551

REDUCED 26%

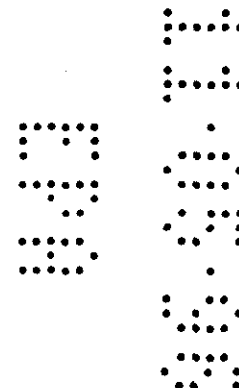

PM 34
45017-46
11/5/96
page 1 of 1