

containing resins and other materials weathering will enhance paint adhesion. This colorless product offers a penetrating fungicide which will not bloom.

Notes to User: **M-750 Clear Formula Wood Preservative** is recommended for above ground use and may be used in some ground contact applications. **M-770 Green Formula Wood Preservative** offers maximum protection when material is in constant contact with wet soil or water. Do not apply over painted or varnished surfaces or bark. Do not use on wood intended for food, feed, potable water, livestock, or dairy animal contact surfaces. May injure living plants during application. Cover plants to protect against direct contact. Reapplication is recommended every three years on wood roofs. Zinc Naphthenate contained in this formula will turn redwood black. M-750 Clear Formula Wood Preservative exceeds the Federal Specification for Water Repellency, TT-W-572b.3.7. While protecting against mildew, fungus, and rot, M-750 Clear Preservative does not prevent the "natural graying" of wood fiber exposed to ultra-violet rays.


Surface Preparation: Materials to be preserved must be clean, dry, and free of mildew. Light dust and dirt should be removed by brushing, and washing down with a garden hose. Heavily soiled materials should be washed with a proper detergent solution or power washed with a high pressure hose and allowed to dry thoroughly. **NOTE:** If mildew is present, prior to washing the surface, saturate the affected areas with a solution of one part bleach and three parts water (until discoloration disappears), then flush by hose. Severe cases may require a stronger solution. **CAUTION:** Household bleach can cause irritation and minor burns to skin. Follow manufacturer's precautions. Use protective clothing, eye goggles and rubber gloves.

depending upon porosity of the wood and method of application. Pine species absorb more preservative, dipping likewise. **Fabric and Cordage:** 75 square feet per gallon. **Drying Time:** Wood Preservative Clear Formula will require 24 hours to dry under ideal weather conditions. **Clean up:** Clean tools and spills with mineral spirits.

CAUTION: Do not take internally. Close Container After Each Use. **COMBUSTIBLE:** Do not use, pour, spill or store near heat or open flame. **KEEP OUT OF THE REACH OF CHILDREN.**

Guarantee: If after proper application, MAXUM Wood Preservative should crack, peel, or blister, replacement gallons will be furnished free of charge or a refund of the product cost (made at the manufacturer's option). Cracking, peeling or blistering caused by a breakdown of a previous coating or deterioration of the substrate are not covered by this guarantee. Labor cost to apply any material and any consequential damages are excluded from this guarantee.

For More Information Consult Your Maxum Dealer

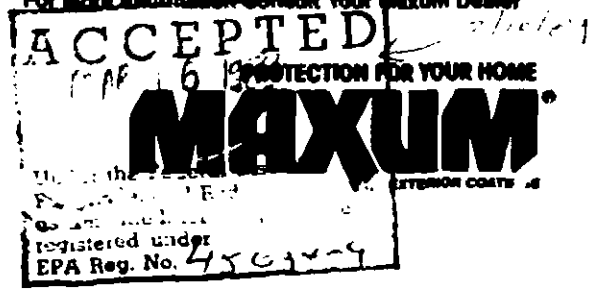

distributed by PREMIER COATINGS, INC., ELK GROVE VILLAGE, IL 60007

BEST AVAILABLE COPY