

NOTICE OF PESTICIDE: REGISTRATION
 REREGISTRATION

(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

NAME OF PESTICIDE PRODUCT

CT-281

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Water Engineering Services, Inc.
22 East Buchanan
Phoenix, AZ 85004

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.


Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:

1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
2. Add the phrase "EPA Registration No. 46372-14" to your label before you release the product for shipment.
3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

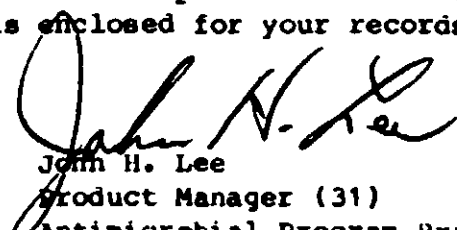

John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (TS-767C)

Enclosures

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

DATE

ACCEPTED
with COMMENTS
in EPA Letter Dated:

CT-281

DEC 02 1988

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide
under EPA Reg. No.

INDUSTRIAL MICROBICIDE

46372-14

ACTIVE INGREDIENT:

2-(Thiocyanomethylthio)benzothiazole 5%

INERT INGREDIENTS (Contains Petroleum Distillates) 95%

This product weighs 7.84 pounds per gallon.

**KEEP OUT OF REACH OF CHILDREN
DANGER**

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes irreversible eye damage. Causes skin damage. This product may cause allergic skin reactions. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed.

FIRST AID: *If in eyes,* flush with plenty of water. Get medical attention. *If on skin,* wash with plenty of soap and water. Get medical attention. *If swallowed,* drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

Note to physician: Probable mucosal damage may contraindicate gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not use in offshore or estuarine drilling operations. Do not discharge into lakes, streams, ponds, or public waters unless in accordance with a NPDES Permit. For guidance, contact the regional office of the Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS: Do not use or store near heat or open flame.

STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than five drums high. Drums should be opened in well-ventilated areas. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinse is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT WITH ITS LABELING. Technical assistance in applying microorganism control as described in the following is available if a problem is provided.

COOLING TOWERS: _____ CT-281

wood against soft or surface rot and internal or dry rot. It is containing 3.0 to 4.2% _____ CT-281 surfaces. The amount applied should provide 3.6 to 4.8 lb per 1000 ft² of wood surface. Soft or surface rot can also be controlled by _____ CT-281 to the recirculating well. The dosage should provide 7.5 lb of _____ CT-281 water and the bleedoff should be stopped for 4 to 6 hr after repeated every four months.

COOLING WATER: _____ CT-281 and fungi in industrial recirculating cooling water system should be cleaned thoroughly to remove old algal growth, mildew, and other debris. The system should then be drained, flushed, refilled with water, and the bleedoff should be stopped for 4 to 6 hr after repeated every four months.

DRILLING FLUIDS: To inhibit bacterial and fungal degradation of wells, _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid. For secondary recovery, _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

PETROLEUM SECONDARY RECOVERY: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

REFINED OILS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

CUTTING FLUIDS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

MANUFACTURED WATER: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

REFINED OILS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

CUTTING FLUIDS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

MANUFACTURED WATER: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

REFINED OILS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

CUTTING FLUIDS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

MANUFACTURED WATER: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

REFINED OILS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

CUTTING FLUIDS: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

MANUFACTURED WATER: _____ CT-281 is recommended at concentrations of 0.3 to 1.5% based on the total wet weight of the drilling fluid.

Manufactured by
WATER ENGINEERING SERVICES
22 EAST BUCHANAN
PHOENIX, AZ 85004

EPA REG. NO. _____ EP

NET CONTENTS _____