



Stain & Wood PRESERVATIVE

SOLID COLOR


KEEP OUT OF REACH OF CHILDREN.
WARNING! COMBUSTIBLE.
See other precautions on back panel.

ACTIVE INGREDIENT:
3-Iodo-2-Propynyl Butyl Carbamate 8.43%
INERT INGREDIENTS: 99.57%
TOTAL..... 100.00%

CONTAINS PETROLEUM DISTILLATES
EPA EST. NO. 47098-MJ-2 EPA REG. NO. 47098-2

1 GALLON 3.785 LITERS

LEHMAN BROS., INC. JERSEY CITY, NJ 07305

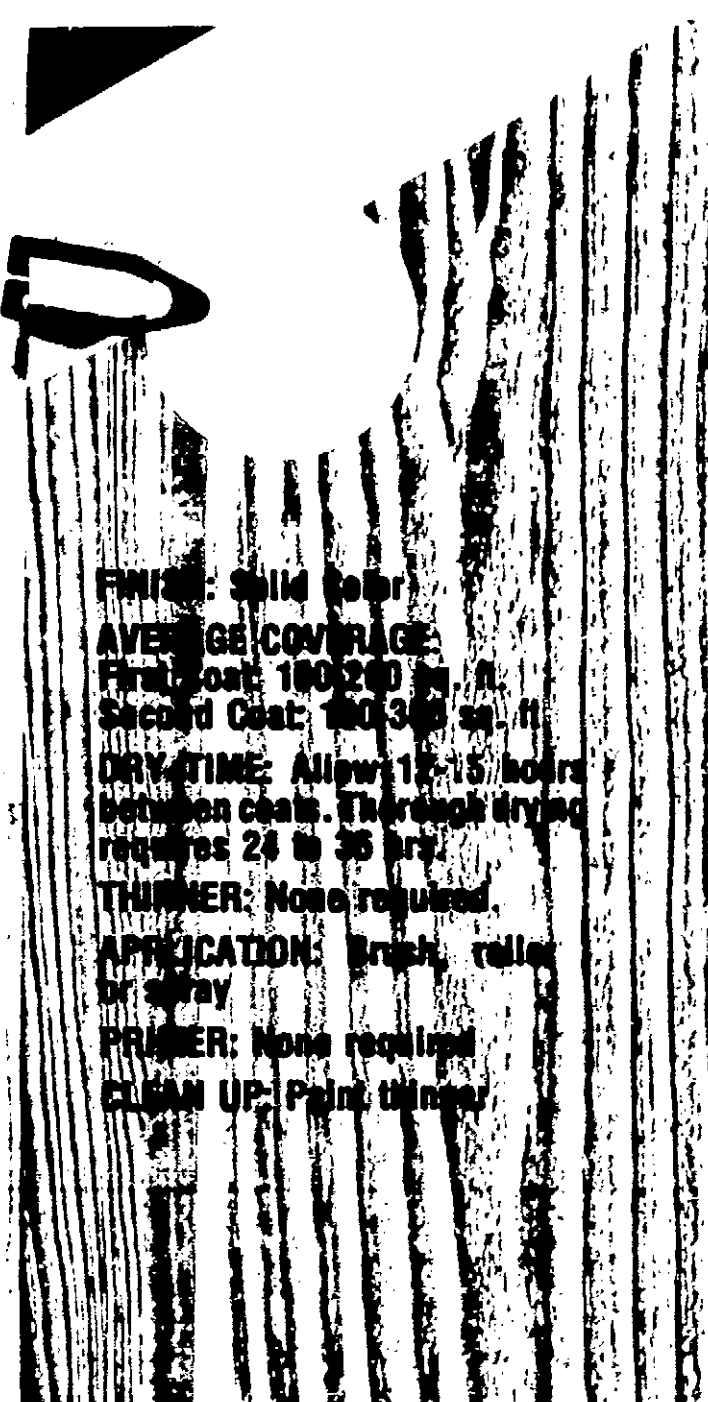

FINISH: Solid color
AVERAGE COVERAGE:
First Coat: 100-200 sq. ft.
Second Coat: 100-300 sq. ft.
DRY TIME: Allow 12-15 hours
between coats. Thorough drying
requires 24 to 36 hrs.
THINNER: None required.
APPLICATION: Brush, roller
or spray.
PRIMER: None required.
CLEAN UP: Paint thinner.

OX LINE STAIN AND WOOD PRESERVATIVE SOLID COLOR

OX LINE oil stain and wood preservative is formulated to protect wood surfaces against fungi that causes mildew staining and wood rotting. Recommended for use on shingles, shakes, fences and smooth or rough cut wood siding. **CAUTION:** Not recommended for primed or previously painted surfaces and wood which comes in ground contact. Also, do not use on decks and other high-wear areas. May be applied to previously stained surfaces of similar or lighter color.

In most cases, one coat is sufficient for full protection. For porous or badly weathered surfaces, a second coat is recommended. Solid color stain coats the surface and penetrates the wood, allowing the wood texture to show. If repainting eventually is desired, surface must be well weathered (6-9 months).

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. Surface must be clean and free of dirt, oil, grease and mildew. Consult dealer for removing mildew to restore natural tone of wood. Mix well before application. Always buy enough stain for the complete job. Close container after each use.

APPLICATION: Apply liberally, covering a small area at a time and keeping a wet edge to avoid lap marks. Work in the direction of the wood grain. Do not stop in the middle of an area; work to edges or corners. If possible, avoid direct sunlight when applying by following the shaded side around the house. Do not apply over wood that is painted or varnished. Since wood itself may vary in color and texture, and different woods show stain differently, test the stain first on similar type wood.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: CONTAINS PETROLEUM DISTILLATES. Use only with adequate ventilation. Avoid prolonged breathing of vapor or spray mist. Causes substantial but temporary eye injury. Do not get in eyes or on clothing. Wear goggles. Harmful if swallowed. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before re-use.

STATEMENT OF PRACTICAL TREATMENT: IF IN EYES: Flush with plenty of water. Get medical attention.

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

ENVIRONMENTAL HAZARDS: Do not apply directly to water. This product is toxic to fish. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

PHYSICAL AND CHEMICAL HAZARDS: COMBUSTIBLE: Do not use, pour or spill near heat or open flame. In case of fire, use water spray, foam, carbon dioxide or dry chemical.

STORAGE AND DISPOSAL:

PROHIBITIONS - Do not contaminate water, food or feed by storage or disposal. Do not store near heat or open flame.

PRODUCT DISPOSAL - Product or rinsate that cannot be used according to label instructions must be disposed of according to Federal, State or local procedures under the Resource Conservation and Recovery Act.

CONTAINER DISPOSAL - Do not reuse empty container. Destroy container by perforating or crushing. Wrap container and put in trash collection.

From the laboratories of

LEHMAN BROS. CORP. JERSEY CITY, NJ 07305