

# TRIS NITRO<sup>®</sup> BRAND OF 50% AQUEOUS TRIS(HYDROXYMETHYL)NITROMETHANE INDUSTRIAL BACTERIOSTAT

<b>ACTIVE INGREDIENT:</b>		
2-Hydroxymethyl-2-nitro-1,3-propanediol .....	50%	
<b>INERT INGREDIENTS:</b> .....	50%	
		<b>100%</b>

**ACCEPTED**  
 JUL 19 1985  
 48301-11

## PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS

**KEEP OUT OF REACH OF CHILDREN**

## CAUTION!

- AVOID CONTACT WITH EYES
- HARMFUL IF SWALLOWED. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING OR SMOKING.
- HARMFUL IF INHALED. AVOID BREATHING SPRAY MIST. REMOVE CONTAMINATED CLOTHING AND WASH BEFORE REUSE.

## STATEMENT OF PRACTICAL TREATMENT

- IF SWALLOWED: Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.
- IF IN EYES: Flush with plenty of water. Call a physician.
- IF ON SKIN: Wash thoroughly with soap and water.
- IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration and get medical attention.

## ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply in marine and/or estuarine oil fields. Do not discharge into lakes, streams, ponds, or public waters unless in accordance with a NPDES permit. For guidance, contact your Regional Office of the Environmental Protection Agency. Do not contaminate waters by cleaning of equipment or disposal of wastes.

## STORAGE AND DISPOSAL

- STORAGE:** Freezes at 60°F.  
Store in a warm place.  
TRIS NITRO decomposes in the presence of alkaline materials. Protect from vapors of ammonia and amines during handling and storage to prevent deterioration and release of formaldehyde.
- DISPOSAL:** Do not contaminate water, food, or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility. Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

See Additional Precautionary Statements on Side Panel and in Technical Bulletin.

E.P.A. Reg. No. 48301-11

A-67A-1  
Printed in U.S.A.

ANGUS Chemical Company assumes no responsibility when this product is not used in accordance with the instructions and information contained on this label.

# ANGUS<sup>®</sup>

ANGUS Chemical Company  
2211 Sanders Road  
Northbrook, IL 60062 U.S.A.

## DIRECTIONS FOR USE

Federal law prohibits use of this product in a manner inconsistent with its labeling.

### USE IN METALWORKING FLUIDS

In Diluted Fluids: A concentration of 1000 to 2000 ppm of active TRIS NITRO in the fluid is sufficient to control gross bacterial growth. Add 1-2 quarts of 50% aqueous TRIS NITRO per each 100 gallons of fluid.

Maintenance Dosage: Add 250 to 500 ppm of active TRIS NITRO weekly as required to maintain control of the system. The addition of 0.25 quart of 50% aqueous TRIS NITRO to each 100 gallons of fluid will provide a 250 ppm concentration.

In Concentrates: TRIS NITRO may be incorporated by the manufacturer in metalworking fluid concentrate. The higher levels required in such concentrates will be stable as long as the pH is maintained in the range of 6 to 8. Above such pH levels rapid deterioration of TRIS NITRO may result in the release of noticeable levels of formaldehyde. Long-term stability tests should be carried out by the manufacturer on his specific formulation to ensure that the concentrate does not contain ingredients incompatible with TRIS NITRO stability. The amount to be incorporated will depend on the dilution factor recommended to be used when the concentrate is diluted for use. For efficient bacteriostatic activity, a concentration of 1000 to 2000 ppm of active TRIS NITRO in the diluted fluid is suggested.

### USE IN INDUSTRIAL RECIRCULATING WATER SYSTEMS

For control of bacteria in industrial cooling towers and evaporative condensers, treat the system with 500-1000 ppm of active TRIS NITRO.

Initial dose: When the system is noticeably fouled, add 0.5-1 gallon of 50% aqueous TRIS NITRO per 1000 gallons of water in the system. Repeat until control is achieved. Badly fouled systems must be cleaned before initial treatment.

Subsequent dose: Add 0.25-1 quart of 50% aqueous TRIS NITRO per 1000 gallons of water in the system as needed to maintain control.

### USE IN OILFIELD WATER SYSTEMS

For controlling aerobic slime-forming bacteria (*Pseudomonas* sp.) and anaerobic sulfate-reducing bacteria (*Desulfovibrio desulfuricans*) in oilfield water systems, such as subsurface injection water, add 500-1000 ppm active TRIS NITRO depending on the severity of the contamination. Additions should be made with a metering pump at the free-water knockouts before or after injection pumps and injection well headers.

Continuous-feed method: If the system is noticeably fouled, add 500-1000 ppm active TRIS NITRO (80-160 gallons of 50% aqueous TRIS NITRO per 2000 barrels of water) continuously until the desired degree of control is achieved. Subsequently, treat with 500 ppm active TRIS NITRO (80 gallons of 50% aqueous TRIS NITRO per 2000 barrels of water) continuously as needed to maintain control.

Intermittent or slug method: If the system is noticeably fouled, or to maintain control of the system, add 500-1000 ppm active TRIS NITRO (80-160 gallons of 50% aqueous TRIS NITRO per 2000 barrels of water) intermittently for 2-8 hours per day on from 1-4 days per week, depending on the severity of contamination.

### USE AS A PRESERVATIVE FOR PACKAGE EMULSIONS, SOLUTIONS, OR SUSPENSIONS SUCH AS DETERGENTS AND POLISHES CONTAINING WATER.

For control of bacterial contamination add 500-1000 ppm of active TRIS NITRO (1-2 gallons of 50% aqueous TRIS NITRO) per 1000 gallons of formulation.

### USE IN DRILLING MUDS

For control of sulfate-reducing bacteria in water-based drilling muds, add 0.5 quart-1 gallon of 50% aqueous TRIS NITRO to 1000 gallons of drilling mud.

### USE IN PULP AND PAPERMILL PROCESS WATER SYSTEMS

Do not use this product in any process which makes paper or paperboard that will come in contact with food or feed. For control of bacterial growth in pulp, paper, and paperboard mills, add 50% aqueous TRIS NITRO at the rate of 0.25-1.0 gallon per ton of pulp or paper (dry basis). Addition may be continuous or intermittent, depending upon the type of system and the severity of contamination. It should be made with a metering pump at a location that will insure uniform distribution of TRIS NITRO in the mass of fiber and water, such as at the beaters, jordan inlet or discharge, broke chests, furnish chests, save-alls and white-water tanks.


Heavily fouled systems should be boiled out; then treat with 1 gallon 50% aqueous TRIS NITRO per ton of paper (dry basis) as necessary for control.

Moderately fouled systems should be treated continuously with 0.25-1.0 gallon 50% aqueous TRIS NITRO per ton of paper (dry basis) on a continuous or intermittent basis as needed for control.

Slightly fouled systems should be treated continuously with 0.25 gallon 50% aqueous TRIS NITRO per ton of paper (dry basis) until control is achieved.

ANGUS CHEMICAL COMPANY

A-67A-2

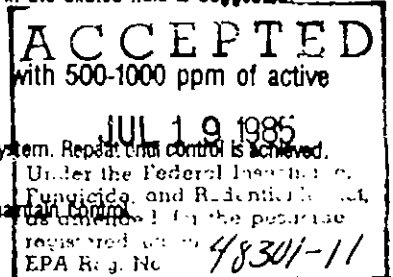

BEST AVAILABLE COPY

## Brand of 50% Aqueous TRIS(HYDROXYMETHYL)NITROMETHANE\*

TRIS NITRO is an anti-microbial agent particularly suited for the control of bacteria and slimes in industrial applications. It is available as a 50% aqueous solution of tris(hydroxymethyl)nitromethane.

Purified TRIS NITRO is a white crystalline solid which is quite stable when dry. At its melting point crystalline TRIS NITRO decomposes slowly, but there is no tendency for this decomposition to become self-sustaining because the reaction is endothermic.

TRIS NITRO is highly soluble in water and is quite stable in neutral or weakly acidic solution. However, in slightly alkaline solution TRIS NITRO slowly decomposes to release formaldehyde. Formaldehyde is released more rapidly as pH is increased. This release can be easily controlled by pH adjustment and/or temperature so that the working life of TRIS NITRO can be varied from a few minutes to several months according to conditions of use (See Figure 1).

### Physical Properties of Pure Tris(hydroxymethyl)nitromethane

Molecular weight (calculated)	151.124
Melting point (decoloration)	175-176 C
pH of 0.1 M aqueous solution at 20 C	5.0
Critical humidity point at 40 C	66% R.H.
Solubility in water at 20 C	220 g/100 ml

Very soluble in alcohols; insoluble in hydrocarbons such as heptane, diisobutylene, kerosene, styrene, mineral oil, benzene, toluene.

### Typical Physical Properties of the 50% Aqueous Solution


Crystallization point (approx.)	55 F
Specific gravity at 25/25 C	1.222

### Specifications of the 50% Aqueous Solution

TRIS NITRO, % by wt	50 (min)
Free formaldehyde, % by wt	1 (max)
pH as is	2.0-4.5
Color Gardner	5.0 (max)

### Shipping Containers

TRIS NITRO 50% aqueous solution is packaged in polyethylene containers with net weights of 10 lb, 45 lb, and 500 lb.

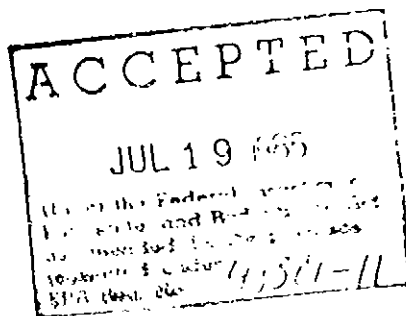

\*Indexed by *Chemical Abstracts* as 2-hydroxymethyl-2-nitro-1,3-propanediol. CAS Registry No. 126-11-4.

**BEST AVAILABLE COPY**

detectable.

The antimicrobial effectiveness of TRIS NITRO against many organisms is indicated by the following spectrum. Repeated transfers have been made with many of these organisms without any indications of a tendency to develop resistance.

The following information is intended *only* to indicate the broad-spectrum activity of the product. This information must *not* be interpreted as having relevance to the use pattern recommended, effective dosages, activity against specific microorganisms, or any other implications of effectiveness of formulated products.

### Antimicrobial Spectrum of TRIS NITRO 50% Aqueous (as supplied)

Organism	Minimum Inhibitory Concentration at pH 7.4
<i>Bacillus subtilis</i>	250-500 ppm
<i>Staphylococcus aureus</i>	65-125
<i>Streptococcus faecalis</i>	250-500
<i>Sarcina lutea</i>	125-250
<i>Escherichia coli</i>	500-1000
<i>Aerobacter aerogenes</i>	65-125
<i>Pseudomonas aeruginosa</i>	500-1000
<i>Salmonella typhi</i>	65-125
<i>Desulfovibrio aestuarii</i>	<33
<i>Cladosporium herbarum</i>	>2000
<i>Cephalosporium zneryes</i>	1000-2000
<i>Trichophyton mentagrophytes</i>	250-500
<i>Aspergillus niger</i>	>2000
<i>Aureobasidium pullulans</i>	>2000
<i>Fusarium moniliforme</i>	>2000
<i>Saccharomyces cerevisiae</i>	500-1000
<i>Candida albicans</i>	>2000

Many industrial operations involve the recirculation of fluids (water, oil, or emulsions) which are

4) Clogged pumps, valves, and filters.

### Water Treatment

TRIS NITRO is effective against those microorganisms such as slimes which cause problems in industrial water systems. It is recommended for use in cooling-tower systems. However, since the conditions of use would vary greatly, use recommendations will depend on the nature of the specific system.

### Metalworking Fluids

TRIS NITRO is an effective antimicrobial agent for the protection of metalworking fluids, i.e., cutting fluids and coolants for grinding and tooling operations. It has been shown to be effective in petroleum-based products, synthetic coolants, and semisynthetic fluids, such as those containing mineral oils, fatty oils, sulfurized fatty-mineral oil blends, sulfurized-chlorinated fatty-mineral oil blends, emulsifiable oils, glycols, or glycol-polyol esters.

Studies have demonstrated that 0.1% TRIS NITRO in a cutting oil formulation completely inhibited the growth of bacteria in the oil for a period of 60 days under conditions of optimum bacterial growth, and was more effective than over 100 compounds tested.

In another study 500 ppm of 50% aqueous TRIS NITRO was utilized to protect six different cutting fluids. Portions of these protected fluids were inoculated once a week with an inoculum containing

Petroleum coolant #1	0	49
Petroleum coolant #2	0	63
Synthetic coolant #1	0	42*
Synthetic coolant #2	0	35
Semisynthetic coolant #1	0	49
Semisynthetic coolant #2	0	70

\*Failure due to molds

### Oilfield Flooding

Unchecked growth of sulfate-reducing bacteria in oilfield flooding applications can lead to plugging and serious corrosion problems. Laboratory tests indicate that as little as 50-100 ppm of TRIS NITRO in the water is sufficient to inhibit these bacteria.

### Deodorizing Applications

TRIS NITRO is recommended as a component of deodorizing formulations such as those used in chemical toilets. Its controllable formaldehyde-releasing action eliminates odor problems associated with raw formaldehyde, and allows the formulator more latitude in choice of reodorants. TRIS NITRO is highly compatible with other deodorizers and sequestrants commonly used in these applications.

### Preservative for Packaged Emulsions, Solutions, or Suspensions

TRIS NITRO is an excellent alternative for formalin as a preservative for protection of emulsions, solutions, or suspensions from deterioration. The amount of TRIS NITRO

BEST AVAILABLE COPY

required for protection will vary with the type of product and the level of microbial contamination. For example, 500 ppm of active TRIS NITRO provided complete protection to a mineral oil emulsion throughout a 6-week study involving weekly inoculations with a mixed bacterial inoculum containing  $10^7$  organisms per milliliter.

### Drilling Muds

Drilling muds contain surfactants, carboxymethylcellulose, and other ingredients susceptible to attack by microorganisms, and therefore they must be protected.

TRIS NITRO is effective for the control of those microorganisms commonly encountered in this application. Use levels will vary with the degree of contamination, but in general, levels effective in cutting oils will be effective in drilling muds.

### Manufacturing Use in Formulated Antimicrobial Products

TRIS NITRO is an excellent active ingredient for the formulation of spray fumigants and other antimicrobial products. The TRIS NITRO in such products slowly decomposes to release formaldehyde. Properly formulated products should be buffered to insure that this release of formaldehyde does not occur until dilution by the end-user of the product. Manufacturers of such products are responsible for obtaining registration of their formulated products with EPA under provisions of the Federal Insecticide, Fungicide, and Rodenticide Act.

TRIS NITRO is effective as an antimicrobial agent because it slowly decomposes to release formaldehyde. Incorporation into a metalworking fluid concentrate may lead to premature decomposition and loss of potency. It therefore should be added to the cutting oil, cooling system, etc., only when the fluid is actually in service. It may be used as part

of an initial antimicrobial package and/or as an additive for the maintenance of protection as the fluid ages.

It is possible to incorporate TRIS NITRO into a concentrate package as for chemical toilets provided care is taken to buffer the system to acid pH. Dilution at the time such packages are placed in use will shift the pH to the basic side and allow TRIS NITRO to function as a formaldehyde donor. Such systems must be carefully balanced to insure compatibility and package stability of the various components.

### Environmental Considerations

When properly used and disposed of, TRIS NITRO will have no measurable effect on the environment. As an antimicrobial agent for industrial applications, TRIS NITRO should never be released directly to the environment if materials containing it are properly handled. For example, cutting oils are harmful to fish and wildlife if released directly to water courses even if they do not contain TRIS NITRO. Such materials must always be treated physically, chemically, and/or biologically in industrial treatment systems to render them harmless before disposal.


TRIS NITRO provides protection from microbial contamination under alkaline conditions by decomposing to release formaldehyde. TRIS NITRO in any alkaline fluid will, in time, break down (see Figure 1). Even when a fluid has been treated a number of times, TRIS NITRO will not increase in concentration in the system. Used cutting fluids, for example, will have much lower TRIS NITRO concentrations than when freshly prepared, and the remaining TRIS NITRO will degrade. A study has shown that low concentrations of TRIS NITRO are assimilated by sludge obtained from a municipal sewage system.

When properly handled and disposed of, TRIS NITRO will not be released directly to the environment. Nevertheless, studies have been conducted to assess the possible effects on wildlife which might result from improper handling or accidental spills of the compound.

The 5-day dietary  $LC_{50}$  in mallard ducks was found to be in excess of 80,000 ppm of TRIS NITRO (expressed as the 50% solution). The  $LC_0$  was in excess of 40,000 ppm. The symptoms of toxicity seen at doses of 20,000 ppm or more appeared to be reversible when the birds were fed an untreated diet for 16 days post-treatment. All birds were normal when fed 2500, 5000, or 10,000 ppm TRIS NITRO.

The 5-day dietary  $LC_{50}$  in bobwhite quail was found to be in excess of 5000 ppm of TRIS NITRO (expressed as the 50% solution). No symptoms suggestive of toxicity were seen in birds fed 1250, 2500, or 5000 ppm TRIS NITRO.

The  $LC_{50}$  of TRIS NITRO for rainbow trout was calculated at 410 ppm. This implies that TRIS NITRO Technical is practically nontoxic to trout.

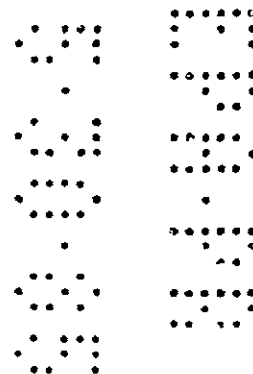

## Toxicity

### Acute Oral Animal Studies

A seven-day study on TRIS NITRO crystals given by gavage was conducted in mice with the following results:

LD <sub>0</sub>	1000 mg/kg
LD <sub>50</sub>	1900 ± 350 mg/kg
LD <sub>100</sub>	3000 mg/kg

In a similar 14-day study of 50% aqueous TRIS NITRO in rats, the LD<sub>50</sub> was determined to be 1875 mg/kg.

### Intraperitoneal Study in Mice

In a seven-day study in mice TRIS NITRO crystals gave the following results by the intraperitoneal route:

LD <sub>0</sub>	1000 mg/kg
LD <sub>50</sub>	1850 ± 340 mg/kg
LD <sub>100</sub>	3000 mg/kg

### Skin Irritation Studies

In another study, TRIS NITRO 50% aqueous diluted with distilled water to 1000 ppm, 3000 ppm, and 10,000 ppm active ingredient in water was applied to the skin of six rabbits. No skin irritation was observed for any of the exposed animals after 24 hours exposure.

A series of 48-hour patch tests was conducted by an independent dermatologist on 25 human volunteers using TRIS NITRO at concentrations of 0.3% and 0.6% in some typical cutting-oil emulsions. Another group was exposed to the cutting oil alone without TRIS NITRO. The tests were severe in that they were conducted with concentrations of TRIS NITRO considerably higher than any that have been found necessary to protect the emulsions from bacterial contamination. Both the closed and open methods of application were employed. The closed method insured maximal contact of the preparation with the skin and minimal loss by evaporation or wiping on the subject's clothing.

There was absolutely no skin irritation in either the open or closed tests on any of the 25 subjects.

In order to check on the sensitizing potential of aged cutting-oil emulsions containing TRIS NITRO, a series of human patch tests was conducted by another independent organization. The subjects were housewives, 30-65 years of age. The tests consisted of three successive patch exposures of 24 hours duration with 24 hours or more between exposures. The three compositions employed consisted of (a) a typical cutting-oil emulsion without TRIS NITRO, (b) the same emulsion to which 0.5% TRIS NITRO had been added just before use in the test, (c) the same emulsion to which 0.5% TRIS NITRO had been added some time previously so that aging effects would have had ample opportunity to develop. The results of this test showed that addition of 0.5% TRIS NITRO (five to ten times as much as normally used) caused no increase in irritating effect whether it was added just before use or some time previously. The dermatologist concluded that normal users of the emulsions would not be expected to experience any primary irritation under the usual conditions of use.

These findings are ample evidence that TRIS NITRO is not a primary irritant and that the sensitizing potential is minimal. A small but significant proportion of workers exposed to cutting oils in the metalworking industry experience dermatitis from diverse causes. Some cutting oils containing TRIS NITRO may be involved in a fraction of these cases due to some chemical reaction which is not understood, but which may occur over a long period of time.

## Eye Irritation Study

In an eye irritation study conducted on rabbits using the technique of Draize, 0.1 ml of 50% aqueous TRIS NITRO was placed in one eye of each of six rabbits. Only two of the rabbits showed mild redness of the conjunctivae and only one animal had a score of two at 24 hours. The eyes of all rabbits were normal for the remainder of the observation period.

## Precautionary Labeling

### Caution!

- Avoid contact with eyes.
- Harmful if swallowed. Wash thoroughly with soap and water after handling and before eating or smoking.
- Harmful if inhaled. Avoid breathing spray mist.
- Remove contaminated clothing and wash before reuse.

## Statement of Practical Treatment

**If swallowed:** Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.

**If in eyes:** Flush with plenty of water. Call a physician.

**If on skin:** Wash thoroughly with soap and water.

**If inhaled:** Remove victim to fresh air. If not breathing, give artificial respiration and get medical attention.

## Handling and Storage

TRIS NITRO 50% solution will crystallize if cooled below approximately 13°C (55°F). It is therefore recommended that care be taken during transit, and provision be made for storage such that TRIS NITRO 50% solution is maintained at temperatures slightly higher than 13°C (55°F).

TRIS NITRO solution which has become frozen may be thawed and used without any loss of potency. This is most conveniently and safely accomplished by placing the frozen material in a heated storage area and agitating the contents. If this is impractical, frozen TRIS NITRO solution can be thawed through the use of a hot water-bath and frequent agitation of the drum to mix the contents. Care should be taken that the temperature of the polyethylene drum liner is not allowed to exceed 75°C (167°F).

TRIS NITRO decomposes in the presence of alkaline materials, so it should be protected from vapors of ammonia and amines during handling and storage to prevent deterioration.

ANGUS Chemical Company is the commercial manufacturer and worldwide marketer of nitroparaffins and their derivatives. The specialty chemical company is a jointly owned subsidiary of Alberta Natural Gas Company Ltd and Pacific Gas Transmission Company. ANGUS Chemical serves a broad range of industries, including pharmaceutical intermediates, automotive, metalworking, water treatment, petroleum production, coatings and inks.

### CORPORATE HEADQUARTERS

**ANGUS Chemical Company**  
2211 Sanders Road  
Northbrook, IL 60062  
(312) 498-6700  
Telex: 206-059 ANGUS NBRK  
Place Your Order Toll Free  
800-323-6210  
Illinois Call Collect  
(312)-498-6700

### SALES OFFICES

**Atlanta Area**  
5000 Snapfinger Woods Drive  
Building C  
Decatur, GA 30035  
(404) 987-4557

**Los Angeles Area**  
Union Bank Plaza  
15233 Ventura Boulevard  
Suite P8  
Sherman Oaks, CA 91403  
(818) 986-8388

### EUROPEAN HEADQUARTERS

ANGUS Chemie GmbH  
Kallenbug 2  
5000 Cologne 1, West Germany  
Phone: 221-131086  
Telex: 888-12 14 ANGK D

### Information Offices

ANGUS Chemie GmbH-France  
Le Bonaparte-Centre D'Affaires  
F-93153 Paris Nord (Le Blanc Mesnil)  
Paris, France  
Phone: 865-44-55  
Telex: 213-396

ANGUS Chemie GmbH-United Kingdom  
c/o Minerals Ltd  
Shepcote Lane-Tinsley  
Sheffield S9 1US, England  
Phone: 742-448-907  
Telex: 543-88 MINER G

The information, data, and opinions contained herein are believed to be correct. However, we do not warrant either expressly or by implication the accuracy thereof. In prescribing uses for these products, no attempt has been made to investigate or discuss any patent situations which may be involved. Each user should check his own formulations to determine their compliance with air pollution control regulations.

The information and data contained herein are believed to be correct. However, we do not warrant either expressly or by implication the accuracy thereof. In prescribing uses for these products, no attempt has been made to investigate or discuss any patent situations which may be involved.

**ANGUS**

TRIS NITRO is a Registered  
Trademark of ANGUS  
Chemical Company

HBX  
©1984 by ANGUS Chemical Company. All  
Rights Reserved. Printed in U.S.A.

Figure 1

### Stability of TRIS NITRO in Phosphate Buffer Solutions

