

PM 21 49596-2

ACCEPTED
with COMMENTS
in EPA's ... dated:

7 of 3

Front Panel

FEB 05 1991

Uncl. ... Fungicide, and ... amended, for the pesticide registered under EPA Reg. No.

49596-2

MOLD GUARD
Anti-Mold Coating

Active Ingredient:		
Copper 8-quinolinolate		0.2%
Inert Ingredients:		99.8%
	Total	100.0%

CAUTION

(18 pt)

Keep Out of Reach of Children


(12 pt)

See Back Panel for Additional Precautionary
Statements

Net Contents: 1 U.S. Gallon

EPA Reg. No. 49596-2

EPA Est. No. 49596-CA-1

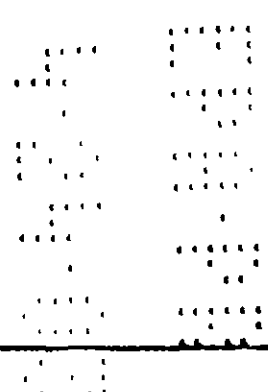

Back Label
(Left Column)

Mold Guard is a protective coating designed to protect against mold, rot and mildew stains on new or painted surfaces.

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION

Harmful if swallowed or inhaled. Avoid breathing vapors. Avoid contact with skin, eyes or clothing. In case of contact, immediately flush eyes or skin with plenty of water. Get medical attention if irritation persists.

Environmental Hazards

Keep out of lakes, ponds or streams. Do not contaminate water by cleaning of equipment or disposal of wastes.

Physical and Chemical Hazards

Do not store near heat or open flame.

Storage and Disposal


(12 pt)

Do not contaminate water, food or feed by storage or disposal. Wastes resulting from the product may be disposed of on site or at an approved waste disposal facility.

Container Disposal

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by State or Local authorities.

Continental Coatings, Inc.
10938 Beech Ave.
Fontana, CA 92335
USA

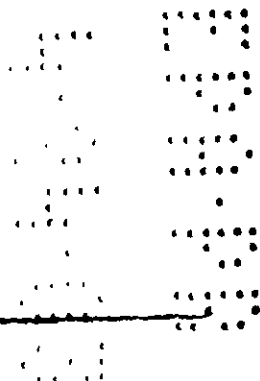

Back Panel
(Right Column)

Mold Guard Anti-Mold Coatings
Easy to Use Fast Drying

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Stir Thoroughly Before Use

Mold Guard may be used in controlling mold and mildew on walls, floors and ceilings of warehouses, bakeries, canneries, supermarkets and other food processing establishments. It may be used on wood, concrete, plaster and metal surfaces.

If used in a food processing area, cover all food and food machinery with plastic paint cloths before painting. It is recommended that the painting should be done in a shut-down condition.

Surfaces that are already supporting a heavy mildew (fungal) growth should first be cleaned with a stiff or wire brush or sand lightly. If this doesn't suffice, it may be necessary to use a high pressure hose or wipe down with Sodium hypochlorite. Allow to dry.

Check to make sure that the surface to be coated is free of oil, dirt, wax, grease and other stains. Surfaces previously painted or stained must be thoroughly cleaned to remove all blistered, peeled, cracked or loose material. On bare wood or other coarse substrates, apply sealer or primer before Mold Guard application.

Mold Guard may be applied by brush, roller or sprayer. Apply in a liberal uniform coat of Mold Guard over the entire surface to be painted. Pay special attention to cut ends and joined areas. For best results, apply in the shade (if outside) or indoors at 40° to 90° F. Maintain a wet edge to prevent lap marks when applying by brush or roller.

Approximate coverage: 300 square feet/gallon.

Drying Time: To Touch - 4 hours
 To Recoat - 24 hours
 Hard - 7 days

