

B-455

ACTIVE INGREDIENTS:

Methylene bis(thiocyanate)	10%
2-(Thiocyanomethylthio)benzothiazole	10%
INERT INGREDIENTS	80%

**KEEP OUT OF REACH OF CHILDREN
DANGER**

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive, causes irreversible eye damage and causes skin damage. Harmful or fatal if swallowed or absorbed through the skin. This product is a potential skin sensitizer. Workmen handling this product or treated material should wear impervious gloves, goggles or face shield, and protective clothing. All protective clothing, work shoes or boots, and equipment must be left at the work site at the end of the day. Eating, drinking, or smoking during use of this product is prohibited.

FIRST AID: *In case of skin contact, wash promptly and thoroughly with soap and water and finally with glycerin. If product gets in the eyes, flush immediately with copious amounts of clean, cool water for 15 to 30 minutes. Get medical attention immediately. If product is swallowed, call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.*

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

Manufactured by:
Hondo Chemical, Inc.

P. O. Box 9931
Bakersfield, CA 93389-1931

EPA REG. NO. 51032-1 EPA Est. No. _____

NET CONTENTS _____


DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

DRILLING FLUIDS: To inhibit bacterial and fungal degradation of the fluids or muds used in the drilling of wells, B-455 is incorporated in the drilling fluid at concentrations of 0.05 to 0.25% based on the total wet weight of the fluid.

PETROLEUM SECONDARY RECOVERY: B-455 is used to control sulfate-reducing bacteria, slime-forming bacteria and fungi in oil-field water, polymer, or micellar floods, water-disposal systems, and other oil-field water systems at dosage rates of 1.2 to 4.0 fl. oz. of B-455 per 1000 gal. of water treated. Additions should be made continuously or intermittently by means of a metering pump at the free water knockouts, before or after injection pumps and injection well headers. **Continuous Feed Method:** When system is noticeably fouled, add 1.2 to 4.0 fl. oz. B-455 per 1000 gal. of water continuously until desired degree of control is achieved. Then treat with 1.2 to 2.0 fl. oz. B-455 per 1000 gal. of water continuously, or as needed to maintain control. **Intermittent or Slug Method:** When system is noticeably fouled, or to maintain control, add 1.2 to 4.0 fl. oz. B-455 per 1000 gal. of water for 4 to 8 hr. per day and 1 to 4 times per week, or as needed to maintain control.

CRUDE AND REFINED OILS: B-455 is an oil-soluble preservative for the control of bacteria and fungi that cause the degradation of crude oil and refined fuel oils during storage. It should be added to the oil as it is being transferred from the shipping container to the storage tank at the rate of 0.6 to 6.0 fl. oz. B-455 per 1000 gal. of oil. Addition should be made batchwise where mixing occurs or continuously to the suction side of the transfer pump.

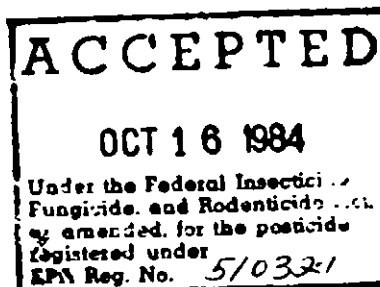

STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than five drums high. Drums should be opened in well-ventilated areas. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

B-455

ACTIVE INGREDIENTS:

Methylene bis(thiocyanate) 10%
2-(Thiocyanomethylthio)benzothiazole 10%

INERT INGREDIENTS 80%

KEEP OUT OF REACH OF CHILDREN DANGER

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive, causes irreversible eye damage and causes skin damage. Harmful or fatal if swallowed or absorbed through the skin. This product is a potential skin sensitizer. Workmen handling this product or treated material should wear impervious gloves, goggles or face shield, and protective clothing. All protective clothing, work shoes or boots, and equipment must be left at the work site at the end of the day. Eating, drinking, or smoking during use of this product is prohibited.

FIRST AID: *In case of skin contact*, wash promptly and thoroughly with soap and water and finally with glycerin. *If product gets in the eyes*, flush immediately with copious amounts of clean, cool water for 15 to 30 minutes. Get medical attention immediately. *If product is swallowed*, call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. *Do not induce vomiting or give anything by mouth to an unconscious person.*

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

Manufactured by:

EMERSON LABORATORIES, INC.

P. O. Box 9931

Bakersfield, CA 93389-1931

EPA REG. NO. 51032-1

EPA Est. No. _____

NET CONTENTS _____


DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling

DRILLING FLUIDS: To inhibit bacterial and fungal degradation of the fluids or muds used in the drilling of wells, B 455 is incorporated in the drilling fluid at concentrations of 0.05 to 0.25% based on the total wet weight of the fluid.

PETROLEUM SECONDARY RECOVERY: B 455 is used to control sulfate reducing bacteria, sulfide-forming bacteria and fungi in oil field water, polymer, or micellar floods, water disposal systems, and other oil field water systems at dosage rates of 1.2 to 4.0 fl. oz. of B 455 per 1000 gal. of water treated. Additions should be made continuously or intermittently by means of a metering pump at the free water knockouts, before or after injection pumps and injection well headers. **Continuous Feed Method:** When system is noticeably fouled, add 1.2 to 4.0 fl. oz. B 455 per 1000 gal. of water continuously until desired degree of control is achieved. Then treat with 1.2 to 2.0 fl. oz. B 455 per 1000 gal. of water continuously, or as needed to maintain control. **Intermittent or Slug Method:** When system is noticeably fouled, or to maintain control, add 1.2 to 4.0 fl. oz. B 455 per 1000 gal. of water for 4 to 8 hr. per day and 1 to 4 times per week, or as needed to maintain control.

CRUDE AND REFINED OILS: B 455 is an oil-soluble preservative for the control of bacteria and fungi that cause the degradation of crude oil and refined fuel oils during storage. It should be added to the oil as it is being transferred from the shipping container to the storage tank at the rate of 0.6 to 6.0 fl. oz. B 455 per 1000 gal. of oil. Addition should be made batchwise where mixing occurs or continuously to the suction side of the transfer pump.

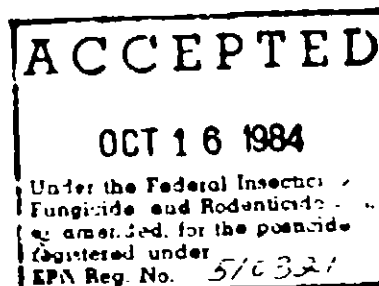

STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than five drums high. Drums should be opened in well ventilated areas. Leaking or damaged drums should be placed in overpark

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of empty pesticide, spray mixture, or rinseate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.