

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER

Highly corrosive. Causes skin and eye damage. May be fatal if swallowed. Do not get in eyes, on skin, or on clothing. Do not handle with bare hands. Wear goggles or face shield and use neoprene gloves and thoroughly clean utensils when handling. Irritating to nose and throat. Avoid breathing fumes. Remove and wash contaminated clothing to avoid fire.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not discharge into lakes, streams, ponds, or public waters unless in accordance with an NPDES Permit. For guidance contact the regional office of EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep product in tightly closed container when not in use. Don't drop, roll or send down. Keep upright. Always replace cover. Store in a cool, dry, well ventilated area away from heat or open flame. Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or residue is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Triple rinse container, then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.



PERMACIDE™ B

INDUSTRIAL MICROBICIDE

FOR USE IN THE GENERATION OF CHLORINE

To control microorganisms in oil field injection waters, refinery waste water, ent industrial recirculating water cooling towers, in once through fresh and sea water ind and in pulp and paper mill systems.

ACTIVE INGREDIENTS:

Sodium Chlorite
Sodium Chlorate

INERT INGREDIENTS:

**KEEP OUT OF REACH OF CHILDREN
DANGER**

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED Give large amounts of water. Call physician.
IF ON SKIN Flush skin with cold water for at least 15 minutes. Call physician.
IF IN EYES Flush with cold water for at least 15 minutes. Call physician.

See Side Panel for Additional Precautionary Statements

EMERGENCY HANDLING In case of contamination or decomposition, do not reseal container. If any, well ventilated area. Flood with large volumes of water. If fire occurs, extinguish fire by appropriate means. If the fire should be cooled by spraying with water.

ChemLink Petroleum, Inc.

1801 West Chester Pike
Newtown Square, PA 19073
Business Telephone: 918 245 2224
Emergency Telephone (24 hours): 800 424 9300
or 215 353 8300

EPA REGISTRATION NO.
51557-1

515
515

DIRECTIONS FOR USE It is a violation of Federal law to sell this product if the container is inconsistent with the label.


CHEMICAL HAZARDS This PermaFide (100) is a strong oxidizing agent. It reacts with organic materials, especially those containing sulfur, to form highly explosive compounds. It is also a strong irritant to the eyes, skin, and respiratory tract.

It is highly toxic to aquatic life and should not be discharged into streams, rivers, or other bodies of water. It is also highly toxic to birds and mammals. It should be stored in a cool, dry place, away from heat, sparks, and open flames. It should be kept in its original container, which is made of a material resistant to its action.

TREATMENT REQUIREMENTS In sewage treatment, PermaFide is used to oxidize organic matter. The amount of oxidant required depends on the severity of oxidation required. The required amount is determined by the type of material being treated. The oxidant is added to the sewage system and the water is aerated. The amount of oxidant required is generally 10 to 500 ppm of chlorine dioxide is required. A total of 10 to 15 ppm of chlorine dioxide is required to insure uniform distribution.

METHOD OF TREATMENT Chlorine dioxide is generated from PermaFide B and H and used with a Chlorine Dioxide Generator. The generator generates complete technical grade chlorine dioxide gas, which is piped to produce chlorine dioxide with the generator. Chlorine Dioxide Generator. The generator is used to produce chlorine dioxide gas, which is piped to the chlorine dioxide generator. The generator is used to produce chlorine dioxide gas, which is piped to the chlorine dioxide generator.

NOTICE: Seller warrants that the product conforms to its chemical description and is reasonably fit for the purpose stated on the label when used in accordance with directions under normal conditions of use, but neither this warranty nor any other express or implied, extends to its use, storage or handling of this product in a manner other than as directed by label instructions, or under abnormal conditions, or under conditions not reasonably foreseeable to seller, and buyer assumes the risk of any such use.

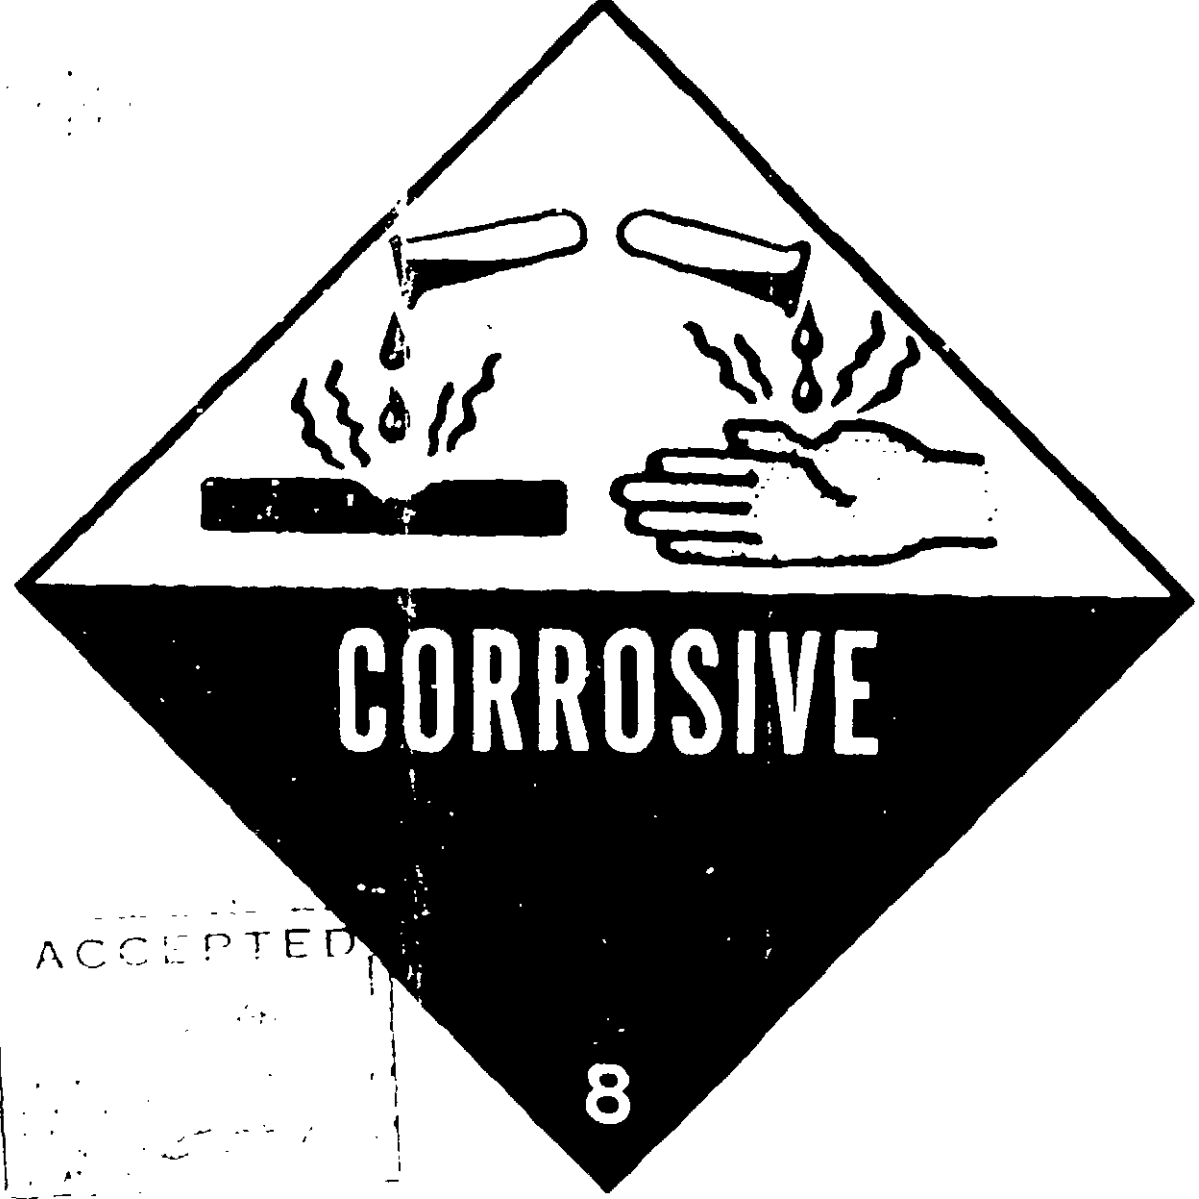

U.S. DEPARTMENT OF COMMERCE
ON 1760

Net Weights 55 gallon 596 lbs