



# TWP

## TOTAL\* WOOD PRESERVATIVE

\*Total Wood Preservative (TWP) provides a broad spectrum of wood protection from mildew and fungus attack, aging and weathering. TWP® is water repellent and aids in color retention.

## PRESERVES NATURAL WOOD COLOR

[Color Number and Description, e.g. 100 Clear]  
 [ONE GALLON (3.785 LITERS)] [FIVE GALLON (18.925 LITERS)]

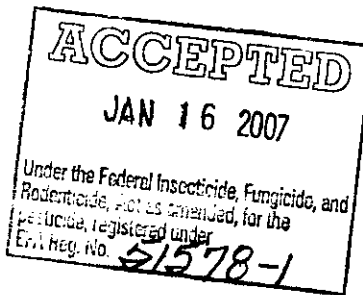

Use Total Wood Preservative for these applications:

- ROUGH SAWN CEDAR
- WOOD SIDING
- PORCH DECKING
- FENCES
- WOOD SHINGLES
- SHAKES
- SHUTTERS
- FACIA

KEEP OUT REACH OF CHILDREN <b>CAUTION</b>	ACTIVE INGREDIENTS	
	3-Iodo-2-Propynyl Butyl Carbamate.....	0.58%
COMBUSTIBLE LIQUID AND VAPOR See Back Panel For Additional Precautionary Statements	INERT INGREDIENTS.....	99.42%
	TOTAL.....	100.00%
	Contains Petroleum Distillates	

This product contains a chemical known to the State of California to cause cancer.



H-2  
F-2  
R-O  
PP-G

EPA Reg. No. 51578-1  
 EPA Est. No. 51578-MO-1

51578-1  
1/16/2007  
Page 1 of 2

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**CAUTION.** Avoid contact with skin or clothing. Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet.

FIRST AID	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
<b>IF IN EYES:</b>	<ul style="list-style-type: none"> <li>• Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li> <li>• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li> <li>• Call a poison control center or doctor for treatment advice.</li> </ul>
<b>IF SWALLOWED:</b>	<ul style="list-style-type: none"> <li>• Call poison control center or doctor immediately for treatment advice.</li> <li>• Have person sip a glass of water if able to swallow.</li> <li>• Do not induce vomiting unless told to do so by the poison control center or doctor.</li> <li>• Do not give anything by mouth to an unconscious person.</li> </ul>
<b>IF ON SKIN:</b>	<ul style="list-style-type: none"> <li>• Take off contaminated clothing.</li> <li>• Rinse skin immediately with plenty of water for 15-20 minutes.</li> <li>• Call a poison control center or doctor for treatment advice.</li> </ul>
<b>IF INHALED:</b>	<ul style="list-style-type: none"> <li>• Move person to fresh air.</li> <li>• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.</li> <li>• Call a poison control center or doctor for further treatment advice.</li> </ul>

In case of emergency call toll free: 1-800-424-9300

**NOTE TO PHYSICIAN:** May pose an aspiration pneumonia hazard. Contains petroleum distillates.

**PPE FOR COMMERCIAL USERS**

Applicators and other handlers must wear:

- long-sleeved shirt and long pants
- chemical resistant gloves (such as barrier laminate, nitrile rubber, neoprene rubber and viton)
- shoes plus socks

Follow manufacturers' instructions for cleaning/maintaining PPE. If no such instructions exist for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

**USER SAFETY RECOMMENDATIONS**

**Residential Users should:**

- remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.

**Commercial Users should:**

- wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet.
- remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.
- remove personnel protective equipment immediately after handling this product. Wash the outside of gloves before removing. As soon as possible wash thoroughly.

**ENVIRONMENTAL HAZARDS**

This product is toxic to fish. Do not apply directly to water, or areas where surface water is present or to ntertidal areas below the mean high water mark. Do not contaminate water when cleaning equipment or disposing of equipment washwaters.

**PHYSICAL AND CHEMICAL HAZARDS**

**COMBUSTIBLE!** Do not use, store, pour or spill near heat, sparks or open flame. Keep away from heat. In case of fire use water spray, foam carbon dioxide or dry chemical.

**STORAGE AND DISPOSAL**

Do not contaminate water, food, or feed by storage and disposal.

**STORAGE:** Do not expose this product to excessive heat or cold. Store in sealed metal containers. Close container after each use.

**DISPOSAL: Residential Users-** Do not reuse container. Securely wrap original container in several layers of newspaper and discard in trash. **Commercial Users-** Pesticide Disposal: Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility. Container Disposal: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. **BEFORE USING THIS PRODUCT** it is essential that you consult the Material Safety Data Sheet (MSDS) describing the product as well as known possible hazards. If you do not have one, ask your sales representative to provide one for you.

**GENERAL PRECAUTIONS AND RESTRICTIONS**

**Residential Users:** Do not apply this product in a way that will contact any person or pet.

**Commercial Users:** Do not apply this product in a way that will contact workers or other persons.

This product is for exterior use only and is not intended for use in direct contact with soil. TWP is not intended for the control of termites or other wood destroying insects. TWP is not re-tintable nor intended for below ground use. Do not apply below 50 °F. Avoid foliage during application.

**DO NOT THIN TWP.**

**IMPORTANT! RAGS, STEEL WOOL OR WASTE SOAKED WITH THIS PRODUCT MAY SPONTANEOUSLY CATCH FIRE IF IMPROPERLY STORED OR DISCARDED. IMMEDIATELY AFTER USE, PLACE RAGS, STEEL WOOL OR WASTE IN A SEALED WATER-FILLED METAL CONTAINER.**

**GENERAL INFORMATION**

TWP protects wood substances from premature loss of color, water rot, surface mildew, and water absorption. The product contains ultraviolet inhibitors to prevent natural graying of wood.

TWP may be intermixed with other TWP colors. TWP is available in 100 Clear, 101 Cedartone, 102 Redwood, 103 Dark Oak, 104 Black Walnut, 105 Cape Cod Gray, and 106 Prairie Gray. TWP 100 Clear is intended for exterior use only and does not include ultraviolet protection from weathering. Due to variation of base wood color, finish color may vary. **CHECK COLOR BY APPLYING SAMPLE OF PRODUCT TO DETERMINE DESIRED EFFECT.** Because horizontal surfaces are subject to harsher conditions (foot traffic, standing water, deck furniture, spills, etc.) than vertical surface, we cannot guarantee color retention. Apply color maintenance coats as needed.

TWP is designed for application on clean wood surfaces. Applying this product over a sealed surface will result in a glossy film. TWP will function best if old finish is removed.

**APPLICATION INSTRUCTIONS**

**New Wood:** Rough sawn surfaces must complete 4 cycles of water soaking and thorough drying before finish application. Use Gemini's Wood Prep as per label instructions. Allow a minimum of 48 hours after last exposure to moisture for substrate to thoroughly dry.

**Pressure-Treated Wood:** Use Gemini's Wood Prep as per label instructions. Allow a minimum of 7 days after last exposure to moisture for substrate to thoroughly dry. Wet shipped pressure treated wood should be allowed 12 month natural weathering before finish coat application.

**Old Wood:** Unprotected old wood is typically various shades of gray to black. This is due to mildew and ultraviolet light attack on the wood surface. To treat this type of surface, apply Gemini's Wood Brightener Plus or Gemini's Wood Brightener for Cedar and Redwood per label instructions. After use, pressure wash as recommended and allow to dry for 48 hours.

**Previously Stained Wood:** Apply Gemini's Injectable Safe Strip per label instructions to remove oil-based and water-based stains and sealers.

**Spread Rate:** Apply 200 - 400 sq. ft./gal. Rate will vary depending upon wood porosity. Two uniform coats achieve the best results. Follow first saturation coat with moderate to thin second coat to prevent excessive surface build. TWP must not be allowed to puddle on surface as excess film build will appear shiny and cause failure. A second coat, if desired, must be applied immediately after the first coat.

**Method of Application:** Use brush, roller or spray. Use Mineral Spirits for equipment cleanup. **DO NOT THIN TWP.**

**MIX THOROUGHLY BEFORE USING AND OCCASIONALLY DURING USE.**

**MAXIMUM V.O.C. 550 grams/liter or less**

**Customer Satisfaction Guarantee:** If not satisfied with this product when applied according to label directions, additional product will be provided or your purchase price will be refunded. Amteco Inc. accepts no responsibility in regards to any labor claims..

Contains/CAS#: Mineral Spirits/8052-41-3, Petroleum Hydrocarbons/6472-47-8, Ethyl Benzene/100-41-4

**Manufactured by: AMTECO, INC., PO Box 9, Pacific, MO 63069 1-800-969-4811  
Emergency (Chemtrec) 800-424-9300  
TWP is a registered trademark of Amteco, Inc.**

222