

Front panel

HIGH PERFORMANCE MARINE FINISHES

**RAPPAHANNOCK COATINGS, INC.**

**ANTI-FOULING BOAT BOTTOM COPPER PAINT No. 1**

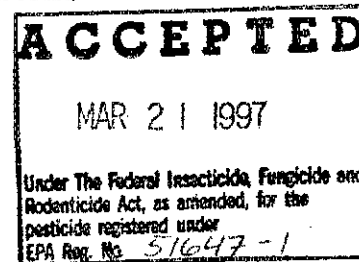
<b>ACTIVE INGREDIENTS (All Colors)</b>	
CUPROUS OXIDE.....	27.76%
(Copper as Metallic 24.6%)	
INERT INGREDIENTS.....	72.24%
TOTAL.....	100.00%

THIS PRODUCT CONTAINS PETROLEUM DISTILLATES

KEEP OUT OF REACH OF CHILDREN

**WARNING**COMBUSTIBLE VAPOR HARMFUL

HARMFUL OR FATAL IF SWALLOWED OR INHALED  
IRRITATES EYES, SKIN, AND RESPIRATORY TRACT

BEFORE USING, CAREFULLY READ CAUTIONS ELSEWHERE ON LABEL**Statement of Practical Treatment (First Aid)**

If Swallowed	Drink promptly a large quantity of milk, egg whites, gelatin solution or these are not available drink large quantities of water. Avoid alcohol. Get Medical Attention.
If Inhaled	Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get Medical Attention.
If On Skin	Wash with plenty of soap and water. If irritation persists, Get Medical Attention.
If In Eyes	Flush with plenty of water for at least 15 minutes. Get Medical Attention.

**ACCEPTED**

MAR 21 1997

Under The Federal Insecticide, Fungicide and  
Rodenticide Act, as amended, for the  
pesticide registered under  
EPA Reg. No. 51647-1

2 7 3  
Back Panel

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

**WARNING**

**IRRITATES EYES, SKIN, AND RESPIRATORY TRACT.** Harmful if absorbed through skin, eyes, or clothing. Wear protective clothing, such as gloves, long sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. **Do not take internally.** Do not breathe vapor or spray mist while spraying paint or sanding boat surface. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and The National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

**ENVIRONMENTAL HAZARDS**

This Material is Toxic to Fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

**PHYSICAL or CHEMICAL HAZARDS**

Do Not Use or Store Near Heat or Open Flame

**STORAGE AND DISPOSAL**

Do not contaminate water, food, feed by storage or disposal. Open dumping is prohibited.

**PESTICIDE DISPOSAL**

Paint that cannot be used according to label instructions must be disposed of according to federal, state, or local procedures under the Resources Conservation and Recovery Act.

**CONTAINER DISPOSAL**

Dispose of container by triple rinse and recycling or puncturing and disposing in a sanitary landfill or by other approved State and local procedures. If burned stay out of smoke.

**DIRECTIONS FOR USE**

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS  
PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

**DESCRIPTION & APPLICATION**

This is a cuprous oxide pigmented coating, formulated especially to prevent the attachment of both plant and animal fouling on vessels immersed in both sea and "brackish" water.

## Back Panel (cont.)

When used over steel or aluminum surfaces, a primer coating is required to prevent accelerated corrosion. This coating requires no primer when used directly over fiberglass or wood. For optimum performance, two (2) coats are recommended. The theoretical coverage of this product is at least 400 square feet per gallon when applied to the recommended dry film thickness.

To prepare the surface for coating, remove all old coating and fouling residue by either washing with high pressure water, scraping, or by disc sanding. Be sure to use the proper protective equipment to prevent inhalation or ingestion of the paint dust generated.

A clean, dry surface, free of scale, corrosion, dirt, grease, oil, marine fouling, or other foreign matter will provide the optimum performance of this coating when used for either complete coating or touch-up. Inadequate surface preparation will result in unsatisfactory performance. Be sure to remove all dust, debris, and other surface contaminants that are generated by the cleaning process prior to painting.

Mix the coating with either a high speed mixer or a paint shaker for a minimum of five (5) minutes to insure complete pigment reincorporation. Thin in the event that the coating is too thick to apply easily. Thin with mineral spirits or VM & P Naphtha.

Apply by either brush, roller, or spray. Be sure to follow mixing instructions and apply the correct film thickness. Allow a minimum of four (4) hour between coats and a minimum of two (2) hours before undocking vessel.

**Contains solvents which can cause permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling the contents can be harmful or fatal.**

NET CONTENTS - \_\_\_\_\_

Manufactured By:

**Rappahannock  
Coatings, Inc.**

Elizabeth City, NC 27909  
Establishment No. 51647-NC-01

Lodi, NJ 07644  
Establishment No. 32259-NJ-1

EPA Registration No. 51647-1

