

1 gal  
Per 31  
5/26/77

JAN 23 1985

51647-7

QUALITY PRODUCTS  
FOR THE COMMERCIAL WATERMAN

# RAPPAHANNOCK

Copper Paint  
No. 10

ACTIVE INGREDIENTS	
CUPROUS OXIDE	4.16%
(Copper as Metallic)	4.57%
INERT INGREDIENTS	94.84%
TOTAL	100.00%

4.90 %  
9.34 %  
100.10 %

"This Product Contains petroleum Distillates"

Keep Out of Reach of Children

• WARNING •

STATEMENT OF PRACTICAL TREATMENT

**IF SWALLOWED:** Drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid Alcohol. Get Medical Attention.

**IF INHALED:** Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth to mouth. Get Medical Attention.

**IF ON SKIN:** Wash with plenty of soap and water. Get Medical Attention.

**IF IN EYES:** Flush with plenty of water. Get Medical Attention.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

MFD BY Rappahannock Copper Paint Co., Inc  
Virginia Beach, Virginia

Establishment No

EPA Registration No

NET CONTENTS - ONE GALLON

DIRECTIONS FOR USE  
FOR COMMERCIAL USE ONLY

This is a cuprous oxide pigmented coating, formulated especially to prevent the attachment of both plant and animal fouling on vessels immersed in both seawater and "brackish" water.

When used over steel or aluminum surfaces, a primer coating is required to prevent accelerated corrosion. This coating requires no primer when used directly over fiberglass or wood. For optimum performance, two (2) coats are recommended. The theoretical coverage of this product is at least 400 square feet per gallon, when applied to the recommended dry film thickness.

To prepare the surface for coating, remove all old coating and fouling residue by either washing with high pressure water, scraping or by disc sanding. Be sure to use the proper protective equipment to prevent inhalation or ingestion of the paint dust generated.

A clean dry surface, free of scale, corrosion, dirt, grease, oil, marine fouling, or other foreign matter will provide the optimum performance of the coating, when used for either complete coating or for touch up. Inadequate surface preparation will result in unsatisfactory performance. Be sure to remove all dust, debris and other surface contaminations that are generated by the cleaning process, prior to painting.

Mix the coating with either a high speed mixer, or a paint shaker for a minimum of five (5) minutes to insure complete pigment reincorporation. Thin in the event that the coating is too thick to apply easily. Thin with mineral spirits or kerosene. Clean up with mineral spirits or kerosene.

Apply by either brush, roller, or spray. Be sure to follow mixing instructions and apply the correct thickness. Allow a minimum of four (4) hours between coats and a minimum of two (2) hours before undocking vessel.

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS  
(A DOMESTIC ANIMALS)

• WARNING •

**CAUSES EYE IRRITATION:** Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist while spraying paint or sanding boat surface. Wear a mask or respirator readily approved by The Mining, Enclaves and Safety Administration and The National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS

This Material is Toxic to Fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL or CHEMICAL HAZARDS

Do Not Use or Store Near An Open Flame.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING


STORAGE AND DISPOSAL

**STORAGE:** Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Store in a cool, dry area away from heat or open flame.

**DISPOSAL:** Pesticide spray mixture or rinse water that cannot be used according to label instructions must be disposed of according to applicable Federal, state or local procedures.

Container - Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a nearby landfill, or by other approved state and local procedures.

Rev. 2  
Oct. 84

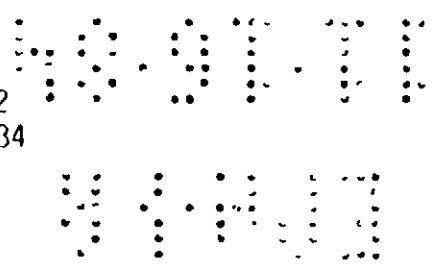

**BEST AVAILABLE COPY**