

U.S. ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (WH-567) WASHINGTON, D.C. 20460  NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION  (Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)	EPA REGISTRATION NO. 52598-1	DATE OF ISSUANCE AUG 9 1985
	TERM OF ISSUANCE Conditional	
	NAME OF PESTICIDE PRODUCT Saxon Signature/Best Quality Oil Solid Color Stain and Preservative	

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Dreeblan Paint Co. 3729 W. 49th Street Chicago, IL 60632	$\begin{array}{r} 161 \\ \hline 18 \\ \hline \end{array}$	$\begin{array}{r} 153611 \\ \hline 1 \\ \hline \end{array}$
--	---	---

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an endorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
2. Add the phrase "EPA Registration No. 52598-1" to your label before you release the product for shipment.
3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Henry M. Jacoby  
 Product Manager (21)  
 Fungicide-Herbicide Branch  
 Registration Division (TS-767)

Enclosure

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL	DATE
<i>[Signature]</i>	8/9/85

ality

# Color

# Preservative

can possibly offer you. It's made  
advances in stain technology and  
help preserve wood. One coat of  
the wood and won't chip, peel,  
formulated by my chemists to  
weather for years.

protection, that also enhances  
of exterior wood, I highly  
personal endorsement is your

Paint & Home Care Centers



EPA Reg. No. 52598-  
EPA Est. No. 52598-II-1

ACCEPTED  
with COMMENTS  
by EPA Letter Dated:

AUG 9 1985

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act  
as amended, for the pesticide  
registered under EPA Reg. No.  
52598-1

KEEP OUT OF REACH  
OF CHILDREN

**WARNING!**  
**COMBUSTIBLE**

Contains Petroleum Distillates  
See other precautions on back panel

**BEST AVAILABLE COPY**

### Quick Facts About This Stain

**Finish/Type**  
Flat exterior finish/Opaque

**Where to Use**  
On new or previously stained  
or painted wood, rough or  
smooth siding, fences, shutters,  
garages. Not recommended on  
horizontal surfaces, such as  
floors, decks, or outdoor  
furniture.

**Coverage**  
One gallon covers approx-  
imately 200 square feet,  
depending on the porosity  
of the wood.

**Drying Time**  
Dries in one hour to touch;  
24 hours for recoating.

**Clean-Up/Thinning**  
Clean-up with mineral spirits  
paint thinner.

**NOTICE**  
Colors shown are approxi-  
mate at best and will vary accord-  
ing to the type of wood and spe-  
cial job. For more accurate tones,  
samples should be made on  
scraps or on the actual job it-  
self in an inconspicuous spot be-  
fore starting. Two coats will result  
in approximately twice as dark  
a tone.

<b>ACTIVE INGREDIENT:</b>	
J-Iodo-2-Propynyl Butyl Carbanate	... 0.5%
<b>INERT INGREDIENTS</b>	..... 99.5%
	<b>100.0%</b>

**BEST AVAILABLE COPY**

**SAXON'S  
UNCONDITIONAL PAINT  
GUARANTEE**

If you are not satisfied with any paint purchased at Saxon, just bring in your remaining paint and sales receipt and we will cheerfully refund your money or replace your purchase with comparably priced paint.

For any reason.

For any reason at all.

Labor or cost of application not included.



Manufactured in our own factory.  
6,1964 Saxon Paint & Home Care Center  
Chicago, Illinois 60647

10745

*Saxon Signatures*

---

# Oil Soap Stain Remover

---

*This is the most durable  
in my factory with  
materials to repel  
this stain penetrates  
blister or crack. And  
withstand our severe*

*For the best in durability  
the natural beauty  
recommend this stain  
guarantee of total satisfaction*

---

*Alma Saks* Pres.

---

One Gallon

---

ing. Remove contaminated clothing and wash before reuse.

STATEMENT OF PRACTICAL TREATMENT. IF IN EYES: Flush with plenty of water. Get medical attention. IF SWALLOWED: Do not induce vomiting. Promptly drink a large quantity of milk, egg whites, or gelatin solution; if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention immediately. IF ON SKIN: Wash with plenty of soap and water. IF INHALED: Remove victim to fresh air and administer artificial respiration as needed.

ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply directly to any body of water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

PHYSICAL AND CHEMICAL HAZARDS: COMBUSTIBLE. Do not use, pour or spill near heat or open flame. In case of fire, use water, spray, foam, carbon dioxide or dry chemical.

#### SAXON SIGNATURE OIL SOLID COLOR WOOD STAIN & PRESERVATIVE

Blocks Out Grain, Allows Texture to Show/Weatherproofs Vertical Siding and Shingles/Does not Chip, Peel, or Crack When Applied to Bare Wood or Over Sound Surfaces/Has Deep Penetration, Unlike Ordinary House Paint/Not Recommended for Floors, Decks, or Outside Furniture, or below Grade Surfaces.

Saxon Signature Oil Solid Color Stain & Preservative contains 3-Iodo-2 Propynyl Butyl Carbamate which controls mildew, sapstain and wood rot.

#### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This product is for exterior use only and is recommended for shingles (not asbestos), shakes, clapboards, smooth or rough-cut wood siding, railings, structural support timbers, flat beds, cold frames and greenhouses. The product is not recommended for wood used for ground, food, feed or potable water contact. Cover desirable plants and shrubs to avoid possible injury. This product can be used where dairy and farm animals may come in contact with the treated wood.

#### SURFACE PREPARATION

Clean surface thoroughly, until free of soot, grease, loose sealing paint and wet away mildew if present (looks like dirt spots or streaks) with 1/2 water, 1/2 household bleach solution; allow solution to dry on the surface without rinsing off. Before applying stain, surface should always be completely dry. Patch holes and joints with matching colored caulk.

**APPLYING STAIN**

Stir thoroughly before using. Apply when temperature is over 50 . Avoid staining in hot sun; it is best to follow the shade around the house. Do not stain when rain is imminent. Before starting, mix together as many gallons as needed to do one side. Stain is best applied with 4 inch bristle stain brush, or flat pads. If rollers are used, simultaneous brushing out is required. Apply in direction of grain. For vertical siding, paint 3 or 4 boards at a time from top to bottom, keeping a wet edge. For better protection, vertical surfaces may receive 2 coats. On horizontal siding, apply a uniform coat to 3 or 4 boards all the way across to an edge to avoid lap marks.

**STORAGE AND DISPOSAL**

**STORAGE:** Do not expose this product to excessive heat.

**DISPOSAL:**

**Household Users:** Do not reuse container. Securely wrap original container in several layers of newspaper and discard in trash.

**Commercial Users: Pesticide/Product Disposal-**Do not contaminate water, food or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

**Container Disposal -** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

U.S. ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (WH-567) WASHINGTON, D.C. 20460  NOTICE OF PESTICIDE: <input checked="" type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION  (Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)	EPA REGISTRATION NO. 52598-1	DATE OF ISSUANCE AUG 9 1985
	TERM OF ISSUANCE Conditional	
	NAME OF PESTICIDE PRODUCT Saxon Signature/Best Quality Oil Solid Color Stain and Preservative	

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Dreeblan Paint Co.  
 3729 W. 49th Street  
 Chicago, IL 60632

161      153611  
 18      1

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an endorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.
2. Add the phrase "EPA Registration No. 52598-1" to your label before you release the product for shipment.
3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Henry M. Jacoby  
 Product Manager (21)  
 Fungicide-Herbicide Branch  
 Registration Division (TS-767)

Enclosure

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL *[Signature]* DATE 8/9/85

*Saxon Signature/Best Quality*


# Oil Solid Color Stain & Preservative

*This is the most durable stain I can possibly offer you. It's made in my factory with the latest advances in stain technology and materials to repel moisture and help preserve wood. One coat of this stain penetrates deep into the wood and won't chip, peel, blister or crack. And it's specially formulated by my chemists to withstand our severe Midwest weather for years.*

*For the best in durability and protection, that also enhances the natural beauty and texture of exterior wood, I highly recommend this stain. My personal endorsement is your guarantee of total satisfaction.*

*Alan Saks* President, Saxon Paint & Home Care Centers

One Gallon

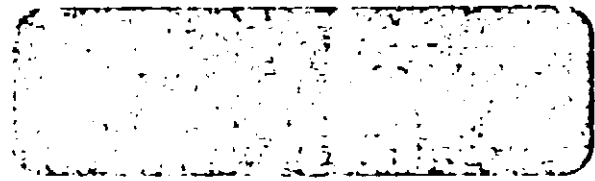

EPA Reg. No. 52598-  
EPA Est. No. 52598-11-1

ACTIVE INGREDIENT:  
3-Iodo-2-Propynyl  
INERT INGREDIENTS..

ACCEPTED  
with COM  
EPA Let

AUG  
Under the F  
Fungicide, and  
as amended,  
registered und  
56

KEEP OUT  
OF CH  
WARR  
COMBU  
Contains Petrol  
See other precauti

**BEST AVAILABLE**



NOT AVAILABLE OUT


**SAXON'S  
UNCONDITIONAL PAINT  
GUARANTEE**

If you are not satisfied with any paint purchased at Saxon, just bring in your remaining paint and sales receipt and we will cheerfully refund your money or replace your purchase with comparably priced paint.

For any reason.

For any reason at all.

Labor or cost of application not included.



Manufactured in our own factory.  
©1984 Saxon Paint & Home Care Center  
Chicago, Illinois 60647

20/MS

Right Panel

**PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS:WARNING.**Contains Petroleum Distillates.Use only with adequate ventilation.Avoid prolonged breathing of vapor or spray mist.Causes substantial but temporary eye injury. Do not get in eyes or on clothing.Wear goggles.Harmful if swallowed.Wash thoroughly with soap and water after handling.Remove contaminated clothing and wash before reuse.

**STATEMENT OF PRACTICAL TREATMENT.**IF IN EYES:Flush with plenty of water. Get medical attention.IF SWALLOWED:Do not induce vomiting. Promptly drink a large quantity of milk,egg whites,or gelatin solution; if these are not available,drink large quantities of water. Avoid alcohol.Get medical attention immediately.IF ON SKIN:Wash with plenty of soap and water. IF INHALED:Remove victim to fresh air and administer artificial respiration as needed.

**ENVIRONMENTAL HAZARDS:**This product is toxic to fish.Do not apply directly to any body of water.Do not contaminate water by cleaning of equipment or disposal of wastes.Apply this product only as specified on this label.

**PHYSICAL AND CHEMICAL HAZARDS:COMBUSTIBLE.**Do not use,pour or spill near heat or open flame.In case of fire,use water,spray, foam,carbon dioxide or dry chemical.

**SAXON SIGNATURE OIL SOLID COLOR WOOD STAIN & PRESERVATIVE**

Blocks Out Grain, Allows Texture to Show/Weatherproofs Vertical Siding and Shingles/Does not Chip,Peel,or Crack When Applied to Bare Wood or Over Sound Surfaces/Has Deep Penetration, Unlike Ordinary House Paint/Not Recommended for Floors,Decks, or Outside Furniture,or below Grade Surfaces.

Saxon Signature Oil Solid Color Stain & Preservative contains 3-Iodo-2 Propynyl Butyl Carbanate which controls mildew, sapstain and wood rot.

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This product is for exterior use only and is recommended for shingles (not asbestos),shakes, clapboards, smooth or rough-cut wood siding, railings, structural support timbers, flat beds, cold frames and greenhouses. The product is not recommended for wood used for ground, food, feed or potable water contact. Cover desirable plants and shrubs to avoid possible injury. This product can be used where dairy and farm animals may come in contact with the treated wood.

**SURFACE PREPARATION**

Clear surface thoroughly, until free of soot,grease,loose sealing paint. Scrub away mildew if present (looks like dirt spots or streaks) with 1/2 water,1/2 household bleach solution;allow solution to dry on the surface without rinsing off. Before applying stain, surface should always be completely dry. Patch cracks, holes and joints with matching colored caulk.

#### APPLYING STAIN

Stir thoroughly before using. Apply when temperature is over 50 . Avoid staining in hot sun; it is best to follow the shade around the house. Do not stain when rain is imminent. Before starting, mix together as many gallons as needed to do one side. Stain is best applied with 4 inch bristle stain brush, or flat pads. If rollers are used, simultaneous brushing out is required. Apply in direction of grain. For vertical siding, paint 3 or 4 boards at a time from top to bottom, keeping a wet edge. For better protection, vertical surfaces may receive 2 coats. On horizontal siding, apply a uniform coat to 3 or 4 boards all the way across to an edge to avoid lap marks.

#### STORAGE AND DISPOSAL

STORAGE: Do not expose this product to excessive heat.

#### DISPOSAL:

Household Users: Do not reuse container. Securely wrap original container in several layers of newspaper and discard in trash.

Commercial Users: Pesticide/Product Disposal-Do not contaminate water, food or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

Container Disposal - Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.