

PM32

53257-6

Y9

Please read instructions on reverse before completing form.

Form Approved. OMB No. 2070-0060. Approval expires 05-31-98



United States
Environmental Protection Agency
Washington, DC 20460

<input type="checkbox"/> Registration	OPP Identifier Number 253285
<input checked="" type="checkbox"/> Amendment	
<input type="checkbox"/> Other	

Application for Pesticide - Section I

1. Company/Product Number 53257-6	2. EPA Product Manager	3. Proposed Classification <input type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Sodium Hypochlorite Solution 10, 5% by weight	PM#	
5. Name and Address of Applicant (Include ZIP Code) Clearwater Chemical Corp. 1575 Sunshine Drive P. O. Box 6865 Clearwater, FL 34618-6865 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(ii), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input checked="" type="checkbox"/> Amendment - Explain below.	<input checked="" type="checkbox"/> Final printed labels in response to Agency letter dated PR Notice 95-1
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

Change in effluent discharge labeling statements.

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		<input type="checkbox"/> Metal	Bulk storage tanks of high density cross-linked polyolefin
* Certification must be submitted	If "Yes" Unit Packaging wgt. No. per container	If "Yes" Package wgt. No. per container		<input type="checkbox"/> Plastic	
3. Location of Net Contents Information <input type="checkbox"/> Label <input checked="" type="checkbox"/> Container		4. Size(s) Retail Container 500 gal. to 4000 gal.		5. Location of Label Directions <input checked="" type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed to Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled			<input checked="" type="checkbox"/> Other Vinyl adhesive label		

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)					
Name Keith A. Walder		Title Vice President		Telephone No. (Include Area Code) (813) 461-5116	
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.					6. Date Application Received (Stamped)
2. Signature 			3. Title Vice-President		
4. Typed Name Keith A. Walder			5. Date 8/29/95		

SODIUM HYPOCHLORITE SOLUTION 10.5% by weight

ACTIVE INGREDIENT:
SODIUM HYPOCHLORITE 10.5%
INERT INGREDIENTS 89.5%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)

IF CONTACT WITH EYES OCCURS, flush with water for at least 15 minutes. Get prompt medical attention.
IF CONTACT WITH SKIN OCCURS, wash with plenty of soap and water.
IF SWALLOWED, drink large amounts of water. DO NOT induce vomiting. Call a physician or poison control center immediately.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive, may cause severe skin and eye irritation or chemical burns to broken or skin. Causes eye damage. Wear safety glasses or goggles and rubber gloves when handling this product. Wash after handling. Avoid breathing vapors. Vacate poorly ventilated areas as soon as possible. Do not return until strong odors have dissipated.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS:
STRONG OXIDIZING AGENT: Mix only with water according to label directions. Mixing this product with chemicals (e.g. ammonia, acids, detergents, etc.) or organic matter (e.g. urine, feces, etc.) will release chlorine gas which is irritating to eyes, lungs and mucous membranes.

V3-R

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

Formulators using this product are responsible for obtaining EPA registration of their formulated products.
NOTE: This product degrades with age. Use a chlorine test kit and increase dosage as necessary to obtain the required level of available chlorine.

STORAGE AND DISPOSAL: Store this product in a cool, dry area, away from direct sunlight and heat to avoid deterioration. In case of spill, flood areas with large quantities of water. Product or residue which cannot be used should be diluted with water before disposal in a sanitary sewer. Return empty container to dealer or distributor for deposit refund. Do not reuse container. If not returned for deposit refund, place in trash for collection. Do not contaminate food or feed by storage, disposal, or cleaning of equipment.

SWIMMING POOL WATER DISINFECTION: For a new pool or for spring start-up, superchlorinate with 5 1/2 to 10 7/8 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Adjust and maintain pool water pH to between 7.2 to 7.6. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 1 1/4 oz. of this product for each 10,000 gallons of water to yield an available chlorine residual between 0.6 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to 1.5 ppm available chlorine. Test the pH, available chlorine and alkalinity of the water frequently, with appropriate test kits. Frequency of water treatment will depend upon temperature and number of swimmers.

Every 7 days, or as necessary, superchlorinate the pool with 5 1/2 to 10 7/8 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Do not reenter pool until the chlorine residual is between 1.0 to 3.0 ppm.

At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

SPAS, HOT-TUBS: Apply 5 oz. of product per 1000 gallons of water to obtain a free available chlorine concentration of 5 ppm, as determined by a suitable chlorine test kit. Adjust and maintain pool water pH to between 7.2 and 7.6. Some oils, lotions, fragrances, cleaners, etc. may cause foaming or cloudy water as well as reduce the efficiency of the product.

To maintain the water, apply 5 oz. of product per 1000 gallons of water over the surface to maintain a chlorine concentration of 5 ppm.

After each use, shock treat with 8 oz. of this product per 500 gallons of water to control odor and algae. During extended periods of disuse, add 4 oz. of product daily per 1000 gallons of water to maintain a 3 ppm chlorine concentration.

Manufactured by:

CLEARWATER CHEMICAL CORPORATION

1575 Sunshine Drive, Clearwater, Florida 34625

EPA REG. NO. 53257-6
Hypochlorite Solution UN 1791

EPA EST. NO. 53257-FL-001
Net Contents: 2 1/2 Gals.

1.13

3/7

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER: Corrosive, may cause severe skin and eye irritation or chemical burns to broken skin. Causes eye damage. Wear safety glasses or goggles and rubber gloves when handling this product. Wash after handling. Avoid breathing vapors. Vacate poorly ventilated areas as soon as possible. Do not return until strong odors have dissipated.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS:

STRONG OXIDIZING AGENT: Mix only with water according to label directions. Mixing this product with chemicals (e.g. ammonia, acids, detergents, etc.) or organic matter (e.g. urine, feces, etc.) will release chlorine gas which is irritating to eyes, lungs and mucous membranes. H-4R

Manufactured by:
CLEARWATER CHEMICAL CORPORATION
1575 Sunshine Drive, Clearwater, Florida 34625
(813) 461-6116

EPA REG. NO. 53257-6 EPA EST. NO. 53257-FL-001

Hypochlorite Solution UN 1791

Net Contents: 1 Gallon

**SODIUM HYPOCHLORITE
SOLUTION
10.5% by weight**

ACTIVE INGREDIENT:
SODIUM HYPOCHLORITE 10.5%
INERT INGREDIENTS 89.5%
KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)

IF CONTACT WITH EYES OCCURS, flush with water for at least 15 minutes. Get prompt medical attention.
IF CONTACT WITH SKIN OCCURS, wash with plenty of soap and water.
IF SWALLOWED, drink large amounts of water. DO NOT induce vomiting. Call a physician or poison control center immediately.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

Formulators using this product are responsible for obtaining EPA registration of their formulated products.

NOTE: This product degrades with age. Use a chlorine test kit and increase dosage as necessary to obtain the required level of available chlorine.

STORAGE AND DISPOSAL: Store this product in a cool, dry area, away from direct sunlight and heat to avoid deterioration. In case of spill, flood areas with large quantities of water. Product or residue which cannot be used should be diluted with water before disposal in a sanitary sewer. Return empty container to dealer or distributor for deposit refund. Do not reuse container. If not returned for deposit refund, place in trash for collection. Do not contaminate food or feed by storage, disposal, or cleaning of equipment.

SWIMMING POOL WATER DISINFECTION: For a new pool or for spring start-up, superchlorinate with 5 3/4 to 107 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Adjust and maintain pool water pH to between 7.2 to 7.6. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 1 1/4 oz. of this product for each 10,000 gallons of water to yield an available chlorine residual between 0.8 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to 1.5 ppm available chlorine. Test the pH, available chlorine and alkalinity of the water frequently, with appropriate test kits. Frequency of water treatment will depend upon temperature and number of swimmers.

Every 7 days, or as necessary, superchlorinate the pool with 5 3/4 to 107 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Do not reenter pool until the chlorine residual is between 1.0 to 3.0 ppm.

At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

SPAS, HOT-TUBS: Apply 5 oz. of product per 1000 gallons of water to obtain a free available chlorine concentration of 5 ppm, as determined by a suitable chlorine test kit. Adjust and maintain pool water pH to between 7.2 and 7.6. Some oils, lotions, fragrances, cleaners, etc. may cause foaming or cloudy water as well as reduce the efficiency of the product.

To maintain the water, apply 5 oz. of product per 1000 gallons of water over the surface to maintain a chlorine concentration of 5 ppm.

After each use, shock treat with 8 oz. of this product per 500 gallons of water to control odor and algae. During extended periods of disuse, add 4 oz. of product daily per 1000 gallons of water to maintain a 3 ppm chlorine concentration.

ASPHALT OR WOOD ROOFS AND SIDINGS: To control fungus and mildew, first remove all physical soil by brushing and hosing with clean water, and apply a 5000 ppm available chlorine solution. Mix 6 oz. of this product per gallon of water and brush or spray roof or siding. After 30 minutes, rinse by hosing with clean water.

3 5/8"

8"

11-4



UN 1791

SODIUM HYPOCHLORITE SOLUTION

10.5% by weight

ACTIVE INGREDIENT:
SODIUM HYPOCHLORITE10.5%
INERT INGREDIENTS89.5%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)
IF CONTACT WITH EYES OCCURS, flush with water for at least 15 minutes. Get prompt medical attention.
IF CONTACT WITH SKIN OCCURS, wash with plenty of soap and water.
IF SWALLOWED, drink large amounts of water. DO NOT induce vomiting. Call a physician or poison control center immediately.

SWIMMING POOL WATER DISINFECTION

For a new pool or spring start-up, superchlorinate with 53% to 107 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Adjust and maintain pool water pH to between 7.2 to 7.6. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 11 1/4 oz. of this product for each 10,000 gallons of water to yield an available chlorine residual between 0.6 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to 1.5 ppm available chlorine. Test the pH, available chlorine residual and alkalinity of the water frequently with appropriate test kits. Frequency of water treatment will depend upon temperature and number of swimmers.

Every 7 days, or as necessary, superchlorinate the pool with 53% to 107 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Do not reenter pool until the chlorine residual is between 1.0 to 3.0 ppm.


At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

SPAS, HOT-TUBS

SPAS/HOT TUBS - Apply 6 oz. of product per 1000 gallons of water to obtain a free available chlorine concentration of 5 ppm, as determined by a suitable chlorine test kit. Adjust and maintain pool water pH to between 7.2 and 7.8. Some oils, lotions, fragrances, cleaners, etc. may cause foaming or cloudy water as well as reduce the efficiency of the product. To maintain the water, apply 5 oz. of product per 1000 gallons of water over the surface to maintain a chlorine concentration of 5 ppm. After each use, shock treat with 8 oz. of this product per 500 gallons of water to control odor and algae. During extended periods of disuse, add 4 oz. of product daily per 1000 gallons of water to maintain a 3 ppm chlorine concentration.


ASPHALT OR WOOD ROOFS AND SIDINGS

To control fungus and mildew, first remove all physical soil by brushing and hosing with clean water, and apply a 500 ppm available chlorine solution. Mix 6 oz. of this product per gallon of water and brush or spray roof or siding. After 30 minutes, rinse by hosing with clean water.

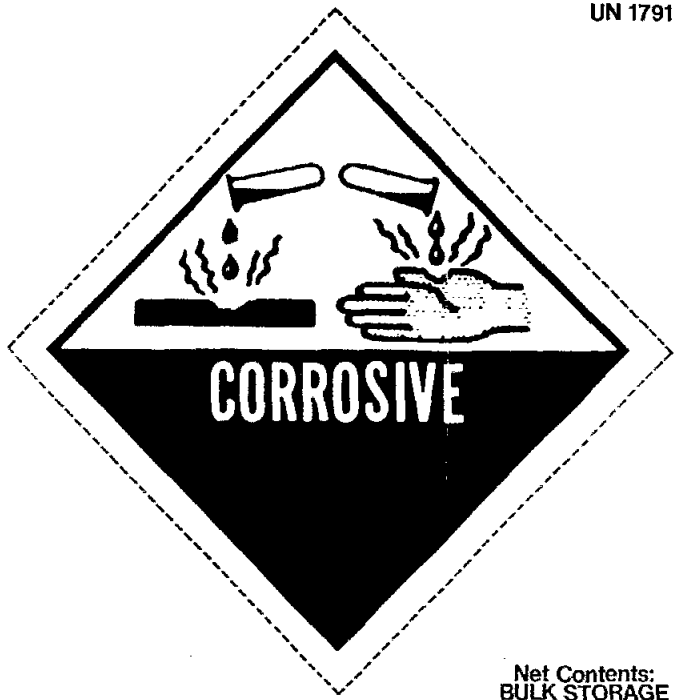

Net Contents:
BULK STORAGE

Manufactured by:
CLEARWATER CHEMICAL CORPORATION
1575 Sunshine Drive, Clearwater, Florida 34625 ☐ (813) 461-6116 EPA EST. NO. 53257 FL-001

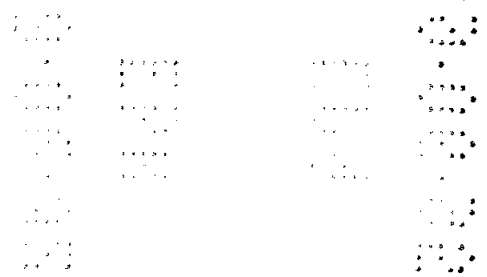

H-5-R

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
DANGER: Corrosive. May cause severe skin and eye irritation or chemical burns to broken skin. Causes eye damage. Wear safety glasses or goggles and rubber gloves when handling this product. Wash after handling. Avoid breathing vapors. Remove poorly ventilated areas as soon as possible. Do not return until strong odors have dissipated.
ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless specifically authorized by the appropriate Federal, State, Provincial, Territorial, or Municipal authority. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.
PHYSICAL OR CHEMICAL HAZARDS:
STRONG OXIDIZING AGENT: Mix only with water according to label directions. Mixing this product with combustible, ammonia, acids, detergents, etc. to organic matter (e.g. urine, feces, etc.) will release chlorine gas which is irritating to eyes, lungs and mucous membranes.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

Formulators using this product are responsible for obtaining EPA registration of their formulated products.

NOTE: This product degrades with age. Use a chlorine test kit and increase dosage as necessary to obtain the required level of available chlorine.

STORAGE AND DISPOSAL: Store this product in a cool, dry area, away from direct sunlight and heat to avoid deterioration. In case of spill, flood areas with large quantities of water. Product or residue which cannot be used should be diluted with water before disposal in a sanitary sewer. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

DISINFECTION OF DRINKING WATER (PUBLIC/INDIVIDUAL SYSTEMS)

PUBLIC SYSTEMS: Mix a ratio of 2 oz. of this product to 100 gallons of water. Begin feeding the solution with a hypochlorinator until a free available chlorine residual of at least 0.2 ppm and no more than 0.5 ppm is attained throughout the distribution system. Check water frequently with a chlorine test kit. Bacteriological sampling must be conducted at a frequency no less than that prescribed by the National Interim Primary Drinking Water Regulations. Contact your local Health Department for further details.

INDIVIDUAL SYSTEMS: DUG WELLS: Upon completion of the casing (bring) wash the interior of the casing (bring) with a 100 ppm available chlorine solution using a stiff brush. This solution can be made by thoroughly mixing 2 oz. of this product into 10 gallons of water. After covering the well, pour the sanitizing solution into the well through both the passageway opening and the pipeline. Wash the exterior of the pump cylinder also with the sanitizing solution. Start pump and pump water until the strong odor of chlorine in water is noted. Stop pump and wait at least 24 hours. After 24 hours flush well until all traces of chlorine have been removed from the water. Consult your local Health Department for further details.

INDIVIDUAL WATER SYSTEMS: DRILLED, DRIVEN & BORED WELLS: Run pump until water is as free from turbidity as possible. Pour a 100 ppm available chlorine sanitizing solution into the well. This solution can be made by thoroughly mixing 2 oz. of this product into 10 gallons of water. Add 1.5 to 10 gallons of clean, chlorinated water to the well in order to force the sanitizer into the rock formation. Wash the exterior of pump cylinder with the sanitizer. Drop pipeline into well, start pump and pump water until strong odor of chlorine in water is noted. Stop pump and wait at least 24 hours. After 24 hours flush well until all traces of chlorine have been removed from the water. Deep wells with high water levels may necessitate the use of special methods for introduction of sanitizer into the well. Consult your local Health Department for further details.

INDIVIDUAL WATER SYSTEMS: FLOWING ARTESIAN WELLS: Artesian wells generally do not require disinfection. If analyses indicate persistent contamination, the well should be disinfected. Consult your local Health Department for further details.

SODIUM HYPOCHLORITE SOLUTION
10.5% by weight

ACTIVE INGREDIENT:
 SODIUM HYPOCHLORITE 10.5%
INERT INGREDIENTS 89.5%

KEEP OUT OF REACH OF CHILDREN
DANGER

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)

IF CONTACT WITH EYES OCCURS, flush with water for at least 15 minutes. Get prompt medical attention.
IF CONTACT WITH SKIN OCCURS, wash with plenty of soap and water.
IF SWALLOWED, drink large amounts of water. DO NOT induce vomiting. Call a physician or poison control center immediately.

SEWAGE & WASTEWATER EFFLUENT TREATMENT

The disinfection of sewage effluent must be evaluated by determining the total number of coliform bacteria and/or fecal coliform bacteria, as determined by the Most Probable Number (MPN) procedure, of the chlorinated effluent has been reduced to or below the maximum permitted by the controlling regulatory jurisdiction.

On the average, satisfactory disinfection of secondary wastewater effluent can be obtained when the chlorine residual is 0.5 ppm after 15 minutes contact. Although the chlorine residual is the critical factor in disinfection, the importance of correlating chlorine residual with bacterial kill must be emphasized. The MPN of the effluent, which is directly related to the water quality standards requirements, should be the final and primary standard and the chlorine residual should be considered an operating standard valid only to the extent verified by the coliform quality of the effluent.

The following are critical factors affecting wastewater disinfection.

1. **Mixing:** It is imperative that the product and the wastewater be instantaneously and completely flash mixed to assure reaction with every chemically active soluble and particulate component of the wastewater.
2. **Contacting:** Upon flash mixing, the flow through the system must be maintained.
3. **Dosage/Residual Control:** Successful disinfection is extremely dependant on response to fluctuating chlorine demand to maintain a predetermined, desirable chlorine level. Secondary effluent should contain 0.2 to 1.0 ppm chlorine residual after a 15 to 30 minute contact time. A reasonable average of residual chlorine is 0.5 ppm after 15 minutes contact time.

EPA REG. NO. 53257-6

Manufactured by:
CLEARWATER CHEMICAL CORPORATION
 1575 Sunshine Drive, Clearwater, Florida 34625 ☐ (813) 451-6166

EPA EST. No. 53257-FL-001

LAUNDRY SANITIZERS

Household Laundry Sanitizers

IN SOAKING SUDS - Thoroughly mix 3 oz. of this product to 10 gallons of wash water to provide 200 ppm available chlorine. Wait 5 minutes, then add soap or detergent. Immerse laundry for at least 11 minutes prior to starting the wash/rinse cycle.

IN WASHING SUDS - Thoroughly mix 3 oz. of this product to 10 gallons of wash water containing clothes to provide 200 ppm available chlorine. Wait 5 minutes, then add soap or detergent and start the wash/rinse cycle.

Commercial Laundry Sanitizers

Wet fabrics or clothes should be spun dry prior to sanitization. Thoroughly mix 3 oz. of this product with 10 gallons of water to yield 200 ppm available chlorine. Promptly after mixing the sanitizer, add the solution into the prewash prior to washing fabrics/clothes in the regular wash cycle with a good detergent. Test the level of available chlorine. If solution has been allowed to stand, Add more of this product if the available chlorine level has dropped below 200 ppm.

ASPHALT OR WOOD ROOFS AND SIDINGS

To control fungus and mildew, first remove all physical soil by brushing and hosing with clean water, and apply a 5000 ppm available chlorine solution. Mix 6 oz. of this product per gallon of water and brush or spray roof or siding. After 30 minutes, rinse by hosing with clean water.

SWIMMING POOL WATER DISINFECTION

For a new pool or spring start-up, superchlorinate with 5 1/4 to 10 7/8 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Adjust and maintain pool water pH to between 7.2 to 7.6. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 1 1/4 oz. of this product for each 10,000 gallons of water to yield an available chlorine residual between 0.5 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to 1.5 ppm available chlorine. Test the pH, available chlorine residual and alkalinity of the water frequently with appropriate test kits. Frequency of water treatment will depend upon temperature and number of swimmers.

Every 7 days, or as necessary, superchlorinate the pool with 5 1/4 to 10 7/8 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Do not reenter pool until the chlorine residual is between 1.0 to 3.0 ppm.

At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

SPAS, HOT-TUBS

SPAS/HOT TUBS - Apply 5 oz. of product per 1000 gallons of water to obtain a free available chlorine concentration of 5 ppm, as determined by a suitable chlorine test kit. Adjust and maintain pool water pH to between 7.2 and 7.8. Some oils, lotions, fragrances, cleaners, etc. may cause foaming or cloudy water as well as reduce the efficiency of the product. To maintain the water, apply 5 oz. of product per 1000 gallons of water over the surface to maintain a chlorine concentration of 5 ppm. After each use, shock treat with 8 oz. of this product per 500 gallons of water to control odor and algae. During extended periods of use, add 4 oz. of product daily per 1000 gallons of water to maintain a 3 ppm chlorine concentration.



Net Contents:
55 GALLONS

H-6-R

SODIUM HYPOCHLORITE SOLUTION

10.5% by weight

UN 1791

ACTIVE INGREDIENT:
SODIUM HYPOCHLORITE.....10.5%
INERT INGREDIENTS.....89.5%

**KEEP OUT OF REACH
OF CHILDREN
DANGER**

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)

IF CONTACT WITH EYES OCCURS, flush with water for at least 15 minutes. Get prompt medical attention.
IF CONTACT WITH SKIN OCCURS, wash with plenty of soap and water.
IF SWALLOWED, drink large amounts of water. DO NOT induce vomiting.
Call a physician or poison control center immediately.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. May cause severe skin and eye irritation or chemical burns to broken skin. Causes eye damage. Wear safety glasses or goggles and rubber gloves when handling this product. Wash after handling. Avoid breathing vapors. Vacate poorly ventilated areas as soon as possible. Do not return until strong odors have dissipated.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS:
STRONG OXIDIZING AGENT: Mix only with water according to label directions. Mixing this product with chemicals (e.g. ammonia, acids, detergents, etc.) or organic matter (e.g. urine, feces, etc.) will release chlorine gas which is irritating to eyes, lungs and mucous membranes.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING

Formulators using this product are responsible for obtaining EPA registration of their formulated products.

NOTE: This product degrades with age. Use a chlorine test kit and increase dosage as necessary to obtain the required level of available chlorine.

STORAGE AND DISPOSAL: Store this product in a cool, dry area, away from direct sunlight and heat to avoid deterioration. In case of spill, flood areas with large quantities of water. Product or rinse water cannot be used should be diluted with water before disposal in a sanitary sewer. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

SWIMMING POOL WATER DISINFECTION

For a new pool or spring start-up, superchlorinate with 53% to 107 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Adjust and maintain pool water pH to between 7.2 to 7.5. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 1 1/4 oz. of this product for each 10,000 gallons of water to yield an available chlorine residual between 0.5 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to 1.5 ppm available chlorine. Test the pH, available chlorine residual and alkalinity of the water frequently with appropriate test kits. Frequency of water treatment will depend upon temperature and number of swimmers.

Every 7 days, or as necessary, superchlorinate the pool with 53% to 107 oz. of product for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test kit. Do not reenter pool until this chlorine residual is between 1.0 to 3.0 ppm.

At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

SPAS, HOT-TUBS

SPAS/HOT TUBS: Apply 5 oz. of product per 1000 gallons of water to obtain a free available chlorine concentration of 5 ppm, as determined by a suitable chlorine test kit. Adjust and maintain pool water pH to between 7.2 and 7.5. Some oils, lotions, fragrances, cleaners, etc. may cause foaming or cloudy water as well as reduce the efficiency of the product. To maintain the water, apply 5 oz. of product per 1000 gallons of water over the surface to maintain a chlorine concentration of 5 ppm. After each use, shock treat with 3 oz. of this product per 500 gallons of water to control odor and algae. During extended periods of disuse, add 4 oz. of product daily for 1000 gallons of water to maintain a 3 ppm chlorine concentration.

SANITIZATION OF NONPOROUS FOOD CONTACT SURFACES

RINSE METHOD: A solution of 100 ppm available chlorine may be used in the sanitizing solution if a chlorine test kit is available. Solutions containing an initial concentration of 100 ppm available chlorine must be tested and adjusted periodically to insure that the available chlorine does not drop below 50 ppm. Prepare a 100 ppm sanitizing solution by thoroughly mixing 1 1/2 oz. of this product with 10 gallons of water. If no test kit is available, prepare a sanitizing solution by thoroughly mixing 3 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight.

Clean equipment surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. If solution contains less than 50 ppm available chlorine, as determined by a suitable test kit, either discard the solution or add sufficient product to reestablish a 200 ppm residual. Do not rinse equipment with water after treatment and do not soak equipment overnight. Sanitizers used in automated systems may be used for general cleaning but may not be re-used for sanitizing purposes.


IMMERSION METHOD: A solution of 100 ppm available chlorine may be used in the sanitizing solution if a chlorine test kit is available. Solutions containing an initial concentration of 100 ppm available chlorine must be tested and adjusted periodically to insure that the available chlorine does not drop below 50 ppm. Prepare a 100 ppm sanitizing solution by thoroughly mixing 1 1/2 oz. of this product with 10 gallons of water. If no test kit is available, prepare a sanitizing solution by thoroughly mixing 3 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight.

Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. If solution contains less than 50 ppm available chlorine, as determined by a suitable test kit, either discard the solution or add sufficient product to reestablish a 200 ppm residual. Do not rinse equipment with water after treatment. Sanitizers used in automated systems may be used for general cleaning but may not be re-used for sanitizing purposes.

FLOW/PRESSURE METHOD: Disassemble equipment and thoroughly clean after use. Assemble equipment in operating position prior to use. Prepare a volume of a 200 ppm available chlorine sanitizing solution equal to 110% of volume capacity of the equipment by mixing the product in a ratio of 3 oz. product with 10 gallons of water. Pump solution through the system until full flow is obtained at all extremities, the system is completely filled with the sanitizer and all air is removed from the system. Close drain valves and hold under pressure for at least 2 minutes to insure contact with all internal surfaces. Remove some cleaning solution from drain valve and test with a chlorine test kit. Repeat entire cleaning/sanitizing process if effluent contains less than 50 ppm available chlorine.

CLEAN-IN-PLACE METHOD: Thoroughly clean equipment after use. Prepare a volume of a 200 ppm available chlorine sanitizing solution equal to 110% of volume capacity of the equipment by mixing the product in a ratio of 3 oz. product with 10 gallons of water. Pump solution through the system until full flow is obtained at all extremities, the system is completely filled with the sanitizer and all air is removed from the system. Close drain valves and hold under pressure for at least 10 minutes to insure contact with all internal surfaces. Remove some cleaning solution from drain valve and test with a chlorine test kit. Repeat entire cleaning/sanitizing process if effluent contains less than 50 ppm available chlorine.

SPRAY/FOG METHOD: Pre-clean all surfaces after use. Use a 200 ppm available chlorine solution to control bacteria, mold or fungi and a 600 ppm solution to control bacteriophage. Prepare a 200 ppm sanitizing solution of sufficient size by thoroughly mixing the product in a ratio of 3 oz. product with 10 gallons of water. Prepare a 600 ppm solution by thoroughly mixing the product in a

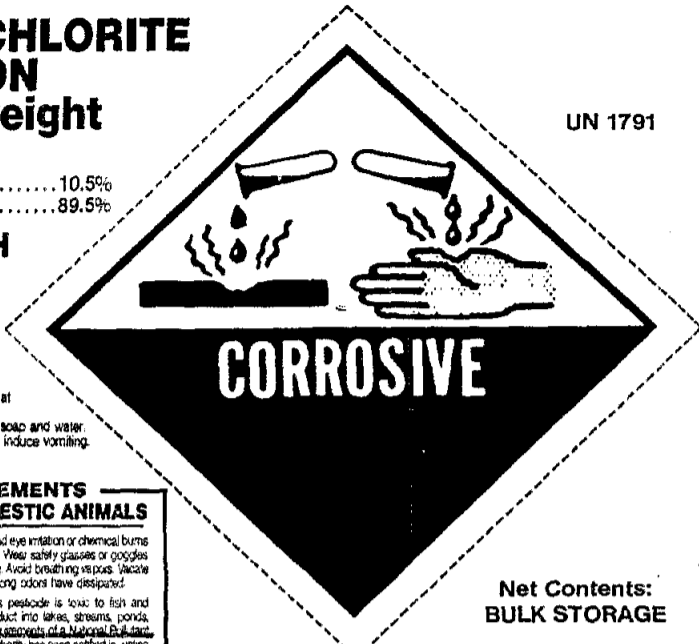

Net Contents:
BULK STORAGE

ratio of 8 1/2 oz. product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours. Prior to using equipment, rinse all surfaces treated with a 600 ppm solution with a 200 ppm solution.

SEWAGE & WASTEWATER EFFLUENT TREATMENT

The disinfection of sewage effluent must be evaluated by determining the total number of coliform bacteria and/or fecal coliform bacteria, as determined by the Most Probable Number (MPN) procedure, of the chlorinated effluent has been reduced to or below the maximum permitted by the controlling regulatory jurisdiction.

On the average, satisfactory disinfection of secondary wastewater effluent can be obtained when the chlorine residual is 0.5 ppm after 15 minutes contact. Although the chlorine residual is the critical factor in disinfection, the importance of correlating chlorine residual with bacterial kill must be emphasized. The MPN of the effluent, which is directly related to the water quality standards requirements, should be the final and primary standard and the chlorine residual should be considered an operating standard valid only to the extent verified by the coliform quality of the effluent.

The following are critical factors affecting wastewater disinfection.

1. **Mixing:** It is imperative that the product and the wastewater be instantaneously and completely flash mixed to assure reaction with every chemically active soluble and particulate component of the wastewater.
2. **Contacting:** Upon flash mixing, the flow through the system must be maintained.
3. **Dosage/Residual Control:** Successful disinfection is extremely dependent on response to fluctuating chlorine demand to maintain a predetermined, desirable chlorine level. Secondary effluent should contain 0.2 to 1.0 ppm chlorine residual after a 15 to 30 minute contact time. A reasonable average of residual chlorine is 0.5 ppm after 15 minutes contact time.

DISINFECTION OF DRINKING WATER (PUBLIC/INDIVIDUAL SYSTEMS)

PUBLIC SYSTEMS: Mix a ratio of 2 oz. of this product to 100 gallons of water. Begin feeding this solution with a hypochlorinator until a free available chlorine residual of at least 0.2 ppm and no more than 0.6 ppm is attained throughout the distribution system. Check water frequently with a chlorine test kit. Bacteriological sampling must be conducted at a frequency no less than that prescribed by the National Interim Primary Drinking Water Regulations. Contact your local Health Department for further details.

INDIVIDUAL WATER SYSTEMS: DRILLED, DRIVEN & BORED WELLS Run pump until water is as free from turbidity as possible. Pour a 100 ppm available chlorine sanitizing solution into the well. This solution can be made by thoroughly mixing 2 oz. of this product into 10 gallons of water. Add 5 to 10 gallons of clean, chlorinated water to the well in order to force the sanitizer into the rock formation. Wash the exterior of pump cylinder with the sanitizer. Drop pipeline into well, start pump and pump water until strong odor of chlorine in water is noted. Stop pump and wait at least 24 hours. After 24 hours flush well until all traces of chlorine have been removed from the water. Consult your local Health Department for further details.

INDIVIDUAL WATER SYSTEMS: FLOWING ARTESIAN WELLS Artesian wells generally do not require disinfection. If analyses indicate persistent contamination, the well should be disinfected. Consult your local Health Department for further details.

COOLING TOWER/EVAPORATIVE CONDENSER WATER SLUG FEED METHOD

Initial Dose: When system is noticeably fouled, apply 53% to 107 oz. of this product per 10,000 gallons of water in the system to obtain from 5 to 10 ppm available chlorine. Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 1 1/4 oz. of this product per 10,000 gallons of water in the system daily, or as needed to maintain control and keep the chlorine residual at 1 ppm. Badly fouled systems must be cleaned before treatment is begun.

INTERMITTENT FEED METHOD - Initial Dose: When system is noticeably fouled, apply 53% to 107 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blowdown.

Subsequent Dose: When microbial control is evident, add 1 1/4 oz. of this product per 10,000 gallons of water in the system to obtain a 1 ppm residual. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blowdown. Badly fouled systems must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD - Initial Dose: When system is noticeably fouled, apply 53% to 107 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of 1 1/2 oz. of this product per 10,000 gallons of water lost by blowdown to maintain a 1 ppm residual. Badly fouled systems must be cleaned before treatment is begun.

LAUNDRY SANITIZERS

Household Laundry Sanitizers

IN SOAKING SUDS: Thoroughly mix 3 oz. of this product to 10 gallons of wash water to provide 200 ppm available chlorine. Wait 5 minutes, then add soap or detergent. Immerse laundry for at least 11 minutes prior to starting the wash/rinse cycle.

IN WASHING SUDS: Thoroughly mix 3 oz. of this product to 10 gallons of wash water containing clothes to provide 200 ppm available chlorine. Wait 5 minutes, then add soap or detergent and start the wash/rinse cycle.

Commercial Laundry Sanitizers

Wet fabrics or clothes should be spun dry prior to sanitization. Thoroughly mix 3 oz. of this product with 10 gallons of water to yield 200 ppm available chlorine. Promptly after mixing the sanitizer, add the solution into the prewash prior to washing fabrics/clothes in the regular wash cycle with a good detergent. Test the level of available chlorine, if solution has been allowed to stand. Add more of this product if the available chlorine level has dropped below 200 ppm.

ASPHALT OR WOOD ROOFS AND SIDINGS

To control fungus and mildew, first remove all physical soil by brushing and hosing with clean water, and apply a 5000 ppm available chlorine solution. Mix 7 oz. of this product per gallon of water and brush or spray roof or siding. After 30 minutes, rinse by hosing with clean water.

EPA REG. NO. 53257-6


EPA EST. NO. 53257-FL-001

Manufactured by:
CLEARWATER CHEMICAL CORPORATION
1575 Sunshine Drive, Clearwater, Florida 34625 • (813) 461-6116

SODIUM HYPOCHLORITE 10.5% by weight

ACTIVE INGREDIENT:
SODIUM HYPOCHLORITE 10.5%
INERT INGREDIENTS 89.5%

UN 1791

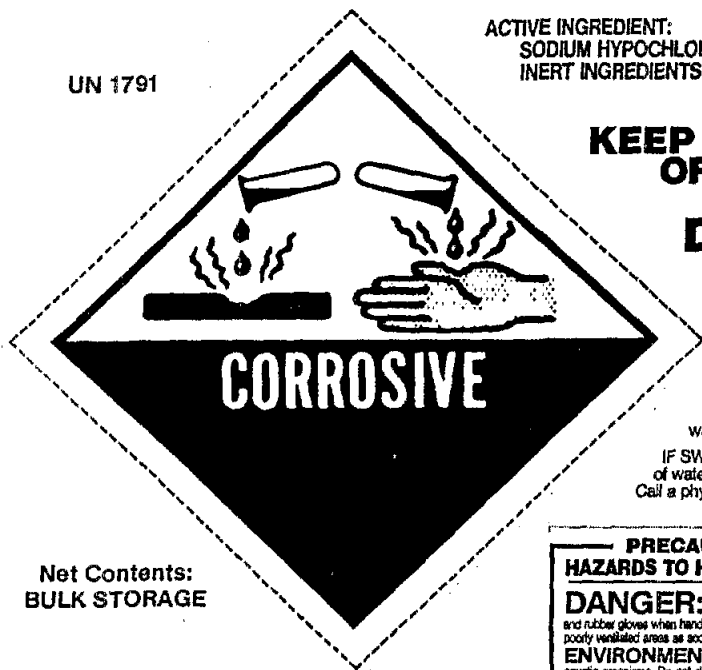

**KEEP OUT OF REACH
OF CHILDREN**

DANGER

**STATEMENT OF PRACTICAL
TREATMENT (FIRST AID)**

IF CONTACT WITH EYES OCCURS,
flush with water for at least 15 minutes.
Get prompt medical attention.

IF CONTACT WITH SKIN OCCURS,
wash with plenty of soap and water.

IF SWALLOWED, drink large amounts
of water. DO NOT induce vomiting.
Call a physician or poison control center immediately.

**Net Contents:
BULK STORAGE**

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT
IN A MANNER INCONSISTENT WITH ITS LABELING

Formulators using this product are responsible for obtaining EPA registration of their formulated products.

NOTE: This product degrades with age. Use a chlorine test kit and increase dosage as necessary to obtain the required level of available chlorine.

STORAGE AND DISPOSAL: Store this product in a cool, dry area, away from direct sunlight and heat to avoid deterioration. In case of spill, flood areas with large quantities of water. Product or rinseate which cannot be used should be diluted with water before disposal in a sanitary sewer. Do not contaminate food or feed by storage, disposal or cleaning of equipment.

SANITIZATION OF POROUS FOOD CONTACT SURFACES

RINSE METHOD: Prepare a 600 ppm solution by thoroughly mixing 8 oz. of this product with 10 gallons of water. Clean surfaces in the normal manner. Rinse all surfaces thoroughly with the 600 ppm solution, maintaining contact for at least 2 minutes. Prepare a 200 ppm sanitizing solution by thoroughly mixing 3 oz. of this product with 10 gallons of water. Prior to using equipment, rinse all surfaces with a 200 ppm available chlorine solution. Do not rinse and do not soak equipment overnight.

IMMERSION METHOD: Prepare a 600 ppm solution by thoroughly mixing, in an immersion tank, 8 oz. of this product with 10 gallons of water. Clean equipment in the normal manner. Immerse equipment in the 600 ppm solution for at least 2 minutes. Prepare a 200 ppm sanitizing solution by thoroughly mixing 3 oz. of this product with 10 gallons of water. Prior to using equipment, immerse all surfaces in a 200 ppm available chlorine solution. Do not rinse and do not soak equipment overnight.

SPRAY/FOG METHOD: Pre-clean all surfaces after use. Prepare a 600 ppm available chlorine sanitizing solution of sufficient size by thoroughly mixing the product in a ratio of 8 oz. product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours. Prior to using equipment, rinse all surfaces with a 200 ppm available chlorine solution. Prepare a 200 ppm sanitizing solution by thoroughly mixing 3 oz. of this product with 10 gallons of water.

SANITIZATION OF NONPOROUS NON-FOOD CONTACT SURFACES

RINSE METHOD: Prepare a sanitizing solution by thoroughly mixing 3 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight. Clean equipment surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. Do not rinse equipment with water after treatment and do not soak equipment overnight.

IMMERSION METHOD: Prepare a sanitizing solution by thoroughly mixing, in an immersion tank, 3 oz. of this product with 10 gallons of water to provide approximately 200 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. Do not rinse equipment with water after treatment.

SPRAY/FOG METHOD: Pre-clean all surfaces after use. Prepare a 200 ppm available chlorine sanitizing solution of sufficient size by thoroughly mixing the product in a ratio of 3 oz. product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Prior to using equipment, thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours.

SANITIZATION OF POROUS NON-FOOD CONTACT SURFACES

RINSE METHOD: Prepare a sanitizing solution by thoroughly mixing 8 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean surfaces in the normal manner. Prior to use, rinse all surfaces thoroughly with the sanitizing solution, maintaining contact with the sanitizer for at least 2 minutes. Do not rinse equipment with water after treatment and do not soak equipment overnight.

IMMERSION METHOD: Prepare a sanitizing solution by thoroughly mixing, in an immersion tank, 8 oz. of this product with 10 gallons of water to provide approximately 600 ppm available chlorine by weight. Clean equipment in the normal manner. Prior to use, immerse equipment in the sanitizing solution for at least 2 minutes and allow the sanitizer to drain. Do not rinse equipment with water after treatment.

SPRAY/FOG METHOD: After cleaning, sanitize non-food contact surfaces with 600 ppm available chlorine by thoroughly mixing the product in a ratio of 8 oz. of this product with 10 gallons of water. Use spray or fogging equipment which can resist hypochlorite solutions. Always empty and rinse spray/fog equipment with potable water after use. Prior to using equipment, thoroughly spray or fog all surfaces until wet, allowing excess sanitizer to drain. Vacate area for at least 2 hours.

PUBLIC WATER SYSTEMS

RESERVOIRS - ALGAE CONTROL: Hypochlorite streams feeding the reservoir. Suitable feeding points should be selected on each stream at least 50 yards upstream from the points of entry into the reservoir.

MAINS: Thoroughly flush section to be sanitized by discharging from hydrants. Permit a water flow of at least 2.5 feet per minute to continue under pressure while injecting this product by means of a hypochlorinator. Stop water flow when a chlorine residual level of 50 ppm is obtained at the low pressure end of the new main section after a 24 hour retention time. When chlorination is completed, the system must be flushed free of all heavily chlorinated water.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive, may cause severe skin and eye irritation or chemical burns to broken skin. Causes eye damage. Wear safety glasses or goggles and rubber gloves when handling the product. Wash after handling. Avoid breathing vapors. Vacate poorly ventilated areas as soon as possible. Do not return until strong odors have dissipated.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, coasts or other waters unless in accordance with the requirements of a National Discharge Elimination System (NDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS:
STRONG OXIDIZING AGENT: Mix only with water according to label directions. Mixing this product with chemicals (e.g. ammonia, acids, detergents, etc.) or organic matter (e.g. urine, feces, etc.) will release chlorine gas which is irritating to eyes, lungs and mucous membranes.

NEW TANKS, BASINS, ETC.: Remove all physical soil from surfaces. Place 24 oz. of this product for each 5 cubic feet of working capacity (500 ppm available chlorine). Fill to working capacity and allow to stand for at least 4 hours. Drain and flush with potable water and return to surface.

NEW FILTER SAND: Apply 96 oz. of this product for each 150 to 200 cubic feet of sand. The action of the product dissolving as the water passes through the bed will aid in sanitizing the new sand.

NEW WELLS: Flush the casing with a 50 ppm available chlorine solution of water containing 6 oz. of this product for each 100 gallons of water. The solution should be pumped or fed by gravity into the well after thorough mixing with agitation. The well should stand for several hours or overnight under chlorination. It may then be pumped until a representative raw water sample is obtained. Bacterial examination of the water will indicate whether further treatment is necessary.

EXISTING EQUIPMENT: Remove equipment from service, thoroughly clean surfaces of all physical soil. Sanitize by placing 24 oz. of this product for each 5 cubic feet capacity (approximately 500 ppm available chlorine). Fill to working capacity and let stand at least 4 hours. Drain and place in service. If the previous treatment is not practical, surfaces may be sprayed with a solution containing 6 oz. of this product for each 5 gallons of water (approximately 1000 ppm available chlorine). After drying, flush with water and return to service.

FARM PREMISES

Remove all animals, poultry, and feed from premises, vehicles, and enclosures. Remove all litter and manure from floors, walls and surfaces of barns, pens, stalls, chutes and other facilities occupied or traversed by animals or poultry. Empty all troughs, racks and other feeding and watering appliances. Thoroughly clean all surfaces with soap or detergent and rinse with water. To disinfect, saturate all surfaces with a solution of at least 1000 ppm available chlorine for a period of 10 minutes. A 1000 ppm solution can be made by thoroughly mixing 12 oz. of this product with 10 gallons of water. Immerse all halers, ropes and other types of equipment used in handling and restraining animals or poultry, as well as the cleaned forks, shovels and scrapers used for removing litter and manure. Ventilate buildings, cars, boats and other closed spaces. Do not house livestock or poultry or employ equipment until chlorine has been dissipated. All treated feed racks, mangers, troughs, automatic feeders, fountains and waterers must be rinsed with potable water before reuse.

PULP AND PAPER MILL PROCESS WATER SYSTEMS

SLUG FEED METHOD - Initial Dose: When system is noticeably fouled, apply 53 1/2 to 107 oz. of this product per 10,000 gallons of water in the system to obtain from 5 to 10 ppm available chlorine. Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 11 1/2 oz. of this product per 10,000 gallons of water in the system daily, or as needed to maintain control and keep the chlorine residual at 1 ppm. Badly fouled systems must be cleaned before treatment is begun.

INTERMITTENT FEED METHOD - Initial Dose: When system is noticeably fouled, apply 53 1/2 to 107 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blowdown.

Subsequent Dose: When microbial control is evident, add 11 1/2 oz. of this product per 10,000 gallons of water in the system to obtain a 1 ppm residual. Apply half (or 1/3, 1/4, or 1/5) of this initial dose when half (or 1/3, 1/4, or 1/5) of the water in the system has been lost by blowdown. Badly fouled systems must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD - Initial Dose: When system is noticeably fouled, apply 53 1/2 to 107 oz. of this product per 10,000 gallons of water in the system to obtain 5 to 10 ppm available chlorine.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of 1 1/2 oz. of this product per 1,000 gallons of water lost by blowdown to maintain a 1 ppm residual. Badly fouled systems must be cleaned before treatment is begun.

BRIQUETTES OR TABLETS - Initial Dose: Initially slug dose the system with 53 1/2 oz. of this product per 10,000 gallons of water in the system. Badly fouled systems must be cleaned before treatment is begun.

Subsequent Dose: When microbial control is evident, add 11 1/2 oz. of this product per 10,000 gallons of water in the system daily, or as needed to maintain control and keep the chlorine residual at 1 ppm. Badly fouled systems must be cleaned before treatment is begun.

AGRICULTURAL USES

FOOD EGG SANITIZATION: Thoroughly clean all eggs. Thoroughly mix 3 oz. of this product with 10 gallons of warm water to produce a 200 ppm available chlorine solution. The sanitizer temperature should not exceed 150° F. Spray the warm sanitizer so that the eggs are thoroughly wetted. Allow the eggs to thoroughly dry before casing or breaking. Do not apply a potable water rinse. The solution should not be re-used to sanitize eggs.

FRUIT & VEGETABLE WASHING: Thoroughly clean all fruits and vegetables in a wash tank. Thoroughly mix 6 oz. of this product in 200 gallons of water to make a sanitizing solution of 25 ppm available chlorine. After draining the tank, submerge fruit or vegetables for 2 minutes in a second wash tank containing the recirculating sanitizing solution. Spray rinse vegetables with the sanitizing solution prior to packaging. Rinse fruit with potable water only prior to packaging.

Manufactured by:
CLEARWATER CHEMICAL CORPORATION
1575 Sunshine Drive, Clearwater, Florida 34625

EPA REG. NO. 53257-8

EPA EST. NO. 53257-FL-001