

WEATHERING STAIN

ACRYLIC LATEX SOLID HIDE
OUTSIDE WHITE

1120

ACCEPTED
MAY 20 1986
Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 53357-1

KEEP OUT OF REACH OF CHILDREN
CAUTION

Active Ingredient	
3-Iodo-2-Propynyl Butyl	0.5%
Carbonate	99.5%
Other Ingredients	100.00%

EPA Reg. No.
EPA Est. No.
See side panels for additional
cautionary statements.

Do not take internally.

Harmful if swallowed or inhaled. Avoid breathing spray mist. Avoid contact with eyes, skin or clothing. Wash thoroughly with soap and water after handling and before smoking or eating. Remove contaminated clothing and wash before reuse.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.

IF SWALLOWED: Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Avoid alcohol. Call a physician immediately.


IF INHALED: Remove victim to fresh air. Apply artificial respiration, preferably mouth to mouth, if indicated.

IF IN EYES: Flush with plenty of water. Get medical attention if irritation persists.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

HARRISON PAINT CORP.
Canton, Ohio 44711 U.S.A.

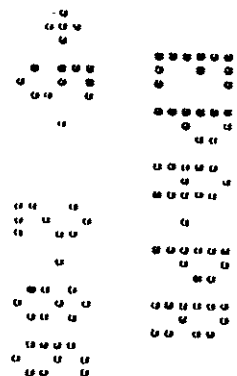

WOODUCK™

**LATEX WEATHERING STAIN
SOLID HIDE & SEMI-TRANSPARENT
WOOD PRESERVATIVE**

WOODUCK Latex Stains are specially formulated for use on unstained or previously painted wood. These are pigmented products that will not obscure the natural textures of unpainted wood, but will provide a decorative and protective coating for exterior substrates. These products contain ample amounts of wood preservative to help prevent fungal rot, decay, and general decomposition of wood. Easy to apply, it is a durable coating that resists cracking, peeling, blistering and mildew.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This product is for exterior use only and is recommended for shingles (not asbestos), shakes, clapboards, smooth or rough-cut wood siding, decks, hand-hewn beams, plywood, porches, railings, outdoor furniture, structural support timbers, flat beds, cold frames and greenhouses. No sealers are necessary for frequent contact surfaces. The product is not recommended for wood used for ground, food, feed or potable water contact. Cover desirable plants and shrubs to avoid possible injury. This product can be used where dairy and farm animals may come in contact with the treated wood.

SURFACE PREPARATION: All surfaces should be thoroughly cleaned and completely free of dirt, wax, grease and all other foreign matter. Remove all dust from surface before applying Wooduck weathering stains.

NEW WOOD — Two coats are recommended for optimum results. Two coat application results in a rich, uniform finish that will give additional durability and color retention.

NOTE: SOLID HIDE STAIN — When coating Redwood or Cedar (which contain tannins), we recommend using #40 Acrylic Wood Primer, preferably two coats. This product is designed to block out these bleeding type stains or water soluble dyes that are commonly present in Redwood or Cedar.

SEMI-TRANSPARENT — Use no primer with this product. Although some bleeding may occur on Redwood and Cedar, it will soon blend in with the overall weathered look of this product.

PREVIOUSLY PAINTED WOOD — Previously painted or stained wood may be recoated provided the surface has been completely sanded to a dull finish before application. It is suggested that on previously painted surfaces a sample area be tested for color determination only.

STAIN PREPARATION: Stir stain thoroughly and make sure all pigments are in suspension. Under normal conditions no thinning should be necessary. If thinning is desired, use clean water. All tinted material should be inter-mixed to insure color uniformity from can to can.

APPLICATION: Apply one or two coats by brush, roller or spray. During application maintain a wet edge to guard against lap marks. If two coats are desired, the first coat should be allowed to dry a minimum of 2 hours under normal drying conditions. One coat dry times are from 1 to 3 hours, but always allow at least 2 hours between coats. Never apply below 50°.

CLEAN-UP: Clean water and mild detergent.

TINT-BASES: Many additional colors available with use of tint bases.

STORAGE AND DISPOSAL

STORAGE: Close container after each use and do not store at temperatures below 32° F.

DISPOSAL: Do not reuse container. Rinse thoroughly before discarding in trash. Securely wrap original container in several layers of newspaper and discard in trash.