

JUN 29 1995

Harrison Paint Corporation
c/o E. David Lewis
Pazianos Associates
1338 G Street, S.E.
Washington, D.C. 20003

Gentlemen:

Subject: Revised Basic Formula & Labeling
Wooduck Weathering Stain - 1120 Outside White
EPA Registration No. 53354-1
Englehart's Submission Received on May 23, 1995

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended is acceptable provided that you:

1. Make the labeling changes listed below before you release the product for shipment bearing the amended labeling:

a. Update the Environmental Hazards Statement to include the following:

Do not apply directly to water, to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water by disposal of equipment washwaters.

Refer to PR Notices 93-3 and 93-8.

b. Delete the statement "This product can be used where dairy and farm animals may come in contact with treated wood". This contradicts the label statement "This product is not recommended for wood use for ground, food, feed, or potable water contact." Also this claim could result in residues in meat and milk for which no tolerances are established for the active ingredient in this product.

BEST COPY AVAILABLE

195

2 7 5

-2-

2. Submit one (1) copy of your final printed labeling before you release the product for shipment.

A stamped copy of the labeling is enclosed for your records.

The revised Basic Formula dated June 2, 1993 is acceptable and has been included in the files for this product. The revised label and basic formula supersede all previously accepted ones.

Sincerely yours,



James M. Stone
Acting Product Manager (22)
Fungicide Herbicide Branch
Registration Division (7505C)

Enclosure

BEST COPY AVAILABLE

2

3 9 5

Front Panel

WOODUCK WEATHERING STAIN

WOOD PRESERVATIVE

Acrylic Latex Solid Hide Outside White 1120

KEEP OUT OF REACH OF CHILDREN

CAUTION

Active Ingredient:

3-Iodo-2-Propynyl Butyl Carbamate..... 0.50%

Inert Ingredients:..... 99.50%

100.00%

EPA Reg. No. 53354-1

EPA Est. No. 53354-OH-01

See Side Panel for Additional Precautionary Statements


ACCEPTED
with COMMENTS
In EPA Letter Dated:

JUN 29 1995

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
approved, for the pesticide
registered under EPA Reg. No.

53354-1

Net Contents:

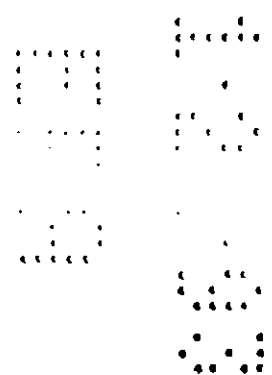

BEST COPY AVAILABLE

January 14, 1993

3

4 9 5

Side Panel

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION

Do not take internally

Harmful if swallowed or inhaled. Avoid breathing spray mist. Avoid contact with eyes, skin, or clothing. Wash thoroughly with soap and water after handling and before smoking or eating. Remove contaminated clothing and wash before reuse.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.

IF SWALLOWED: Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person. Avoid alcohol. Call a physician immediately.

IF INHALED: Remove victim to fresh air. Apply artificial respiration, preferably mouth to mouth, if indicated.

IF IN EYES: Flush with plenty of water. Get medical attention if irritation persists.


ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame.

HARRISON PAINT CORPORATION
Canton, Ohio 44711

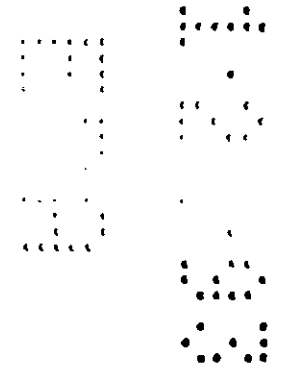

January 14, 1993

4

5 9 5

Back Panel

WOODUCK LATEX WEATHERING STAIN SOLID HIDE & SEMI TRANSPARENT WOOD PRESERVATIVE

Wooduck Latex Stains are specially formulated for use on unstained or previously painted wood. These are pigmented products that will not obscure the natural textures of unpainted wood, but will provide a decorative and protective coating for exterior substrates. These products contain ample amounts of wood preservative to help prevent fungal rot, decay, and general decomposition of wood. Easy to apply, it is a durable coating that resists cracking, peeling, blistering, and mildew.

DIRECTIONS FOR USE: It is a violation of Federal law to use this product in a manner inconsistent with its labeling. This product is for exterior use only and is recommended for shingles (not asbestos), shakes, clapboards, smooth or rough-cut wood siding, decks, hand-hewn beams, plywood, porches, railings, outdoor furniture, structural support timbers, flat beds, cold frames, and greenhouses. No sealers are necessary for frequent contact surfaces. The product is not recommended for wood used for ground, food, feed, or potable water contact. Cover desirable plants and shrubs to avoid possible injury. This product can be used where dairy and farm animals may come in contact with the treated wood.

SURFACE PREPARATION: All surfaces should be thoroughly cleaned and completely free of dirt, wax, grease, and all other foreign matter. Remove all dust from surface before applying Wooduck Weathering stains.

NEW WOOD - Two coats are recommended for optimum results. Two coat application results in a rich, uniform finish that will give additional durability and color retention.

NOTE: SOLID HIDE STAIN - When coating Redwood or Cedar (which contain tannins), we recommend using #40 Acrylic Wood Primer, preferably two coats. This product is designed to block out those bleeding type stains or water soluble dyes that are commonly present in Redwood or Cedar.

SEMI-TRANSPARENT - Use no primer with this product. Although some bleeding may occur on Redwood and Cedar, it will soon blend in with the overall weathered look of this product.

PREVIOUSLY PAINTED WOOD - Previously painted or stained wood may be recoated provided the surface has been completely sanded to a dull finish before application. It is suggested that on previously painted surfaces a sample area be tested for color determination only.

STAIN PREPARATION: Stir stain thoroughly and make sure all pigments are in suspension. Under normal conditions no thinning should be necessary. If thinning is desired, use clean water. All tinted material should be inter-mixed to insure color uniformity from can to can.

Application: Apply one or two coats by brush, roller, or spray. During application maintain a wet edge to guard against lap marks. If two coats are desired, the first coat should be allowed to dry a minimum of 2 hours under normal drying conditions. One coat dry times are from 1 to 3 hours, but always allow at least 2 hours between coats. Never apply below 50° F.

CLEAN-UP: Clean water and mild detergent.

TINT-BASES: Many additional colors are available with the use of tint bases.

STORAGE AND DISPOSAL

[Household]

STORAGE: Close container after each use and do not store at temperatures below 32°F.

DISPOSAL: Do not reuse container. Securely wrap original container in several layers of newspaper and discard in trash.

[Commercial]

STORAGE: Close container after each use and do not store at temperatures below 32°F.

PESTICIDE DISPOSAL: Do not contaminate water, food, or feed by storage or disposal. Wastes resulting from the use of this product may be disposed of at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

BEST COPY AVAILABLE

January 14, 1993

5