


54734-2

PM 21 1062

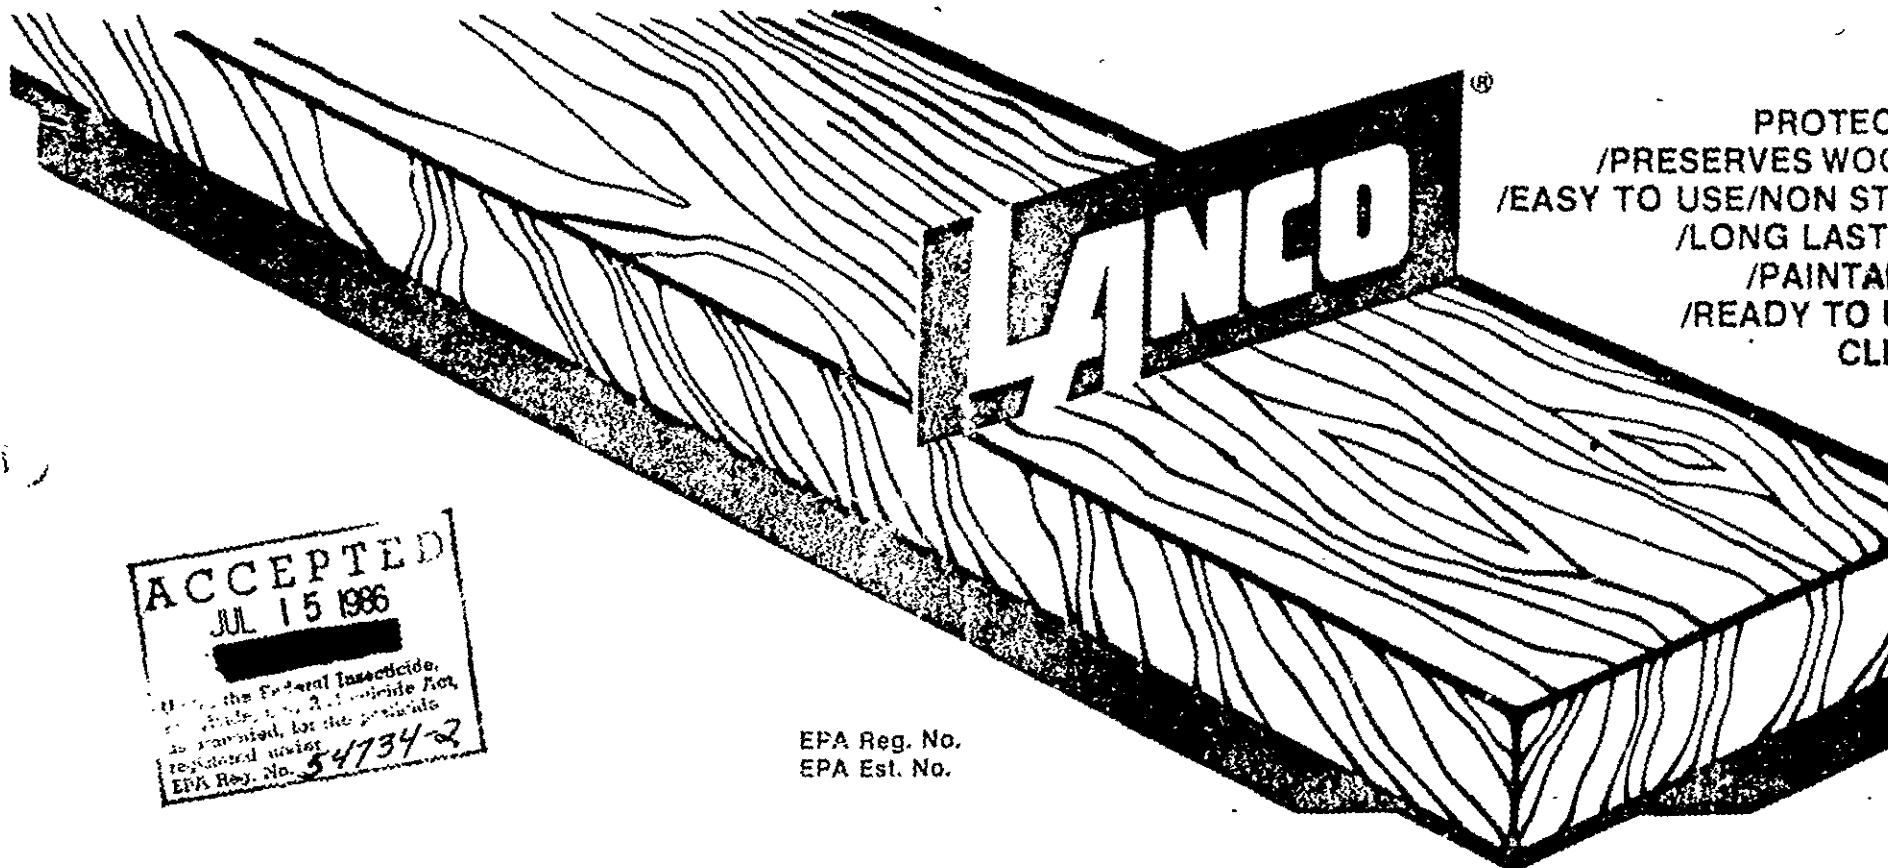

PROTECT
 /PRESERVES WOOD
 /EASY TO USE/NON STAINING
 /LONG LASTING
 /PAINTABLE
 /READY TO USE
 CLEAN

ACCEPTED
 JUL 15 1986
 Under the Federal Insecticide,
 Fungicide, and Rodenticide Act,
 as amended, for the pesticide
 registered under
 EPA Reg. No. 54734-2

EPA Reg. No.
 EPA Est. No.

ACTIVE INGREDIENT:
 Zinc naphthenate*15.7%
 INERT INGREDIENTS84.3%
 TOTAL100.0%

*Equivalent to 2% Zinc Metal)

PRODUCT WEIGHT PER GALLON

1 US GALLONS
 (3.785 LITERS)


Protecto-Zin

WOOD PRESERVATIVE • WATER REPELLENT
 Prevents: Woodrot, Termites, Fungal Rot

KEEP OUT OF REACH OF CHILDREN

CAUTION
COMBUSTIBLE

See other precautionary statements on back panel.




PROTECTO ZINC
Water Repellent
Wood Preservative



Preserve and protect all type of unpainted wood surface, lumber, rope, funnel, etc.



Penetrates the pores and wood cells, filling them with zinc, preventing termites.



Paintable non staining
tar or creosote

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION

FIRST AID PROCEDURE

Harmful if swallowed or absorbed through skin. Avoid contact with eyes, on skin or on clothing. Wash thoroughly after handling.

IF SWALLOWED, Do not induce vomiting, CALL PHYSICIAN IMMEDIATELY. — IF ABSORBED THROUGH SKIN, Wash thoroughly with soap and water. — IF IN EYES, Flush with plenty of water and get immediate medical attention. — CONTAMINATED CLOTHING should be removed and washed thoroughly before reusing.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on the label.

PHYSICAL OR CHEMICAL HAZARDS

Use only with adequate ventilation. Close container after each use. Do not use, pour, spill or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Do not use empty container. Wrap container and put into trash collection.

INSECT CONTROL CLAIMS

Protects wood against attack by termites.

FUNGICIDAL ACTIVITY

Protects and preserves wood against mold, mildew, rot, and mildew stain.

NOTES TO USER

Do not apply over painted or varnished surfaces. Do not apply over bark.

Do not use on wood intended for food, feed, potable water, livestock or dairy animals contact surfaces.

May injure living plants during application. Cover plants to protect against direct contact.

APPLICATION

Can be used to preserve both interior and exterior wood. Interior use wood rot protection is only needed when wood is subject to frequent or prolonged wetting (e.g.) condensation or rainsee page. Can be used for above ground contact and below ground uses. Below ground or ground contact use requires minimum 5 minutes dip. For even further protection dip for one hour. Wood to be treated should be dry and well seasoned. Fence posts must have bark removed. For fence posts, finished timbers to be buried in soil, immersion for 12-24 hours provides long term protection (pine species may be adequately penetrated in 8-18 hours). Cul timber should be immersed 15-30 minutes per inch on thickness, except in case of pine species which absorbs the preservative at a rate of 1-1.5 hours. For above ground use, apply two brush coats or dip for 3 minutes per inch of thickness. All wood should be treated after all cuts are made and before use in the structure.

FABRIC AND CORDAGE PROTECTION

Can be used to protect and preserve fabric against mildew, mold and fabric destroying and staining fungus, including rope, fish net, twine, canvas burlap and other fabrics. Materials should be thoroughly saturated until wet and air dried before use. Material can be either sprayed or dipped for complete saturation. Treats approximately 75 square feet fabric per gallon. Do not use on fabric intended for food or for contact surfaces or clothing. No for use on fabric or cordage in ground contact situations.

WOOD PRESERVATIVE USES

Protects the following types of wood: shingles millwork windows, outdoor furniture, docks, piers posts, paint block, flooring, staking materials, decks, spars, house siding. Protects wood in all the above applications including nurse lumber, slats and beehive crates.

PHYSICAL PROTECTION

Inhibits warping, shrinking, swelling, checking cracks, water marking of the wood. Can be painted after drying for hours. For wood containing resin and other materials weathering will enhance paint adhesion. This colorfast product offers a penetrating fungicide which will not block.

COVERAGE

100-300 square feet - depending on porosity or wood, method of application.

LANCO

Mfg. Corp. San Lorenzo, Puerto Rico (USA)
Tels. (809) 736-4221 • 736-5721

2 of 2