

300 175832 10F7  
17 1 Pm21  
54774-1

Registration Consulting Associates  
12184 Woodland Court (LOP)  
Auburn, CA 95603

JUN 24 1986

Attention: Mr. C.C. Yeager

Gentlemen:

Subject: Trenton Creosote Oil  
EPA Registration No. 54774-1  
Your Submissions Dated April 1 and May 6, 1986

The labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, is acceptable subject to the comments listed below. Five copies of the finished labeling must be submitted.

1. Make the following label revisions:
  - a. Under "Statement of Practical Treatment" add, If inhaled:  
Remove victim to fresh air. Get medical attention.
  - b. Information included under "Instructions for treating wood" must be incorporated under "Directions for Use."
2. The new source of technical grade product is accepted, as you have certified that the product conforms with American Wood Preserver's Association standards.
3. The Consumer Information sheet (Product Bulletin) and the updated Confidential Statement of Formula have been added to our files.

Sincerely yours,



Henry M. Jacoby  
Product Manager (21)  
Fungicide-Herbicide Branch  
Registration Division (TS-767C)

86745: Jackson: J-10: KENCO: 6/18/86: 6/24/86: DKD: JH

CONCURRENCES							
SYMBOL ▶							
SURNAME ▶							
DATE ▶							

**RESTRICTED USE PESTICIDE**

For sale to and use only by certified applicators or by persons under supervision and only for those uses covered by the certified applicator's

# TRENTON CREOSO

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

## DANGER

**Corrosive:** Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Harmful or fatal if swallowed.

Individuals must wear gloves impervious to the wood treatment formulation in all situations where dermal contact with Creosote is expected (e.g., handling freshly treated wood and manually opening cylinder doors).

Individuals who manually open cylinder doors must wear gloves and a respirator.

Individuals who enter pressure treatment cylinders and other related equipment that is contaminated with the wood treatment formulation (e.g., cylinders that are in operation or are not free of the treatment formulation) must wear protective clothing (including overalls, jacket, gloves and boots) impervious to the wood treatment formulation and a respirator.

Applicators must not eat, drink, or use tobacco products during those parts of the application process that may expose them to the wood treatment formulation (e.g., manually opening/closing cylinder doors, moving trams out of cylinders, mixing chemicals, and handling freshly treated wood).

Wash thoroughly after skin contact, and before eating, drinking, use of tobacco products, or using restrooms.

Protection clothing must be changed when it shows signs of contamination. Applicators must leave protective clothing and work shoes or boots and equipment at the plant. Worn-out protective clothing, workshoes or boots must be left at the plant and disposed of in any general landfill, in the trash, or any other manner approved for pesticide disposal.

**Note to User:** As used on this label, the term "respirators" means properly fitting, well-maintained, half-mask canister or cartridge respirators which are MSHA/NIOSH-approved for polynuclear aromatics and organic vapors. Example of acceptable materials for protective clothing (e.g., gloves, overalls, jackets, and boots) required during application and handling of Creosote are polyvinyl acetate (PVA), polyvinyl chloride (PVC), neoprene, and NBR (Buta N).

## ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not use this product to treat wood intended to be used where it may come into direct or indirect contact with public drinking water, or drinking water for domestic animals or livestock, except for those uses involving incidental contact such as docks and bridges.

## PHYSICAL AND CHEMICAL HAZARDS

This product will burn. Do not use, pour or spill near heat or open flame. This product has a strong odor. Do not use where odor may penetrate to cause any odor problems.

Keep from freezing while in storage. If exposed to temperatures below 40°F., may settle out.

A Wood Preservative for the Preservation of Lumber Against Decay, Rot and Wood-Boring Insects

Active Ingredient:

Coal Tar Creosote .....

FOR COMMERCIAL USE ONLY

Keep Out of Reach of Children

## DANGER

Statement of Practical Treatment

**For Eyes:** In case of contact with eyes, flush with water immediately for at least 15 minutes and consult a physician.

**For Skin:** Wash exposed areas of skin with soap and warm water after handling or using.

**If Swallowed:** Do not induce vomiting. Consult a physician immediately.

**Note:** Remove and wash contaminated clothing before reuse or discard in accordance with label instructions for pesticide container disposal.

See Side Panel for Additional Precautions

EPA Reg. No. 54774

EPA Est. No. \_\_\_\_\_

Net Contents: \_\_\_\_\_

Trenton Sales, Inc.  
P.O. Box 8408 - Suite 100  
Houston, TX 77288  
Telephone: (713) 861-1111

**RESTRICTED USE PESTICIDE**

For sale to and use only by  
supervision and only for the

certified applicators or by persons under their direct  
uses covered by the certified applicator's certification.

3057

# TRENTON CREOSOTE OIL

## STATEMENTS

HUMANS AND

ANIMALS

## GER

1. Do not get in eyes, on skin or on clothing. Harm-

wood treatment formulation in all situations where  
handling freshly treated wood and manually open-

must wear gloves and a respirator.

s and other related equipment that is contaminated  
rs that are in operation or are not free of the treat-  
including overalls, jacket, gloves and boots) imper-  
respirator.

products during those parts of the application pro-  
formulation (e.g., manually opening/closing cylinder  
chemicals, and handling freshly treated wood).

eating, drinking, use of tobacco products, or using

ows signs of contamination. Applicators must leave  
equipment at the plant. Worn-out protective clothing  
and disposed of in any general landfill, in the trash,  
disposal.

respirators" means properly fitting, well-maintained,  
re MSHA/NIOSH-approved for polynuclear aromatics  
materials for protective clothing (e.g., gloves, overalls,  
and handling of Creosote are polyvinyl acetate (PVA),  
Buna N).

## NTAL HAZARDS

1 apply directly to water. Do not contaminate water  
1. Do not use this product to treat wood intended to  
t contact with public drinking water, or drinking water  
se uses involving incidental contact such as docks

## CHEMICAL HAZARDS

near heat or open flame. This product has a strong  
cause any odor problems.  
to temperatures below 40°F., may settle out.

A Wood Preservative for the Preservation of Unpainted  
Lumber Against Decay, Rot and Wood Borers.

Active Ingredient:

Coal Tar Creosote . . . . . 100%

FOR COMMERCIAL USE ONLY

Keep Out of Reach of Children

**DANGER**

Statement of Practical Treatment

For Eyes: In case of contact with eyes, flush with plenty  
of water immediately for at least 15 minutes. Call a  
physician.

For Skin: Wash exposed areas of skin with soap and  
warm water after handling or using.

If Swallowed: Do not induce vomiting. Call a physician  
immediately.

Note: Remove and wash contaminated clothing before  
reuse or discard in accordance with instructions for  
pesticide container disposal.

See Side Panel for Additional Precautionary Statements

EPA Reg. No. 54774-1

EPA Est. No. \_\_\_\_\_

Net Contents: \_\_\_\_\_ U.S. Gallons

Trenton Sales, Inc.  
P.O. Box 8406 - Suite 307  
Houston, TX 77288  
Telephone: (713) 861-8285

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act,  
as amended, for the  
registered under EPA Reg. No.

JUN 24 1986

54774-1

## DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a  
manner inconsistent with its labeling.

## STORAGE AND DISPOSAL

Pesticide wastes are toxic. Improper disposal of  
excess pesticide, spray mixture, or rinsate is a  
violation of Federal law. If these wastes cannot  
be disposed of by use according to label instruc-  
tions, contact your State Pesticide or Environmen-  
tal Control Agency, or the Hazardous Waste  
representative at the nearest EPA Regional Of-  
fice for guidance.

Container Disposal: Reseal cap, and return to  
manufacturer.

## INSTRUCTIONS FOR TREATING WOOD

Regardless of the type of pressure treatment used, the  
normal retention required for Creosote is from 6 to 12  
lbs. per cubic foot. It is important to remember that dry  
wood is satisfactorily treated by the pressure pro-  
cess. Unseasoned wood should first be steam-  
conditioned, followed by a 1-3 hr. vacuum period, by  
vapor drying, where the vapors are condensed on the  
surfaces, or by Boultonizing where wood is heated in  
Creosote while under vacuum.

Note: Creosote may not be used on wood that is in-  
tended for interior use except for those support struc-  
tures (e.g., foundation timbers, pole supports and the  
bottom six inches of stall skirtboards) which are in con-  
tact with the soil in barns, stables and similar sites.

Creosote may not be used on wood in a manner which  
may result in direct exposure to domestic animals or  
livestock or in the contamination of food, feed, or drink-  
ing and irrigation water (e.g., irrigation flumes, water-  
ing troughs, feed lot bins and vegetable stakes).

JUN 24 1986

54774-1

## CREOSOTE PRESSURE TREATED WOOD

### CONSUMER INFORMATION

This wood has been preserved by pressure treatment with an EPA-registered pesticide containing creosote to protect it from insect attack and decay. Wood treated with creosote should be used only where such protection is important.

Creosote penetrates deeply into and remains in the pressure-treated wood for a long time. Exposure to creosote may present certain hazards. Therefore, the following precautions should be taken both when handling the treated wood and in determining where to use the treated wood.

### USE SITE PRECAUTIONS FOR CREOSOTE PRESSURE-TREATED WOOD

Wood treated with creosote should not be used where it will be in frequent or prolonged contact with bare skin (for example, chairs and other outdoor furniture) unless an effective sealer has been applied.

Creosote-treated wood should not be used in residential interiors. Creosote-treated wood in interiors of industrial buildings should be used only for industrial building components which are in ground contact and are subject to decay or insect infestation and wood block flooring. For such uses, two coats of an appropriate sealer must be applied. Sealers may be applied at the installation site.


Wood treated with creosote should not be used in the interiors of farm buildings where there may be direct contact with domestic animals or livestock which may crib (bite) or lick the wood.

In interiors of farm buildings where domestic animals or livestock are unlikely to crib (bite) or lick the wood, creosote-treated wood may be used for building components which are in ground contact and are subject to decay or insect infestation if two coats of an effective sealer are applied. Sealers may be applied at the installation site.

Do not use creosote treated wood for farrowing or brooding facilities.

Do not use treated wood under circumstances where the preservative may become a component of food or animal feed. Examples of such use would be structures or containers for storing silage or food.

Do not use treated wood for cutting-boards or countertops.

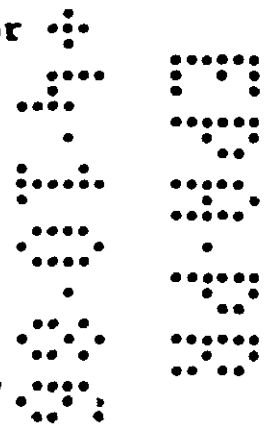

Only treated wood that is visibly clean and free of surface residues should be used for patios, decks and walkways.


Do not use treated wood for construction of those portions of beehives which may come into contact with the honey.

Creosote-treated wood should not be used where it may come into direct or indirect contact with public drinking water, except for uses involving incidental contact such as docks and bridges.

Do not use creosote-treated wood where it may come into direct or indirect contact with drinking water for domestic animals or livestock, except for uses involving incidental contact such as docks and bridges.

HANDLING PRECAUTIONS FOR CREOSOTE  
PRESSURE-TREATED WOOD

Dispose of treated wood by ordinary trash collection or burial. Treated wood should not be burned in open fires or in stoves, fireplaces, or residential boilers, because toxic chemicals may be produced as part of the smoke and ashes. Treated wood from commercial or industrial use (e.g., construction sites) may be burned only in commercial or industrial incinerators or boilers in accordance with state and Federal regulations.

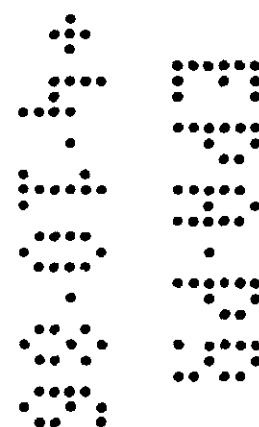

Avoid frequent or prolonged inhalation of sawdust from treated wood. When sawing and machining treated wood, wear a dust mask. Whenever possible, these operations should be performed outdoors to avoid indoor accumulations of airborne sawdust from treated wood.


Avoid frequent or prolonged skin contact with creosote-treated wood; when handling the treated wood, wear long-sleeved shirts and long pants and use gloves impervious to the chemicals (for example, gloves that are vinyl-coated).

When power-sawing and machining, wear goggles to protect eyes from flying particles.

After working with the wood, and before eating, drinking, and use of tobacco products, wash exposed areas thoroughly.

If oily preservative or sawdust accumulate on clothes, launder before reuse. Wash work clothes separately from other household clothing.

Coal tar pitch and coal tar pitch emulsion are effective sealers for creosote-treated wood-block flooring. Urethane, epoxy, and shellac are acceptable sealers for all creosote-treated wood.

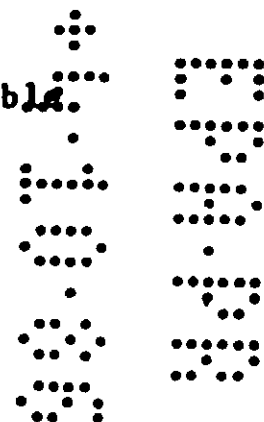

Avoid frequent or prolonged inhalation of sawdust from treated wood. When sawing and machining treated wood, wear a dust mask. Whenever possible, these operations should be performed outdoors to avoid indoor accumulations of airborne sawdust from treated wood.

Avoid frequent or prolonged skin contact with creosote-treated wood; when handling the treated wood, wear long-sleeved shirts and long pants and use gloves impervious to the chemicals (for example, gloves that are vinyl-coated).

When power-sawing and machining, wear goggles to protect eyes from flying particles.

After working with the wood, and before eating, drinking, and use of tobacco products, wash exposed areas thoroughly.

If oily preservative or sawdust accumulate on clothes, launder before reuse. Wash work clothes separately from other household clothing.

Coal tar pitch and coal tar pitch emulsion are effective sealers for creosote-treated wood-block flooring. Urethane, epoxy, and shellac are acceptable sealers for all creosote-treated wood.



**RESTRICTED USE PESTICIDE**

For sale to and use only by certified applicators or by persons under their supervision and only for those uses covered by the certified applicator's certificate.

# TRENTON CREOSOTE

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

## DANGER

**Corrosive:** Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Harmful or fatal if swallowed.

Individuals must wear gloves impervious to the wood treatment formulation in all situations where dermal contact with Creosote is expected (e.g., handling freshly treated wood and manually opening cylinder doors).

Individuals who manually open cylinder doors must wear gloves and a respirator.

Individuals who enter pressure treatment cylinders and other related equipment that is contaminated with the wood treatment formulation (e.g., cylinders that are in operation or are not free of the treatment formulation) must wear protective clothing (including overalls, jacket, gloves and boots) impervious to the wood treatment formulation and a respirator.

Applicators must not eat, drink, or use tobacco products during those parts of the application process that may expose them to the wood treatment formulation (e.g., manually opening/closing cylinder doors, moving trams out of cylinders, mixing chemicals, and handling freshly treated wood).

Wash thoroughly after skin contact, and before eating, drinking, use of tobacco products, or using restrooms.

Protection clothing must be changed when it shows signs of contamination. Applicators must leave protective clothing and work shoes or boots and equipment at the plant. Worn-out protective clothing, workshoes or boots must be left at the plant and disposed of in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

**Note to User:** As used on this label, the term "respirators" means properly fitting, well-maintained, half-mask canister or cartridge respirators which are MSHA/NIOSH-approved for polynuclear aromatics and organic vapors. Example of acceptable materials for protective clothing (e.g., gloves, overalls, jackets, and boots) required during application and handling of Creosote are polyvinyl acetate (PVA), polyvinyl chloride (PVC), neoprene, and NBR (Buna N).

## ENVIRONMENTAL HAZARDS

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not use this product to treat wood intended to be used where it may come into direct or indirect contact with public drinking water, or drinking water for domestic animals or livestock, except for those uses involving incidental contact such as docks and bridges.

## PHYSICAL AND CHEMICAL HAZARDS

This product will burn. Do not use, pour or spill near heat or open flame. This product has a strong odor. Do not use where odor may penetrate to cause any odor problems.

Keep from freezing while in storage. If exposed to temperatures below 40°F., may settle out.

A Wood Preservative for the Preservation of Lumber Against Decay, Rot and Wood Bore

### Active Ingredient:

Coal Tar Creosote .....

FOR COMMERCIAL USE ONLY

Keep Out of Reach of Children

## DANGER

### Statement of Practical Treatment

**For Eyes:** In case of contact with eyes, flush with water immediately for at least 15 minutes and consult a physician.

**For Skin:** Wash exposed areas of skin with warm water after handling or using.

**If Swallowed:** Do not induce vomiting. Call a physician immediately.

**Note:** Remove and wash contaminated clothing before reuse or discard in accordance with instructions for pesticide container disposal.

See Side Panel for Additional Precautions

EPA Reg. No. 54774-1

EPA Est. No. \_\_\_\_\_

Net Contents: \_\_\_\_\_ U.S. G.

Trenton Sales, Inc.  
P.O. Box 8406 - Suite 307  
Houston, TX 77288  
Telephone: (713) 861-8285