X-100 NATURAL SEAL


Used by professionals for Building Restoration & Preservation

X-100 Natural Seal is a waterproof coating formulated with fungicide. Protects against fungal attack, mold & mildew. Termites avoid it. For use on cedar wood, wood surfaces, vertical wood and other surfaces susceptible to moisture damage. DO NOT USE ON WOOD THAT WILL BE IN DIRECT CONTACT WITH SOIL. TEST FOR COLOR COMPATIBILITY BEFORE APPLYING TO BRICK. MASONRY, CONCRETE OR LIMESTONE. ALLOW TEST SAMPLE TO DRY, THEN INSPECT. Hairline cracks are sealed by the solids which penetrate deep and actually plug these problem areas. As Natural Seal ages, it migrates inward to create a lasting protective seal. PROTECTS by eliminating moisture penetration which causes costly damage and repairs. PRESERVES by retarding disintegration from moisture freeze-thaw cycles which cause surface damage. BEAUTIFIES by helping protect against efflorescences and surface stairs. INSUL-ATES by sealing out moisture, making it possible to retain the full insulation value of the wood. Provides excellent protection after restoration from acid rain. water damage, ultra-violet rays, sulfphuric acid, salt, fungus, and wood rot.

FINISH	CLEAR	SUGGESTIONS:
AVERAGE COVERAGE	Depending on density of surface 25 to 50 Sq. Ft. per Qt.	 When Spraying near vegetation cover any plant life in case of overspray
DRY TIME	24:48 hours for a single coat. Allow to dry at least 48 hours before applying second coat.	
		 Before treating surface make sure surface or material is thoroughly dry
THINNER	None required	 If Natural Seal should get on surfaces such as grass, metal or paint remove with Paint Thinner
APPLICATION	Brush roller or spray	
PRIMER	None	
CLEAN UP	Paint Thinner	
ACTIVE INGRE Methylene b	is (thiocyanate)	.59
2-(Thiocyano	omethylthio) benzothia	IZOI O
	PIENTSproduct weights 8 poun	
KEEP	OUT OF REACH OF	FCHILDREN

KEEP OUT OF REACH OF CHILDREN WARNING

COMBUSTIBLE
CONTAINS PETROLEUM DISTILLATE
HARMFUL OR FATAL IF SWALLOWED

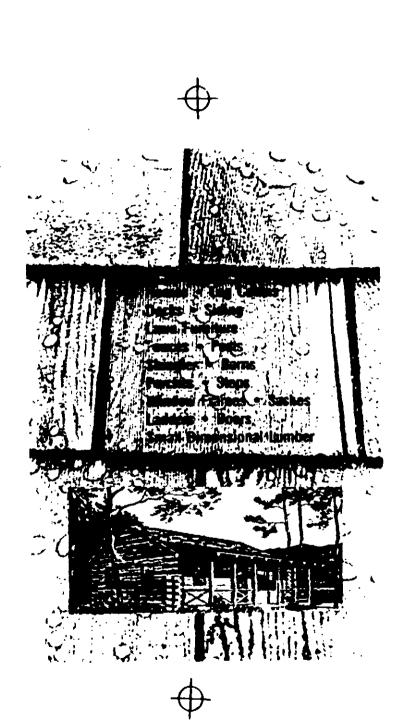

Building Research

Waterproofs



Prevents Moistu FUNGICIDE COATING P MOLD, MIL FOR USE ON • W

> WARI HARMFUL See

Used by Professionals for
Building Restoration & Preservation

X-100

Natural Seal

Waterproofs and Holds Natural Color



Prevents Moisture Damage – Holds Natural Color FUNGICIDE COATING PROTECTS THE WOOD FROM FUNGAL ATTACK MOLD, MILDEW. AND TERMITES AVOID IT

FOR USE ON

- Wood Shingles
 - Wood Decks
 - Masonite

And other porous wood surfaces.

WARNING! combustible! HARMFUL OR FATAL IF SWALLOWED.

See Other Cautions on Side Panel CONTENTS THIS CONTAINER ()

_ 1 Gallon __ 5 Gallons DOT UN 1255 JAN 24 1989

Will the Federal Intention for the Control of Acts of Act

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling Harmful if swallowed or absorbed through skin. Avoid breathing vapors or mist. This product may cause skin sensitization.

STATEMENT OF PRACTICAL TREATMENT: In case of skin contact, wash promptly and thoroughly with soap and water. If product gets in eyes, flush immediately with copious amounts of clean cool water for 15 to 20 minutes. Get medical altention immediately. If product is swallowed, call physician. Poison Control Center. Drink a large quantity of milk-legg whites, or getatin solution or if these are not available drink large quantities of water. Avoid alcohol.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatury shock, respiratory depression, and convulsion may be needed.

ENVIRONMENTAL HAZARDS. This posticide is loxic to fish. Do not apply directly to water. Permits may be required for discharges containing this pesticide into lakes streams ponds or public water. For guidance, contact the regional office of the Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS. Do not use or store near heat or open frame

STORAGE OR DISTOSAL

STORAGE: Keep container closed when not in use. Store in cool place teaking or damaged containers should be placed in a plastic bag and discarded in trash. All pesticides should be kept nut of reach of children and stored away from food.

DISPOSAL: Do not reuse empty can. Wrap can and place in trasf.

NOTE: For large projects, check with manufacturer for video training film of "Basic Uses" for all our products.

For technical assistance call
AMERICAN BUILDING RESTORATION
CHEMICALS, INC.
9720 South 60th Street, Franklin, Wisconsin 53132
(414) 761-2440
EPS Est # 56156-WI 001
EPA Reg # ____