



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF
PREVENTION, PESTICIDES
AND TOXIC SUBSTANCES

January 22, 2008

Juli Mann
American Building Restoration Products, Inc.
9720 South 60th Street
Franklin, WI 53132-8644

Subject: **X-100 Natural Seal**
EPA Registration No.: 56156-1
Application Date: December 11, 2007
Receipt Date: December 11, 2007

Dear Ms. Mann:

The following labeling, submitted in connection with registration under section of the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended, is acceptable.

Proposed Action:

- Minor Label Change

General Comment:

Note that a copy of this labeling for future amendments may be submitted electronically for review and acceptance.

A stamped copy of the label is enclosed.

Should you have any questions concerning this letter, you may contact me by telephone at (703) 308-6422 or by e-mail at heyward.adam@epamail.epa.gov or Stacey Grigsby by telephone at (703) 305-6440 or by email at grigsby.stacey@epamail.epa.gov during the hours of 8:00 am to 4:00 pm EST. When submitting information or data in response to this letter, a copy of this letter should accompany the submission to facilitate processing.

Sincerely,

A handwritten signature in black ink that reads "Adam Heyward".

Adam Heyward
Product Manager (34)
Regulatory Management Branch II
Antimicrobials Division (7510P)


Enclosure: (stamped labeling)



Restoring the Old, Preserving the New.

EST. 1970

X-100 NATURAL SEAL®

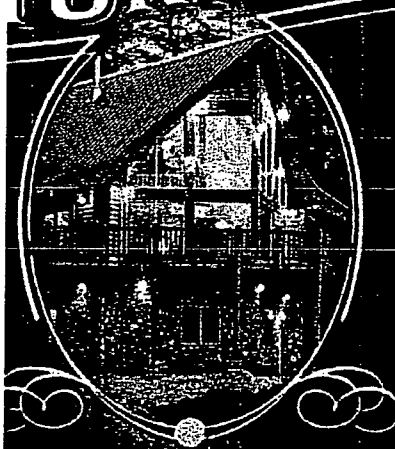

Wood Preservative

ACTIVE INGREDIENTS:


Methylene bis (thiocyanate)	0.5%
2-(thiocyanomethylthio) benzothiazole	0.5%
INERT INGREDIENTS	99.0%

TOTAL: 100%

Contains petroleum distillate

1300B Clear

U.S. Gallon / 3.785 Liters

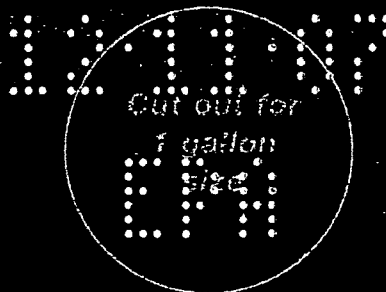

Preserves and protects...

- Wood siding
- Rough sawn and smooth cedar
- Fences
- Wood shingles
- Split shake roofs
- Decking

...against rot and decay while accentuating the woods natural color.

X-100 Natural Seal® Wood Preservative formula is an oil based wood preservative consisting of essential wood protecting ingredients. **X-100 Natural Seal® Wood Preservative** is designed to penetrate the wood, protecting against cracking, splitting, cupping, curling, sap stain, mold and mildew and against the environmental forces of wind, rain, snow, ice and sun. **X-100 Natural Seal® Wood Preservative** is E.P.A. registered.

X-100 Natural Seal® Wood Preservative is for use on all wood surfaces susceptible to moisture damage including cedar, redwood, pine, plywood, T1-11, cypress, fir, dimensional lumber, siding, decking, logs and roofs. **X-100 Natural Seal® Wood Preservative** is available in transparent and semi-transparent stains.

PROPER SURFACE PREPARATION

To achieve the maximum effectiveness of this product the surface must be cleaned of dirt, mildew, loose wood fibers, chalky residue, foreign matter and must be dry.

NEW WOOD

Surface must be dry. Remove mill glaze/shiny lumber, tannic acid bleed, rust stains from fasteners, weathered grey and dirty wood with **X-180 Weathered Wood Restorer™**.

EXISTING COATING (other than X-100 finishes)

Strip the existing finish with **Super Blo Strip™** or other appropriate ABRP, Inc. coatings remover. *NOTE:* Before beginning removal process test to determine removal product suitability, dwell time and dilution ratio if applicable. After stripping is completed, clean with **X-180 Weathered Wood Restorer™**. Failure to remove the existing coating will cause unsatisfactory finish results. Removal of the existing coating by methods other than what is specified may produce unsatisfactory finish results.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Mix **X-100 Natural Seal® Wood Preservative** well before using. A test area should be performed before beginning overall project to determine the amount of **X-100 Natural Seal® Wood Preservative** the wood will absorb, dry time, wood porosity and total desired look.

Fully protect all adjacent surfaces, as well as; general work area. When spraying near vegetation, cover plant life with cardboard or other suitable material in case of overspray.

FOR BEST RESULTS AND OPTIMAL PENETRATION: APPLY TO DRY WOOD. DO NOT APPLY IF RAIN IS IMMEDIATELY FORECASTED. BOTH SURFACE AND AIR TEMPERATURE MUST BE ABOVE 50°F.

LIMITED WARRANTY: This warranty is valid for one year from the date of purchase. The purchaser of X-100 Natural Seal® Wood Preservative shall be held to be defective: ABRP, Inc., at its option, will either replace the product or refund the purchase price. Contact ABRP, Inc., to make claim under this warranty. Label and the original sales receipt. Proper surface preparation is essential to the applicability of this warranty. Read and follow label directions. ABRP, Inc. is not liable for indirect damage arising from the use of this product or the cost of labor involved in its application. Seller makes no warranty, expressed or implied, concerning the label. Buyer assumes all risk of use and/or handling of this material when such use and/or handling is contrary to label instructions. No other warranty, limitation warranties as to MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In all events, ABRP, Inc.'s liability shall be limited solely to replacement of the product. This warranty may not be modified or extended by manufacturer's representatives, distributors or dealers of ABRP, Inc.'s products. Some states do not allow the limitation of damages so the above limitation or exclusion may not apply to the purchaser. This warranty gives the purchaser specific legal rights, as well as rights which may vary by state.

Helpful Hints: When a natural cedar color is desired and to ensure further color fastness use **X-100 Natural Seal® Cedar Tone Gold**. For further protection, apply **X-100 Natural Seal®** on all sides of the wood. If the application has to be interrupted, stop at a corner as opposed to the middle of the wall.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

CLEAN UP: Use mineral spirits or dish detergent and water. If **X-100 Natural Seal®** should get on surfaces such as glass, paint, metal, caulking or rubber, remove immediately with dish detergent. If a spill is dry, clean with mineral spirits.

PESTICIDE STORAGE: Keep container closed when not in use. Store in a cool place. This product should be stored away from food.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse container. Do not reuse empty container. Leaking or damaged containers should be placed in a plastic bag and discarded. Contact federal, state and/or local agencies to ensure compliance with proper disposal methods and respective regulations.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER

Corrosive: Causes irreversible eye damage or skin burns. May be fatal if swallowed, absorbed through skin or inhaled. Do not get in eyes, on skin or on clothing. Do not breathe spray mist. Wear goggles or face shield (safety glasses). Wear protective clothing (long-sleeve shirt and long pants, socks plus shoes and chemical-resistant gloves such as water proof gloves). Wash hands before eating, drinking, chewing gum, using tobacco or using the toilet. Remove contaminated clothing and wash clothing before reuse. Prolonged or frequently repeated skin contact may cause allergic reaction in some individuals.

Environmental Hazards: This product is toxic to fish. Do not apply directly to water, to areas where surface water is present or to intertidal areas below the mean high water mark. Do not use on wood that will be in direct contact with soil. Do not contaminate water when cleaning equipment or disposing of equipment washwaters.

USE ONLY WITH ADEQUATE VENTILATION

DANGER: This product may cause eye damage and skin irritation upon contact. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield, rubber gloves and protective clothing when handling. Harmful or fatal if swallowed. Harmful if absorbed through the skin. Avoid breathing vapors or mist.

PERSONAL PROTECTIVE EQUIPMENT

Mixers, loaders, applicators and other handlers must wear:

- Coveralls over long-sleeved shirt and long pants
- Socks and chemical-resistant footwear
- Goggles or face shield
- Chemical-resistant apron
- Chemical-resistant gloves (such as barrier laminate, butyl rubber, nitrile rubber, viton)
- A non-powered air-purifying respirator equipped with an organic vapor (OV) removing cartridge or canister plus an N-, R-, or P-series filter.

PHYSICAL OR CHEMICAL HAZARDS

Combustible. Do not store this product near heat or open flame. Keep away from heat, sparks and flame.

Note: Rags, steel wool, or other waste soaked with this product may spontaneously catch fire if improperly discarded.

ACCEPTED


JAN 22 2008

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, the pesticide, registered under EPA Reg. No. 56156-1

BATCH NO.

Copyright © 2007 American Building Restoration Products, Inc. X-07/KXM

UPC
0 9895713001 7

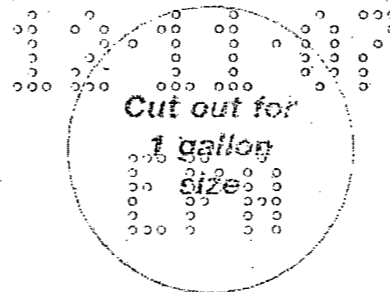

FIRST AID	
IF IN EYES	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
IF ON SKIN OR CLOTHING	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
IF SWALLOWED	<ul style="list-style-type: none"> • Call a poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by the poison control center or doctor.
IF INHALED	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.

Have product container or label with you when calling a poison control center or doctor, or going for treatment.

NOTE TO PHYSICIAN

Contains Petroleum distillate - vomiting may cause aspiration pneumonia.

For Chemical Emergency ONLY, call Chemtrec at 1-800-424-9300.

For ALL other inquiries about this product, call 1-800-346-7532

USER SAFETY RECOMMENDATIONS

Users should wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Users should remove clothing immediately if pesticide gets inside. Discard clothing or other absorbent materials that have been drenched or heavily contaminated with this product's concentrate. Do not reuse them. Then wash thoroughly and put on clean clothing. User should remove personal protective equipment immediately after handling this product. Wash outside of gloves before removing. As soon as possible wash thoroughly and change into clean clothing. Do not apply this product in a way that will contact any person or pet.

This product may cause skin sensitization reactions in some people.

For more information on the specialty line of products offered by ABRP, Inc. please contact one of our technical representatives at 800-346-7532 or visit our web site at abrp.com.

Manufactured by:



American Building Restoration Products, Inc.

9720 South 60th Street, Franklin, Wisconsin 53132

414-421-4125 • Fax: 414-421-8696 • 1-800-346-7532 • www.abrp.com

E.P.A. Registration No. 56156-1 E.P.A. Establishment No. 56156-WI-01

American Building Restoration



X-NATURAL

Wood Protection

DANGER!

Combustible liquid and vapor
Keep out of the reach of children
See other cautions on side panel

1300

1 U.S. Gallon

3 8 3