

(DRAFT LABEL)

(REVISED 10-05-87)

BRITEWOOD S**SAPSTAIN CONTROL FOR FRESH CUT LUMBER**

Protects lumber in storage or transit from discoloration and/or deterioration due to the effects of sapstain and mold.

ACTIVE INGREDIENTS: Sodium Ortho-Phenylphenate23.0%
INERT INGREDIENTS:77.0%

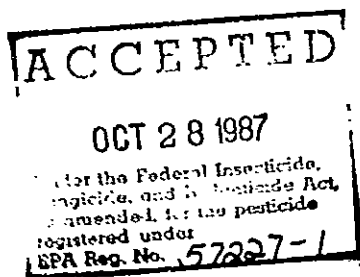
DANGER**KEEP OUT OF REACH OF CHILDREN**

CORROSIVE. Causes eye damage and skin irritation. Do not get in eyes, on skin or clothing. Goggles or face shield, rubber gloves and protective clothing should be worn when handling undiluted material. Harmful or fatal if swallowed.

FIRST AID MEASURES

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, get prompt medical attention. Remove and wash contaminated clothing before reuse.

If swallowed, DO NOT INDUCE VOMITING. Administer large quantities of water followed by fruit juice or dilute (5%) vinegar. Seek immediate medical attention.

FOR INDUSTRIAL AND COMMERCIAL USE ONLY

EPA Reg. No. 57227-_____
EPA Est. No. 57227-OR-001

Manufactured by
CONTECHEM INC.
Portland, OR, USA
(503) 224-3009



NET CONTENTS: _____

DISCLAIMER

The manufacturer and distributor make no warranty, express or implied, concerning the use of this product other than as directed on the label. The use of this product being beyond the control of the manufacturer or distributor, no warranty, express or implied, is made as to the effects of such or the results to be obtained if not used in accordance with directions or established safe practice. Upon acceptance of delivery of this product, the buyer assumes all responsibility, including injury or damage, resulting from its mis-use as such, or in combination with other materials.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

For the control of sapstain and mold on green or freshly cut lumber, BRITEWOOD S is generally effective when used as a 15 second dip at a concentration of 2 fluid ounces per gallon of water. For severe conditions of ambient temperature and humidity, BRITEWOOD S may be used at up to 4 fluid ounces per gallon of water in a dip tank or spray application so as to uniformly wet all surfaces of the wood. Green wood should be treated within twenty four hours of cutting or sawing.

In order to insure best results, the dipping tank must be protected from rain. The treated lumber should not be allowed to remain unprotected in heavy rains, especially just after treatment. Lumber piles should be roofed and adequate space should be left between boards and stacks. Green lumber should not be used for stickers.

STORAGE AND DISPOSAL

1. PROHIBITIONS: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.
2. PESTICIDE DISPOSAL: Wastes resulting from the use of this pesticide may be disposed of on site or at an approved waste disposal facility.
3. CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.
4. GENERAL: Consult federal, state or local disposal authorities for approved alternate methods.

BEST AVAILABLE COPY