

Reg no: 58502 - 1

PM-25

191

RIPENER I CONCENTRATE

FOR USE WITH ARCO ETHYLENE GENERATOR
TO PRODUCE ETHYLENE GAS TO ACCELERATE
RIPENING OF:

- BANANAS
- TOMATOES
- TOBACCO (Flue Cured Variety)

ACTIVE INGREDIENT	
Ethanol	90%
INERT INGREDIENTS	10%
TOTAL	100%

CONTAINS METHANOL
Not to be taken internally

KEEP OUT OF REACH OF CHILDREN
DANGER • POISON



STATEMENT OF PRACTICAL TREATMENT
Methanol may cause blindness. Harmful or fatal if swallowed. Vapor harmful. Avoid breathing spray, mist or vapors. Avoid contact with skin. Do not get in eyes.

IF SWALLOWED - Induce vomiting by touching the back of the throat with finger or blunt object. Get medical attention immediately.

IF IN EYES - Flush with water for at least 15 minutes. Get medical attention immediately. See other panel for additional Precautionary Statements.

PRODUCED AND DISTRIBUTED BY
ARCO AMERICAN RIPENER COMPANY, INC
Box 105 • 203 Pressley Road
Charlotte, N. C. 28217
(704) 338-2336
In N.C. (704) 327-4313

Net Contents (12 Fluid Ounces - 1 U.S. Quart)
PATENTS PENDING

**D
O
N
O
T
R
E
U
S
E
C
O
N
T
A
I
N
E
R**

DIRECTIONS FOR USE

FLAMMABLE

Keep away from heat and flame

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage, disposal or cleaning of equipment.

DO NOT REUSE EMPTY CONTAINER.

CONTAINER DISPOSAL:

Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill or incinerator or if allowed by State or local Authorities, by burning. If allowed by State or local authorities, by burning. If burned, stay out of smoke.

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

RIPENING ROOMS:

BANANAS and TOMATOES

Use in the first 24 hours of ripening period.
Example: One quart properly used in 4,000 to 8,000 cubic feet ripening room produces ethylene concentrations varying from 20 to 1200 P.P.M. over a period of 13 hours.

One pint properly used in 1,000 to 4,000 cubic feet ripening room produces ethylene concentrations varying from 20 to 600 P.P.M. over a period of 8 hours. By using the ARCO Ethylene Generator and selecting the appropriate method, the output of ethylene can be more constant and dependable. See ARCO Ethylene Generator Instructions.

USE PRECAUTIONS

Use of this product in enclosures less than 1,000 cubic feet is prohibited.

The ripening room should be reasonably airtight, all vents and doors closed, cracks or holes in walls and doors should be repaired or covered over.


TOBACCO (FLUE-CURED)

Use two (2) quarts immediately after filling 1500 to 2500 cubic foot curing barn over a period of 12 hours. Use additional 2 quarts of Ripener I as required.

WARRANTY

Seller's liability for breach of warranty, express or implied, in connection with the sale of this product shall be limited to replacement at seller's expense the product, and in no case shall seller be liable for incidental or consequential damages.

*Actual label
Will have typing
above and below
the same size
as*

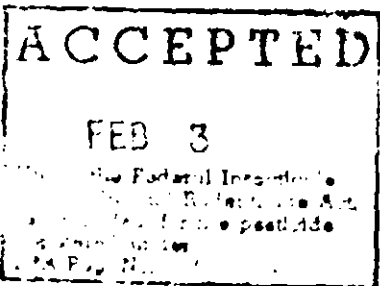

BEST AVAILABLE COPY