

DIRECTIONS FOR USE

TERMINATOR 100

ACTIVE INGREDIENT:

Potassium dimethyldithiocarbamate 50.0%

INERT INGREDIENTS 50.0%

The product contains 5.2 lb. of active ingredient per gallon and weighs 10.4 lb. per gallon.

KEEP OUT OF REACH OF CHILDREN
DANGER

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER Corrosive. Causes eye and skin damage. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Avoid contamination of food. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly after handling.

STATEMENT OF PRACTICAL TREATMENT: In case of skin contact, wash with plenty of soap and water. Remove contaminated clothing and wash before reuse. If no rinses in the eyes, flush immediately with copious amounts of clean, cool water for at least 15 minutes. Get medical attention immediately. If product is swallowed, promptly drink 10 glasses of water. Contact a physician or Poison Control Center immediately. **TELEPHONE NUMBER:** 1-800-234-9776.

Note to physician: Prostaglandin and damage may contraindicate gastric lavage.

ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply to streams, ponds, lakes, oceans, bays, marshes, waters unless the product has been registered by EPA as a disinfector under NPDCC permit. Do not discharge in effluent or stormwater systems without properly notifying the responsible treatment plant or agency. Do not apply to surface waters unless the use is specifically permitted by state or local authorities. Do not apply to off-site areas.

Manufactured by

CHARLES J. HAAS, INC.
AMERICAN & CUMBERLAND SIS.
PHILADELPHIA, PA 19133

EPA REG. NO.

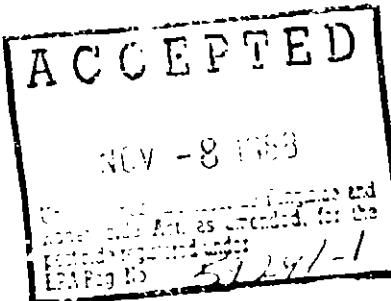
EPA EST. NO.

NET CONTENTS

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

TERMINATOR 100 is used in industrial and/or commercial recirculating cooling tower systems and industrial air washing systems to control microbiological slime. Prior to the use of TERMINATOR 100 in industrial and/or commercial recirculating cooling tower systems, systems should be cleaned to remove algal growth, microbiological slime, and other deposits. Then make an initial slug addition of 2.0 to 3.0 fl. oz. of TERMINATOR 100 per 1000 gal. of water to provide 20 to 30 ppm of TERMINATOR 100, based on total weight of water in the system. Repeat initial dosage until control is evident. Make subsequent slug addition of 1.0 to 3.0 fl. oz. of TERMINATOR 100 per 1000 gal. of water (10 to 30 ppm TERMINATOR 100) every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of recirculating cooling tower systems.

TERMINATOR 100 is used in industrial air washing systems which maintain effective mist eliminating components. Prior to its use, systems should be cleaned to remove bacterial slime and other deposits. An initial slug dose of 4.7 to 6.0 fl. oz. of TERMINATOR 100 per 1000 gal. of water is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 3.2 to 6.0 fl. oz. of TERMINATOR 100 per 1000 gallons of water should be employed every 1 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and severity of the bacterial problem. Slug additions may be made to the sump or the water collection trays of the airwash system.

**STORAGE AND DISPOSAL**

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than four drums high. Leaking or damaged drums should be placed in overpack drum for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray residue, or waste in violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Response Office for guidance.

CONTAINER DISPOSAL

(1) PLASTIC: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

(2) METAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.