

60061-11

10-27-2000

1/4

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

OCT 27 2000

Kop-Coat, Inc.  
436 Seventh Avenue  
Pittsburgh, PA 15219-1818

Attn: Alan S. Ross, Vice President

Subject: Z\*Spar "The Protector" TF B-90 Red  
EPA Registration No. 60061-11  
Amendment Dated October 5, 2000

This will acknowledge receipt of your notification to include the additional brand name "Pettit Marine Paint Premium Line Super Premium Performance Antifouling Finish 1690 Red", submitted under the provisions of FIFRA Section 3(c)9. Based on a review of the submitted material, the following comments apply.

The notification is in compliance with PR Notice 98-10 and is acceptable. This information has been made a part of your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely



Marshall Swindell  
Product Manager 33  
Regulatory Management Branch 1  
Antimicrobial Division (7510C)

CONCURRENCES

SYMBOL							
SURNAME							
DATE							



United States  
**Environmental Protection Agency**  
 Washington, DC 20460

<input type="checkbox"/>	Registration
<input type="checkbox"/>	Amendment
<input checked="" type="checkbox"/>	Other

OPP Identifier Number  
**243935**

**Application for Pesticide - Section I**

1. Company/Product Number <b>60061-11</b>		2. EPA Product Manager <b>Marshall Swindell</b>		3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted	
4. Company/Product (Name) <b>Z-Spar The Protector TF-B-90 Red</b>		PM# <b>33</b>			
5. Name and Address of Applicant (Include ZIP Code) <b>Kop-Coat Inc. 436 Seventh Avenue Pittsburgh, PA 15219-1818</b> <input type="checkbox"/> Check if this is a new address		6. Expedited Review. In accordance with FIFRA Section 3(c)(3)(b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____			

**Section - II**

<input type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

**Explanation: Use additional page(s) if necessary. (For section I and Section II.)**  
**Pettit Marine Paint Premium Line Super Premium Performance Antifouling Finish 1690 Red**

**Section - III**

1. Material This Product Will Be Packaged In:					
Child-Resistant Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	2. Type of Container <input checked="" type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____		
* Certification must be submitted		If "Yes" Unit Packaging wgt. _____ No. per container _____	If "Yes" Package wgt. _____ No. per container _____		
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed to Product <input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled			<input type="checkbox"/> Other _____		

**Section - IV**

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application:)					
Name <b>Kim Treloar</b>		Title <b>Product Registration Specialist</b>		Telephone No. (Include Area Code) <b>(412) 826-3323</b>	
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.					6. Date Application Received (Stamped) ..... ..... .....
2. Signature 			3. Title <b>Vice President</b>		
4. Typed Name <b>Alan S. Ross</b>			5. Date <b>October 5, 2000</b>		

50-469 07/20/00



# PREMIUM LINE

# SUPER PREMIUM PERFORMANCE

## ANTIFOULING FINISH

### 1690 RED

- Economical Antifouling Protection
- Hard Smooth Finish
- Apply Over Most Other Antifouling
- Excellent For Fiberglass, Wood & Steel Boats

NON-COMMERCIAL USE


KEEP OUT OF REACH OF CHILDREN.

**WARNING!**

**HARMFUL OR FATAL IF SWALLOWED.**

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NET CONTENTS  
1 GALLON (128 FL. OZ.)  
3.785 LITERS

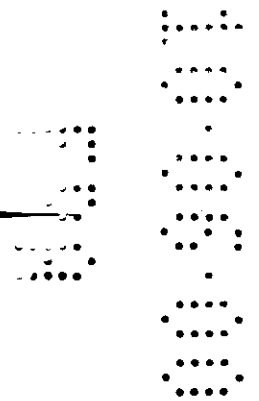

3/4

## SUPER PREMIUM PERFORMANCE BRAND ANTIFOULING FINISH

Super Premium Performance Brand Antifouling Paint: A highly effective hard antifouling bottom paint of premium quality. Contains a high concentration of cuprous oxide. Protects against attachment of barnacles, hydroids, bryozoa, algae and other marine or fresh water growths. Protects wood boats against borers. For use in both salt and fresh water. Do not apply to any surfaces other than boat bottoms.

### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with it's labeling.

### GENERAL

Be sure surface is clean and dry before painting. When sanding is necessary on surfaces, remove sanding dust by clean air blast, clean soft brushes, or wiping with clean rags, then follow by tack rag wipe to insure complete removal of sanding dust. NOTE: Face mask should be used when sanding.

Stir paint well before and during use. Apply generously with brush or roller at package consistency. If thinning is necessary due to evaporation of solvent from the can, use Pettit 120 Brushing Thinner. Do not spray as inhalation of spray mist is hazardous. Do not apply at temperatures below 40°F, or if rain is expected before the coating is dry.

**COVERAGE:** Approximately 400 sq. ft. per gallon (allows for a 20% loss).

**NUMBER OF COATS:** 2 or 3 depending on the surface.

**DRYING TIME AT 70°F AND 50% HUMIDITY:**

Between coats: 6 hours minimum.

Prior to Launching: 6 hours minimum to overnight; preferably; 60 days maximum.

**THINNER:** Pettit 120 Brushing Thinner

**CLEANER:** Pettit 120 Brushing Thinner

**OLD BOTTOM PAINTS:** After hauling the boat, allow the hull to dry thoroughly of absorbed water before repainting. Over old dry paint apply two coats of this product for best results after scrubbing, cleaning, and removing any loose paint. **WHEN SANDING OLD BOTTOM PAINT, ALWAYS WET SAND** and take precautions against getting the material in your eyes, nostrils, open cuts, etc. Where excess bottom substrate is visible, prime per instructions for the substrate.

**WOOD BOTTOMS:** Sand wood surfaces with 80-100 grit wet or dry sandpaper. Apply three coats of this product to bare wood. Thin first coat with Pettit 120 Brushing Thinner to allow greater penetration. The next two coats should be applied at package consistency. Any metal parts must be properly primed before applying the bottom paint.

**FIBERGLASS BOTTOMS:** Wash with soap, ammonia, and water. Let dry, then thoroughly clean hull with Pettit 95 Fiberglass Dewaxer. Then sand with 80-grit sandpaper to dull and roughen the surface. Wipe off sanding dust with clean cloth or tack rag. Apply two coats of this product. For prevention and repair of bottom blisters, use three coats of Pettit 4700/4701 High Build Epoxy Primer "wet-on-wet" with this product. See the 4700/4701 technical data sheet for application details.

**STEEL BOTTOMS:** Sandblast to near-white metal surface and apply three coats of 4700/4701 High Build Epoxy Primer to a minimum 12 dry mils film thickness, following the 4700/4701 High Build Epoxy Primer label instructions. Then follow with two coats of this product.

**ALUMINUM BOTTOMS:** This product is NOT recommended for aluminum.

### STORAGE AND DISPOSAL

**STORAGE:** Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.

**PESTICIDE DISPOSAL:** Do not contaminate water. Pesticide wastes are toxic. Improper disposal of excess is a violation of Federal Law. If these wastes cannot be label instructions, contact your State Pesticide or Environmental Hazardous Waste representative at the nearest EPA Regional Office.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent) and reuse for recleaning, or puncture and dispose of in sanitary approved by state and local authorities.

**VOC:** 374 grams per liter (as supplied).

### PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS WARNING

CONTAINS AROMATIC AND ALIPHATIC HYDROCARBON ACETATES. See Material Safety Data Sheet for full details. Do not get on skin, in eyes, or on clothing. Wear goggles, long-sleeved cotton shirt, long pants, and gloves. Wash thoroughly with soap and water after handling and wash before reuse. Do not breathe sand or dust. Do not take internally.

### FIRST AID

**In case of skin contact,** wash thoroughly with soap and water immediately with plenty of water for 15 minutes and cover. **In case of breathing of vapor,** move to fresh air. **If not breathing,** if possible, administer artificial respiration preferably mouth-to-mouth. **If swallowed,** drink plenty of water, white, gelatin solution or if these are not available, drink milk or alcohol. **CALL A PHYSICIAN IMMEDIATELY.** NOTE TO USER: Full first aid instructions are given on the label. Damage may contraindicate the use of gastric lavage.

### KEEP OUT OF REACH OF CHILDREN

Use with adequate ventilation during application and clean-up. In confined areas, use only with adequate forced air ventilation to remove vapors which could cause death from explosion or fire. Do not use in confined areas or while sanding boat surfaces. Approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health (NIOSH) under CFR 11. Prevent flames, sparks, welding and smoking.

### ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water or cleaning of equipment or disposal of wastes. Do not allow paint to enter water during the paint removal to enter water. Dispose of paint and containers in accordance with applicable regulations.

### PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame. May irritate eyes, nose, throat, and skin. May cause dizziness, headache, nausea, vomiting, and respiratory distress. May cause chemical burns. May cause allergic reactions. Photochemically Reactive.

Medical Emergencies 1-800-424-9293



### ACTIVE INGREDIENT:

Cuprous Oxide 66.9%

Other Ingredients 33.1%

TOTAL 100.0%

This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2  
EPA REGISTRATION NO. 60061-11

KOP-COAT, INC.  
PETTIT PAINT BRAND  
ROCKAWAY, NJ 07866

An **RPM** Company