14.3 Www. 13.1995

Additional Brand Name and Amended Labeling

Your Application Dated February 3, 1995

registration under the Federal Insecticide, Fungicide

the product for shipment bearing the amended labeling:

EPA Registration No. 60061-28

Woodtreat MB Ready-To-Use Water Repellent Wood

Rodenticide Act (FIFRA), as amended is acceptable provided that

In the directions for use delete "CAUTION".

Signal Word, DANGER, is allowed on pesticide labeling.

The amendment referred to above, submitted in connection with

1. Make the labeling changes listed below before you release

Submit one (1) copy of your final printed labeling before

Sincerely yours,

Cynthia Giles-Parker Product Manager (22)

Fungicide-Herbicide Branch Registration Division (7505C)

A stamped copy of the labeling is enclosed for your records.

The additional brand name "Wolman F&P Premium Wood Finish and

Preservative" is acceptable and has been included in the files for

Only one

113

Alan S. Ross Kop-Coat, Inc.

Dear Mr. Ross:

this product.

Enclosure

Subject:

you:

436 Seventh Avenue Pittsburgh, PA 15219

Preservative

you release the product for shipment.

GIVES LONG LASTING BEAUTY TO WOOD PROTECTS WOOD AGAINST:

- Mildew Discoloration, Rot and Decay
- · Water and Ultraviolet Damage

PRESERVES NEW WOOD LOOK. RESTORES WEATHERED WOOD.

Wolman® F&P combines the beauty of a durable penetrating oil finish with the PROTECTION of our premium brand wood preservative system. F&P is easy to apply and provides long lasting performance. F&P can be deened up with mineral spirits or detergent and water.

Use Wolman F&P on exterior wood such as cedar, redwood, and pressure-treated wood. Apply to siding, shakes, shingles, decks, fences, and other above-ground structures. Not recommended for outdoor furniture or benches. Exceeds Federal specification for water repellency TT-W-572B, paragraph 3.7.

DIRECTIONS FOR USE:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

SURFACE PREPARATION: All surfaces should be clean, dry and free of mildew. For weathered wood, clean with Wolman Deck & Siding Brightener/Rejuvenator. Where wood extractives have darkened cedar or redwood, use Cedar & Redwood Deck & Siding Brightener/Rejuvenator. IMPORTANT: Surface preparation with products containing chlorine bleach (sodium hypochlorite) alone is not recommended. These products can leave dirt deposits on the surface that interfere with the penetration and adhesion of protective coatings.

APPLICATION: Mix thoroughly before use and stir occasionally during application. Apply with Wolman "BackSaver" 2" Sprayer (back-brush with grain) brush, pad, roller, or dip (3 minutes). Do not apply over paint or stain. Do not use primer coat. Surface may be stained after sufficient weathering to allow thorough penetration. On vertical surfaces only, to keep new wood looking new and clean, or to bring weathered wood back to original color, apply two wet-on-wet coats. Do not allow product to dry fully between coats. Apply second coat no later than 12 hours after the first coat. (USE ONLY ONE COAT ON DECKS AND OTHER HORIZONTAL SURFACES. DO NOT OVER APPLY) Can be applied immediately to new dry wood. WHEN FIRST APPLIED, THE WOOD WILL DARKEN TO A RICH, NATURAL TONE. Over time, it will lighten, but the protection will be maintained. When a light gray color appears, it is time to re-coat. F&P may be applied immediately to WOLMANIZED® EXTRA PRESSURE-TREATED WOOD. Apply when temperatures are between 50°F and 90°F and when 24 hours of precipitation-free weather is expected.

COVERAGE: One gallon will cover approximately 50-250 square feet, one coat. Coverage varies with application and wood texture: CAUTION: Wood surfaces can be slippery when wet. A sample brush out is recommended to determine appearance.

CLEAN-UP: Brushes and rollers can be deaned immediately after use with detergent and water or with mineral spirits. To use detergent and water, detergent (Dishwashing liquid or liquid faundry detergent) should be applied directly to brush or roller and worked into the fibers prior to rinsing. Spray equipment should be flushed with mineral spirits. Wipe up splatters with detergent and water before they dry.

NEED HELP WITH WOLMAN WOOD CARE PRODUCTS? CALL 1-800-556-7737

ACCEPTED
with COMMENTS
In EPA Letter Dated:

MAR | 3 | 1995

for the Fot oil forestions wouldny exit of the cities of the first of the process to common file A Project of 6 006/- 28




Premium and P

 Long lasting water sealer for exterior wood

 UV resistant, keeps wood from turning gray

 Protects against rot and mildew

 Immediate application to all wood



Preserves The

KEEP OUT OF REACH OF CHILDREN.

DANGER! HARMFUL OR FATAL
IF SWALLOWED. CAUSES EYE AND
SKIN IRRITATION. VAPORS MAY BE
HARMFUL. COMBUSTIBLE.
EPA Reg. No. 60061-28 EPA Est. 60061-MO-1




BEST COPY AVAILABLE

Nolman®



remium Wood Finish. and Preservative

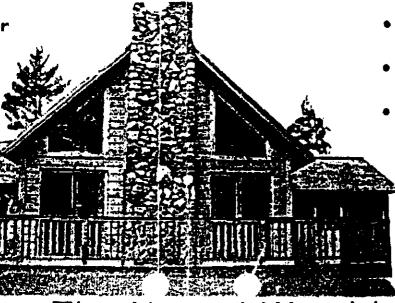

- Great on siding, decks, fences, and wood roofs
- Durable oil-base formula
- Mineral spirits or detergent & water cleanup



The Natural Wood Look



ACTIVE INGREDIENTS:	
3-lodo-2-Propynyl butyl carbamata , 0.50%	
INERT INGREDIENTS	
TOTAL100.00%	

This product contains petroleum distillates (mineral spirits). See side parel for first aid and additional precautionary statements.

1 U.S. Gallon (3.8 Liters)

)acket

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (AND DOMESTIC ANIMALS) DANGER

HARMFUL IF SWALLOWED, INHALED, OR ABSORBED THROUGH THE SKIN. MAY CAUSE EYE AND SKIN IRRITATION AVOID Contact with eves skin or clothing. Use of goggles and protective clothing (rubher gloves) when dipping and an approved respirator whe spraying is recommended. Avoid breathing of vapors, mist or substantially saturated atmosphere. Use only in well ventilated areas. Keep containers closed when not in use. Do not take internally.

FIRST AID: For skin contact, wash thoroughly with soap and water Percova contaminated clothing and shoes. Wash clothes before re-use. It case of eye contact, flush immediately with plenty of water for 15 minutes and get medical attention. If swallowed, CALL A PHYSICIAN IMMEDIATELY, DO NOT induce vomiting. If inhaled, remove to fresh air.

ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. Do not apply directly to water, to areas where surface water present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwaters. This product is toxic to domestic animals. Treated sawdust and other wood wastes should be disposed of properly and should not come in contact with plants. Care should be taken to prevent drips or spray from contact with ornamental shrubs, trees, grass and other desirable vegetation.

Vapors may cause injury if adequate ventilation is not insured. Do not use this product indoors, or any other confined areas where the vapors may concentrate or migrate indoors and cause injury to plant or animal life.

PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE, DO NOT use, pour, spill, or store near heat or open flame.

IN CASE OF FIRE: Use dry chemicals, foam, water, fog, or CO2. Cool closed containers with water.

STORAGE AND DISPOSAL

STORAGE: Store this product in its originally labeled container in a storage area located in a cool place. Keep container and freshly treated articles away from high temperature areas, sparks, fire or open fiame. If static generating conditions exist, provide necessary grounding and bonding. Keep this product separate from other pesticides during storage to prevent cross contamination of other pesticides, fertilizers, food and feed. Remove sources of ignition if this product is released or spilled. Confine area of spill and avoid breathing vapors. Ventilate area, Cover with absorber material and place in approved containers for disposal using non-sparking tools.

PESTICIDE DISPOSAL: Do not contaminate water, food, or feed by storage or disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedure approved by state and local authorities.

LIMITED WARRANTY: Wolman* F&P Premium Wood Finish & Preservative is guaranteed to repet water and protect wood against decay for up to four (4) years on vertical surfaces or up to two (2) years on hor zontal surfaces when applied according to label directions. Some color fightening may occur during this time. Directions are as complete as possible, but cannot encompass all conditions, applications, techniques and/or surfaces which are beyond our control. Warranty is limited to replacement or refunded value of product actually used. If you have a question, check with your dealer or call Wolman Wood Care
Products. Prisburgh, PA 1-800-556-7737. KOP-COAT MAKES NO FURTHER WARRANTIES
EXPRESSED OR IMPLIED INCLUDING WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE
OR MERCHANTABILITY WHICH EXTEND BEYOND THE DURATION OF THIS WRITTEN WARRANTY. Wolman Wood Care Products, Kop-Coat, Inc.

Koppers Building K-1824 Pittsburgh, PA 15219

An RPM Company

V.O.C. Max 2.5 1bs/gal (300 g/l)