

60061-28

06/15/2010

1/10

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

JUN 15 2010

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

Kim Treloar
Kop-Coat, Inc.
3020 William Pitt Way
Pittsburgh, PA 15238

Subject: **Wolman(R) F&P Premium Wood Finish and Preservative**
EPA Registration No.: 60061-28
Application Date: May 19, 2010
Receipt Date: May 24, 2010

Dear Ms. Treloar:

This acknowledges receipt of your notification, submitted under the provision of PR Notice 98-10, FIFRA section 3(c) 9.

Proposed Notification:

Adding additional brightener to application instructions

General Comment:

Based on a review of the material submitted, your notification to add additional brightener to the application instructions is acceptable and a copy has been inserted in your file for future reference.

Should you have any questions or comments concerning this letter, you may contact me by telephone at (703) 308-6416 or by e-mail at campbell-mcfarlane.jacqueline@epa.gov or Stacey Grigsby by telephone at (703) 305-6440 or by e-mail at grigsby.stacey@epa.gov during the hours of 8:00am to 4:00pm EST. When submitting information or data in response to this letter, a copy of this letter should accompany the submission to facilitate processing.

Sincerely,

Jacqueline McFarlane
Product Manager (34)
Regulatory Management Branch II
Antimicrobials Division (7510P)

CONCURRENCES

SYMBOL							
SURNAME							
DATE							



United States
Environmental Protection Agency
 Washington, DC 20460

<input type="checkbox"/>	Registration
<input checked="" type="checkbox"/>	Amendment
<input type="checkbox"/>	Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number Kop-Coat Inc./ 60061-28	2. EPA Product Manager Carlisle	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Wolman® F & P® Premium Wood Finish and Preservative	PM# 32 34	
5. Name and Address of Applicant (Include ZIP Code) Kop-Coat, Inc 1850 Koppers Building Pittsburgh, PA 15219 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input type="checkbox"/> Amendment - Explain below.	<input checked="" type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)
 Kop-Coat wishes to notify the EPA under the provision of FIFRA section 3(c) 9 and PR Notice 98-10 of alternate brightener names to be added under the application instructions to the label. The alternate names for a brightener "Weather Pro Wood cleaner & brightener" and "Weather Pro Stain & Finish Remover".

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No		<input checked="" type="checkbox"/> Metal	
* Certification must be submitted	If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt	<input type="checkbox"/> Plastic	
				<input type="checkbox"/> Glass	
				<input type="checkbox"/> Paper	
				<input type="checkbox"/> Other (Specify) _____	
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container 1 Gallon containers		5. Location of Label Directions <input type="checkbox"/>	
6. Manner in Which Label is Affixed to Product <input checked="" type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled			<input type="checkbox"/> Other _____		

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Kim Treloar	Title Product Registration Specialist	Telephone No. (Include Area Code) (412) 826-3323
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Vice President/ Technical Director	
4. Typed Name Alan S. Ross	5. Date May 14, 2010	

3/10

Kop-Coat, Inc.

3020 William Pitt Way · Pittsburgh, PA 15238 · 412-826-3388 · FAX 412-826-3393

KOP-COAT

May 19, 2010

Document Processing Desk
Office of Pesticide Programs, Registration Division (H7505c)
U.S. Environmental Protection Agency
Product Manager #33
Room S-4900, One Potomac Yard
2777 South Crystal Drive
Arlington, VA 22202-4501

SUBJECT: 60061-28
Notification to add alternate brightener to application instructions.


Dear Sir:

Kop-Coat, Inc. would like to request an under the provision of FIFRA section 3(c) 9 and PR Notice 98-10 of alternate brightener names to be added under the application instructions to the label. The alternate names for a brightener "Weather Pro Wood cleaner & brightener" and "Weather Pro Stain & Finish Remover".


"This notification is consistent with the provisions of PR Notice 98-10 and EPA regulations at 40 CFR 152.46, and no other changes have been made to the labeling or the confidential statement of formula of this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms of PR Notice 98-10 and 40 CFR 152.46, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA."

If you have any questions or concerns relating to the above product, please call me at (412) 826-3323. or ktreloar@kop-coat.com

Sincerely yours

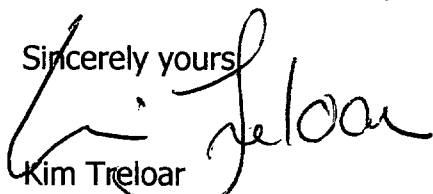

Kim Treloar
Product Registration Specialist
Kop-Coat, Inc.



4/10

**Wolman®
F & P®
Premium Wood Finish and Preservative**

**(Color/Appearance Statements)
(Use Statements)
(Control Statements)**

ACTIVE INGREDIENT:
3-Iodo-2-Propynyl Butyl Carbamate 0.50%
OTHER INGREDIENTS: 99.50%
TOTAL 100.00%
EPA Reg. No. 60061-28 EPA Est. No. 60061-MO-1
EPA Est. No. 71240-NJ-001

KEEP OUT OF REACH OF CHILDREN.


CAUTION

**This product contains petroleum distillates (mineral spirits).
See back panel for first aid and additional precautionary statements.**

**1 U.S. Gal. (3.8 L)
1 U.S. QUART (.95 L)
5 U.S. Gals. (19 L)
3 U.S. Gals. (11.36 L)**

NOTIFICATION
Date Reviewed: 4/15/10
Reviewed By: [Signature]

MASTER LABEL



(Side-Under Left Ear)
(retail)

**Don't Just Stain Your Wood
Preserve It!
Contains a Wood Preservative to
Protect Wood Against Rot and Decay**

- ◆ **Preservative Inhibits Mold, Mildew & Fungus Growth on Wood**
that can lead to rot and decay.
- ◆ **Long Term Water Repellent**
exceeds Federal specifications; minimizes water damage such as splitting and warping.
- ◆ **"Dual Action" UV Protection**
uses blockers and absorbers to resist fading and wood graying.
- ◆ **Durable, Penetrating Formula**
will not peel or blister.
- ◆ **Deep, Rich Oil Finish**
beautifies new wood and renews weathered wood.
- ◆ **Transparent, Natural Wood Colors**
enhance original wood color, grain and texture.
- ◆ **One Coat Coverage on Decks**
gets the job done fast.
- ◆ **Easy to Apply and Clean Up**
Brush, pad or spray on, soap and water cleanup.

(Side-Under Right Ear)
(retail)

3 Year Warranted Performance!

For a minimum of 3 years, this product will:


- ◆ **Prevent Water Damage**
- ◆ **Protect Against Rot & Decay**
- ◆ **Resist Peeling and Blistering**

This premium "finish and preservative" formula not resists UV graying, it protects against water damage and wood rot and decay, the worst deterioration of all. Plus, its penetrating oil-base nature makes the coating resistant to peeling and blistering. As a result, **these three performance properties are warranted to assure your satisfaction.**

**Complete Protection,
Multi-Project Finish!**

Unlike other wood protectors that only resist mildew growth on the coating film, **the preservative ingredient in this product protects the wood itself from mold, mildew and other staining fungi.** That makes it a complete protective finish for ALL your outdoor wood projects:

- Decks**
- Fencing**
- Shake, Shingle, Lap and Log Siding**
- Shake & Shingle Roofing**
- Exterior Doors, Window Frames, Trim**
- Boat Docks & Boardwalks**
- Outdoor Furniture & Decor**
- Spa Cabinets**
- Gazebos & Arbors**
- Play Sets**
- and more!**



Back Panel (Left)

F & P[®] Premium Wood Finish and Preservative

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL PRECAUTIONS AND RESTRICTIONS

Residential Users: Do not apply this product in a way that will contact any person or pet.

Commercial Users: Do not apply this product in a way that will contact workers or other persons. This product is toxic to domestic animals.

DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD. Apply this product only as specified on the label. Keep container closed when not in use. Wear goggles, rubber gloves and protective clothing when applying or handling treated lumber. Use only in a ventilated area. Keep contents and freshly treated articles away from food and living plants.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

PESTICIDE STORAGE: This product will not freeze but may become cloudy at colder temperatures. Store this product in its originally labeled container and in a storage area located in a cool place. Keep container and freshly treated articles away from high temperature areas, sparks, fire or open flame. If static generating conditions exist, provide necessary grounding and bonding. Keep this product separate from other pesticides during storage to prevent cross contamination of other pesticides, fertilizers, food and feed. Remove sources of ignition if this product is released or spilled. Confine area of spill and avoid breathing vapors. Ventilate area. Cover with absorbent material and place in approved containers for disposal using non-sparking tools. Keep container tightly closed when not in use.

PESTICIDE DISPOSAL: Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Residential Users: Do not reuse container. Securely wrap original container in several layers of newspaper and discard in trash. Commercial Users: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

WHERE TO USE

FOR EXTERIOR, ABOVE GROUND USE ONLY.

WOOD TYPES: Use on all species of Pressure-Treated lumber, Cedar, Redwood, Poplar, Hickory and other North American hardwoods.


PROJECTS: Use to beautify and protect newly installed or existing decks, fencing, siding or roofing shakes & shingles, clapboard, lap or log siding, exterior doors, window frames and trim, boat docks, boardwalks, outdoor furniture & decor, spa cabinets, gazebos, arbors & trellises, storage sheds, play equipment / gym sets and more.

APPLICATION INSTRUCTIONS

(retail)

SURFACE PREPARATION: The preparation process outlined below should be followed to ensure adequate penetration, coloration and optimum performance of this product

Step 1 – Perform a Splash Test: Regardless of whether wood is newly installed or pre-existing, it is important to determine if there is a surface barrier present which would prevent the proper penetration or adhesion of a new coating. To conduct a Splash Test, sprinkle several handfuls of water on a few distinct areas of the surface. If the water absorbs rapidly, the surface is ready to

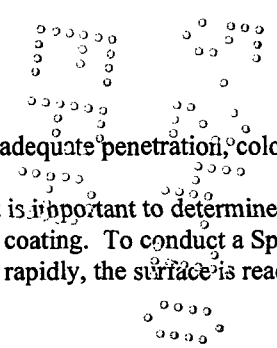

be coated. If the water beads, puddles... is not absorbed, an internal or external barrier... exists, and must be eliminated before coating can begin

Step 2 – Prepare the surface with Wolman® DeckBrite™, Deck & Fence Brightener or DeckStrip®. Repeat Splash Test to confirm water absorption before applying this product.

Uncoated, New Wood: If pressure-treated lumber, beading or puddling water may indicate either a surface barrier such as excess surface wax or excessive internal moisture content. If new Cedar or Redwood, “mill glaze” on the surface is likely. Use Wolman DeckBrite powder concentrate or Deck & Fence Brightener liquid concentrate according to label directions, then conduct Splash Test again. If absorption is not improved, allow wood to dry a minimum 30 days in temperate weather (avg. 70° F, 50% humidity), longer in cooler or more humid conditions. Test for absorption again before applying this product.

Uncoated, Weathered Wood: Before coating, weathered wood must be thoroughly cleaned to remove ground in dirt, mildew, mold and algae stains, gray, UV-damaged wood fibers and any other surface contaminants. Use Wolman DeckBrite powder concentrate or Deck & Fence Brightener liquid concentrate according to label directions.

Previously-Coated, Weathered Wood: Previous coatings should be removed before application of this product. If pigmented oil or latex coating exists, use Wolman DeckStrip® Stain & Finish Remover according to label directions to prepare the surface.

Acrylic coatings may require a paint stripper. If coated with a clear sealer or lightly pigmented finish and little to no pigment remains, Wolman DeckBrite powder concentrate or Deck & Fence Brightener liquid concentrate, followed by pressure-washing, is recommended to restore the surface and remove residual coating/water repellency.

Before applying this oil-base product, wait at least 24 hours after cleaning, stripping or power-washing to allow the water-soaked wood to dry out thoroughly. Oil-base finishes will not properly penetrate wood that is water-saturated.

BEFORE YOU START COATING: Prior to project start date, perform a trial brush-out in several inconspicuous areas to ensure the desired color is achieved. (Color appearance will vary depending on wood species, age and surface porosity). Replace rotted, extremely weathered or warped boards. This product will not repair existing wood damage such as cracking, checking, splintering or splitting. Make sure entire wood surface is completely dry and free of dust, dirt and debris. Cover all surrounding areas not intended to be coated. Thoroughly rinse these areas before and after application. Intermix multiple gallons of the same product in a separate container to ensure a uniform color. Mix thoroughly before use and stir occasionally during application. Do not tint, dilute or mix this product with any other product.

(retail and commercial)

APPLICATION: For best results, apply when outside temperatures are between 50°F and 90°F, and when 24 hours of precipitation-free weather is expected. Do not apply to wood that is hot to the touch or in direct sunlight to prevent premature evaporation. Apply with a natural or synthetic bristle staining brush, stain/paint pad, pump sprayer, HVLP or airless sprayer, or dip (3 minutes). When spraying, work on a 30-40 square foot area at a time, making sure to back-brush along the grain any drips, runs, uneven coverage or surface puddles. Do not over-saturate surface with product or allow to puddle to prevent shiners, tackiness, excessive drying time or uneven appearance when dry.

Horizontal Surfaces: APPLY ONE LIBERAL, UNIFORM COAT ON DECKS AND OTHER HORIZONTAL SURFACES.

Thoroughly coat all exposed surfaces until wood will not absorb additional product, and avoid puddling. Only if wood is highly porous is a second coat recommended. To test for this condition, check the penetration rate of the first 30 sq. ft. area coated. If the coating is dry to the touch in 15 minutes or less, then another light coat may be applied no later than one hour after first coat. Only half the amount is necessary for the second coat

Vertical Surfaces: APPLY TWO WET-ON-WET COATS ON SHAKE, SHINGLE OR LAP SIDING, ROOFING, FENCING AND OTHER VERTICAL SURFACES. Do not allow product to dry fully between coats. Apply second coat within 6 hours of the first coat.

This product must penetrate the surface to work properly-- do not apply over a sealed surface. Do not use as a primer coat. Clean-up over-spray, drips or splashes with soap and water immediately.

DRY TIME: Because temperatures and humidity fluctuate, allow a minimum 24-48 hours before using deck or outdoor furniture. Wait 72 hours to reposition furniture.

COVERAGE: To determine correct number of gallons required to complete your project, divide total square footage to be coated by 150. One gallon will cover approximately 150-200 square feet, depending on wood species, age, surface porosity and method of application. Rough, weathered or highly porous surfaces will absorb more product and reduce coverage rate. If surface requires two coats, first coat will cover approximately 150-200 square feet, second coat will cover approximately 200-300 square feet. **CAREFUL: As with application of any protective coating, WOOD SURFACES CAN BE SLIPPERY WHEN WET.**

CLEAN-UP: Wipe up wet coating spatters and spills immediately with soap and warm water. Dried spills can be removed with lacquer thinner or paint stripper. Clean tools and equipment immediately after use with soap and warm water or mineral spirits; dried product will require mineral spirits.

(retail)

MAINTENANCE: To maintain adequate preservative protection and shield wood against water damage, this product should be re-applied every three (3) years. In areas exposed to severe sun, heavy precipitation/humidity or temperature extremes, accelerated weathering can take place, especially on older wood. In these cases, a re-coat every two years may be desired to maintain protection

and color integrity. Always clean surface... *Wolman DeckBrite* or *Deck & Fence Brighter* before re-coating. Annual cleaning with mild soap and water is recommended to keep coating grime-free and looking its best.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION: Causes moderate eye irritation. Harmful if swallowed, absorbed through skin or inhaled. Avoid contact with eyes or clothing. Do not breathe vapor or spray mist. Use only in well-ventilated area, keep containers closed. Do not take internally. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply direct to water or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwaters or rinsate. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other water unless in accordance with the requirements of a National Pollution Discharge Elimination System (NDPES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE: Do not use or store near heat or open flame. **IN CASE OF FIRE:** Use dry chemicals, foam, water, fog carbon dioxide me or CO₂. Cool closed containers with water.

FIRST AID	
Have the product container or label with you when calling a Poison Control Center or doctor or going for treatment.	
IF IN EYES:	Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a Poison Control Center or doctor for treatment advice.
IF SWALLOWED:	Call a Poison Control Center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told by a Poison Control Center or doctor. Do not give anything by mouth to an unconscious person.
IF ON SKIN OR CLOTHING:	Take off contaminated clothing. Rinse skin immediately with plenty of water for 1-20 minutes. Call a Poison Control Center or doctor for treatment advice.
IF INHALED:	Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a Poison Control Center or doctor for further treatment advice.
NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. This product may pose an aspiration pneumonitis hazard. Contains petroleum distillate.	
HOT LINE NUMBER: Have the product container or label with you when calling a Poison Control Center or doctor or going for treatment. In case of medical emergency, for additional information call toll free: 1-800-548-0489.	


PPE FOR COMMERCIAL USERS

Applicators and other handlers must wear:

- long-sleeved shirt and long pants
- chemical resistant gloves (such as barrier laminate, nitrile rubber, neoprene rubber and viton)
- shoes plus socks

Follow manufacturers, instructions for cleaning/maintaining PPE. If no such instructions exist for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

USER SAFETY RECOMMENDATIONS	
Residential Users should:	Remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.



Commercial Users should:	<p>Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet.</p> <p>Remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.</p> <p>Remove personal protective equipment immediately after handling this product. Wash the outside of gloves before removing. As soon as possible wash thoroughly.</p>
---------------------------------	--

LIMITED WARRANTY

(retail)

The Company warrants, for three years after date of purchase, *Wolman® F&P® Premium Wood finish and Preservative* (Product) will protect wood substrate surfaces against rot and decay, prevent warping or splitting damage caused by water penetration, and resist peeling or blistering of the coating film. This warranty does not apply to wood that was rotting, decaying, splitting, or warping prior to application of the Product, or to pressure-treated wood that cracks, splits or warps after Product application due to escape of internal moisture. This warranty applies to Product applied to newly installed or pre-existing wood surfaces only if the surface has been properly prepared and the Product has been properly applied in accordance with directions on the Product Label. Label directions are as complete as possible but cannot encompass all conditions, applications and /or surfaces, all of which are beyond manufacturer's and seller's control. **This warranty does not apply to use of the Product in combination with other materials.**

The exclusive remedy for losses or damages resulting from this Product (including claims based on contract, negligence, strict liability or other legal theories) shall be limited to, at seller's or manufacturer's option, one of the following:

1. Refund of purchase price paid by buyer or user for Product purchased; or
2. Replacement of amount of Product used.

In no event shall seller or manufacturer be liable to user, buyer, or any third party for consequential or incidental damages or losses resulting from the use of the Product. The terms of this Warranty Disclaimer and Limitation of Liability cannot be varied by any written or verbal statements or agreements. No employee or sales agent is authorized to vary the terms of the Warranty Disclaimer and Limitation of Liability.

The warranty does not include labor or cost of labor for the removal or application of any Product or replacement of any wood structure. To obtain a warranty remedy, write to ZINSSER Co., Inc., 173 Belmont Drive, Somerset, NJ, 08875, and include proof of purchase.

(Commercial)

The Company, seller, and manufacturer make no other warranties, guarantees, or representations of any kind to buyer or user, or to any third party, either express or implied or by usage of trade, statutory or otherwise, with regard to the Product, including, but not limited to warranties of merchantability, fitness for a particular purpose, or use or eligibility of the goods for any particular trade usage. No warranties shall be created by course of performance, usage of trade, or course of dealing.

Wolman Logo /

Manufactured for:
 Wolman Wood Care Products
ZINSSER CO., Inc.
 173 Belmont Drive
 Somerset, NJ 08875


RPM Logo

QUESTIONS?

E-Mail: info@wolman.com
Web Site: www.wolman.com

V.O.C. MAX. 2.5 Lbs./Gal. (300 g/l)

- Z114406-0311-VWA copyright 2003 (F&P Gallon Re-order No.)
- Z114404-0311-VWA copyright 2003 (F&P Quart Re-order No.)
- Z114405-0311-VWA copyright 2003 (F&P 5-Gallon Pail Re-order No.)
- Z114408-0311-VWA copyright 2003 (F&P 3-Gallon Pail Re-order No.)



Front Label to include any of the following statements:

(Color/Appearance Statements)

- Transparent, Rich Oil Finish

(Use Statements)

- Decks, Fencing, Siding and more!

(Control Statements)

- Protects Wood Against: Rot & Decay, Mold & Mildew, Water Damage, UV Graying
- Protects Against Rot
- Inhibits Mold & Mildew Attack
- Prevents Water Damage
- Blocks UV Graying
- 3 YR Performance
- 3 YR Performance Guarantee
- 3 YR Warranted Performance

