

60061-31

06/06/2001

1/4

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

JUN 06 2001

Kop-Coat, Inc.
3020 William Pitt Way
Pittsburgh, PA 15238

Attention: Alan S. Ross, Vice President

Subject: Pettit Marine Paint SEA MATE Antifouling Bottom Paint
EPA Registration No. 60061-31
Amendment Dated May 16, 2001

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended, to change your product name from "Woolsey Tradewinds Antifouling bottom Paint" to "Pettit Marine Paint SEA MATE Antifouling Bottom Paint", is acceptable, provided that you make the following changes listed below.

1. As per PR Notice 2001-1, the heading "Statement of Practical Treatment" must be changed to "First Aid" and the statements must be revised as follows:

IF IN EYES:

Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.

IF SWALLOWED:

Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to by a poison control center or doctor.

IF ON SKIN:

Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment.

CONCURRENCES

SYMBOL							
SURNAME							
DATE							

JUN 06 2001

Page 2

IF INHALED:

Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.


In addition, the following general statement is required to be included with the First Aid statements, preferably, at the end of the statement.

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

2. Submit two (2) copies of final printed labeling for our review. A stamped copy of the labeling is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.


Sincerely,




Marshall Swindell
Product Manager 33
Regulatory Management Branch 1
Antimicrobial Division (7510C)

Enclosure

50-470-D 07/20/00



PETTIT
marine paint

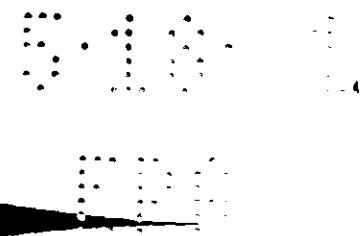

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Pettit Paint Company cannot guarantee this product's suitability for your particular purpose or application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

SEA MATE

ANTIFOULING BOTTOM PAINT

- Economical Antifouling Protection
- Effective Where Modest Fouling Prevails
- No Paint Build-Up From Season To Season
- Excellent For Fiberglass, Wood & Steel Boats

NON-COMMERCIAL USE
KEEP OUT OF REACH OF CHILDREN.

WARNING
HARMFUL OR FATAL IF SWALLOWED.
SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NET CONTENTS
1 GAL. (128 FL. OZ.)
3.785 LITERS

2/8

PETTIT MARINE PAINT
SEA MATE ANTIFOULING BOTTOM PAINT

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. Do not breathe sanding dust or vapor. Wear a mask or respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

IF SWALLOWED: Drink promptly large quantities of water. Avoid alcohol. Get medical attention.
IN EYES: Flush with plenty of water. Get medical attention.
ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.
PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE. Do not use or store near heat or open flame.

STORAGE AND DISPOSAL

STORAGE: Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.
PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.
CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
NOTE: When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mine Safety and Health Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.
NOTICE! This product contains a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Product Description: Pettit Marine Paint Sea Mate Antifouling Bottom Paint offers seasonal control in waters where modest fouling prevails. It is ideal for workboats, commercial fisherman and general boat yard use when excellent, yet economical protection is desired. By leaching and washing away, paint buildup from year to year will be very slight and the surface can be easily cleaned. This product may be applied on fiberglass, wood and properly primed steel boats.

Compatibility: This product may be applied over most aged hard and soft antifouling coatings. Old tin copolymers and teflon finishes must be completely removed before applying this product.

Mixing: It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Application Temperature: 40°F and above.

Application Method: Brush, roller, airless or conventional spray.

Thinner: For the first coat on new or bare wood, thin 10% with Pettit 120 Brushing Thinner. For other uses thinning is not normally required.

Coverage: 450 sq. ft. per gallon.

Number of Coats: On new or bare wood use 3 coats, allowing at least 3 hours between applications. On old painted hulls in good condition and on primed steel or primed fiberglass, apply one full coat of

this paint followed with a second coat where severe fouling exists as in tropical waters.

Dry Times:	To recoat	To launch
90°F	1 hour	2 hours
70°F	3 hours	4 hours
50°F	24 hours	48 hours

The above dry times are minimums. This product may be recoated and launched after the minimum times shown. Maximum dry time before launch is 7 days @ 70°F. If the boat is hauled during the season this product will lose effectiveness if left out of the water longer than three days.

VOC: 770 grams/liter (5.40 lbs/gallon) as supplied.

Maintenance of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. The self-cleaning nature of the coating is most effective when the boat is used periodically.

PAINT SYSTEMS

The paint systems outlined below contain references to other Pettit products. Please read and understand the label and/or Technical Bulletin for these products as well to ensure that they are used properly. For further guidance, please contact your local Pettit salesman or Pettit Customer Service Department at (800) 221-4466 between the hours of 8:30 a.m. and 4:30 p.m. E.S.T.

Previously Painted Surfaces: If the previous coating is in good condition thoroughly sand with 80-grit production paper and wipe clean with a rag dampened with Pettit 120 Brushing Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If the previous coating is in poor condition, remove to the bare surface by sanding or using paint and varnish remover. Proceed with the appropriate bare system as described below. Old tin copolymer paints and teflon finishes must be removed before applying this product.

Bare Fiberglass: All bare fiberglass, regardless of age, must be thoroughly cleaned using Pettit 95 Fiberglass Dewaxer and clean with lint-free rags. Several cleanings may be necessary to ensure complete removal of contaminants. Change rags frequently during the dewaxing/cleaning process to ensure complete removal of contaminants rather than merely smearing them on the surface. New boats must be scrubbed with a detergent and water solution and rinsed with fresh water prior to dewaxing. After the surface has been dewaxed, sand it thoroughly with 80-grit production paper and rewash the sanded surface with Pettit 95 Dewaxer or 120 Brushing Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If sanding is prohibited, as with certain vinyl-ester gelcoats, or is otherwise impractical, make sure the surface has been completely and thoroughly dewaxed and cleaned with Pettit 95 Fiberglass Dewaxer. Then apply one thin continuous coat of Pettit 6999 Sandless Primer. Topcoat with two coats of this product carefully following the topcoating instructions on the Sandless Primer label.

Bare Wood: Sand the entire surface with 80-grit production paper and wipe clean with a rag dampened with Pettit 120 Brushing Thinner. Apply a coat of this product thinned 10% with the Pettit 120 Brushing Thinner to penetrate and seal the wood. Fill any open seams with Pettit Seam Compound and allow to dry overnight. Apply two full coats of this product observing the proper dry times.

Steel Hulls, Underwater Metal Parts and Keels: For steel hulls and metal keels, consult Pettit Technical Bulletin TB431 High Build Epoxy Primer for complete priming instructions or consult the Pettit Technical Department or your local Pettit representative. For underwater metal parts, consult Technical Bulletin TB112 Underwater Running Gear Painting Specification for complete priming and applications details.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

WARRANTY: We guarantee this material to comply with our published specifications. Since the use of this material is beyond our control, we disclaim responsibility for its handling, use, storage, the results obtained or any injury or damage of any nature resulting thereon.

Manufactured by KOP-Coat Marine Group, Pettit Paint Brand,
Rockaway, NJ 07866

MEDICAL EMERGENCIES: 1-800-848-0489 Made in U.S.A. P3078 1225 GA-4/01

ACCEPTED
with COMMENTS
in EPA Letter Dated:

JUN 06 2001

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

60061-31



ACTIVE INGREDIENT:

Cuprous Oxide 24.5%

INERT INGREDIENTS 75.5%

TOTAL 100.0%

COPPER AS METALLIC 21.8%

This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061- 31

KOP-COAT, INC.
PETTIT PAINT BRAND
ROCKAWAY, NJ 07866

An **RPM** Company