
1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1	THE COME CHICK CHICK CHICK CHICK CONTRACTION OF THE PROPERTY O	0000
pm 31 600	6 1 -3 d	Post 17
Riease read instructions on reverse before completing form."	Form Approved CMR No. 2070 000	O Approved audious as page
	Form Approved. OMB No. 2070-006	OPP Identifier Number
Office of Pesticide Programs	(H7505C) Legistration	S. F. Joseph Hamog
Washington, DC 204	التشام بن جبال المسلمان و والأخوا	1100054
Application for P	esticide: X Other	193354
Section I		
1. Company/Product Number	2. EPA Product Manager 3.	Proposed Classification
60061-39	Marion Johnson	a — 1
4. Company/Product (Name)	PM#	None Bestricted
Neptune Anti-Fouling 712 Royal Blue 31		
5. Name and Address of Applicant (Include ZIP Code)  6. Expedited Review. In accordance with FIFRA Section 3(c)(3)		
Kop-Coat, Inc.	(b)(i), my product is similar or identical in composition and labeling	
436 Seventh Avenue	to:	
Pittsburgh, PA 15219	1	
	EPA Reg. No	
Check if this is a new address	Product Name	1
Section I I		
	<u> </u>	
Amendment - Explain below	Final printed labels in response to Agency letter dated	,,
Resubmission in response to Agency letter dated		
	"Me Too" Application.	
X Notification - Explain below.	Other - explain below.	
Explanation: Use additional page(s) if necessary. (For section I and Section II.)		
Notification of Labelling change per PR Notice 95-2, Section II.A.5.		
,		
	•	~
	No	•
Section III . Material This Product Will Be Packaged in:		
Section II	Ung MA	77
Child-Resistant Packaging Unit Packaging Wa	ter Soluble Packaging 2. Type of Conta	ner ·
Yes* Yes	Yes X Meta	
	X No Plast	
	Page	·
1 = 1 1 1 1 1	Yes," No. per Othe	r (Specify)
submitted.		
3. Location of Net Contents Information 4. Size(s) of Retail Container 5. Location of Label Directions		
Label Container 1 quart, 1 gallon On Labeling accompanying product		
6. Manner In Which Label Is Affixed To Product Lithograph		\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
X Paper glued		
Stenciled Section	VIV	
Contact Point (Complete items directly below for identification of it)		s this application.)
Name Title		hone No. (Include Area Code)
ALAN S. ROSS Vi	ce President (4)	
ALAN 3. AUSS	ce riesident . (4.	L2) 826-3387 .
Certification		6. Date Application
I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete.		
I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or (Stamped)		
both under applicable law.		
2. Signature 3. Ti	ite -	
Ran S. Ross VI	ice President	4 1
4. Typed Name 5. D	late	:
ALAN S. ROSS	B/9/96	eise`
	0/1/1/	.''';
EPA Form 8570-1 (Rev. 12-90) Previous editions are obsolete	White - EPA File Copy (original)	Yellow - Applicant copy

Anti-Fouling Finish For Wood, Fiberglass, and Steel Hulls

712 Royal Blue

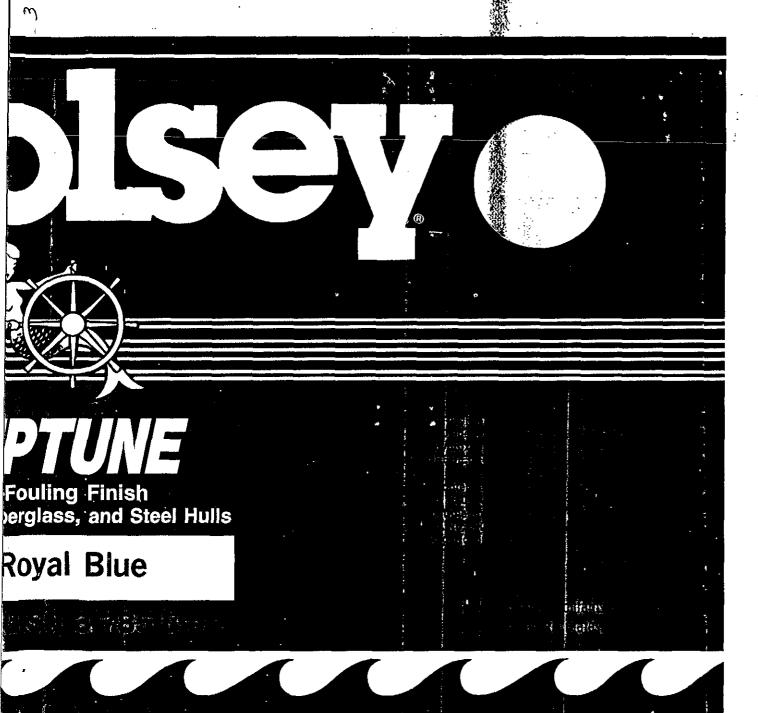

# **NEPTUNE ANT**

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS

## WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breath sanding, dust or vapor. Wear a mask or respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

### STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

IF IN EYES: Flush with plenty of water. Get medical

IF ON SKIN: Wash with plenty of soap and water. Get medical affention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

### **ENVIRONMENTAL HAZARD**

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

### PHYSICAL OR CHEMICAL HAZARD

COMBUSTIBLE. Do not use or store near heat or open flame.

WARRANTY: We guarantee this material to comply with our publi disclaim responsibility for its handling, use, storage, the results of

Manufactured by Kop-Coat, Inc., Wi


Product Emerg

It is a viole product is Safety and Occupation PREPARA paint, On th Cleaner or all sheen moistened PRIMING first coat 18 of wood or Alternate v APPLICA can—fher body with suspension NUMBER THINNIN on bare su necessary. COVERA LAUNCH

NEPTUN againsfalt NEPTUN on bare w NEPTUN NEPTUN

Primer is

STORAG In case of PESTICI are acute: Federal La Pesticide Regional ( CONTAI) puncture a

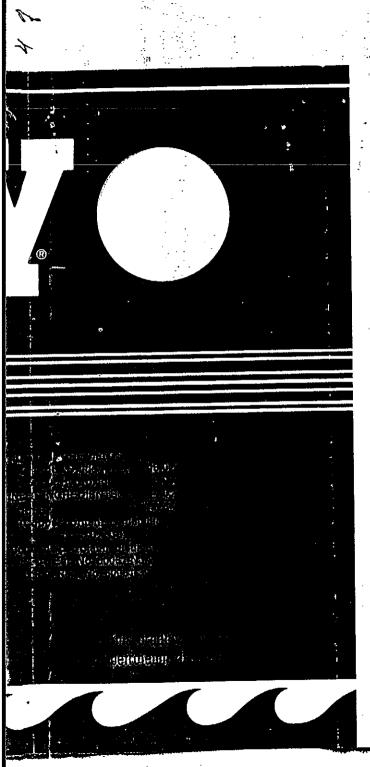

# **NEPTUNE ANTI-FOULING FINISH**

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS -AND DOMESTIC ANIMALS

### WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breath sanding, dust or vapor. Wear a mask or respirator jointly approved by the Mine Safety and Health Administration and the Nafional Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

### STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

IF IN EYES: Flush with plenty of water. Get medical

IF ON SKIN: Wash with plenty of soap and water. Get medical aftention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

### **ENVIRONMENTAL HAZARD**

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

### PHYSICAL OR CHEMICAL HAZARD

COMBUSTIBLE. Do not use or store near heat or open flame.

#### DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling. NOTE: When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mine Safety and Health Administration (formerly the U.S. Bureau of Mines) and by the Rational Institute for Occupational Safety and Health under the provisions of 30 CFR II.

PREPARATION: Scrape, wirebrush or sandpaper old surfaces to remove scum, contaminants or Joose paint. On bare (unpainted) fiberglass, first scour and scrub with Woolsey "Shipmale" Heavy Duy Fiberglass Cleaner or other strong abrasive agent. Rinse well with fresh water and allow to dry. Sand vigorously until all skeen on gel coat has been removed. Use 1/0 or No. 80 gril production paper. Wipe with clean rag moistened with paint thinner.

PRIMING: On new or bare wood areas and on unpainted fiberglass prepared as directed above, apply first coal thinned 10% as directed below. On Iron or steel keels, centerboards or other underwater fiftings of wood or fiberglass boals, lirst remove all old coalings. Then prime these metal areas with three coals. Alternate with 3 coals Woolsey 648/649 "MFP" Epoxy Primer or 2 coals 650/651 Hi Build Epoxy.

APPLICATION: Mix thoroughly to uniform consistency by pouring off some of top portion into clean can—then stirring the remainder and gradually adding the portion removed. Apply generously and at full budy with good bristle brush, using long even strakes. Stir occasionally during use to assure uniform suspension of loxicants in the vehicle.

NUMBER OF COATS: For initial applications, 2 coats are recommended.

THINNING: Reduce 10% with Woolsey 433 Paint Thinner, turpentine or mineral spirits for brush use on bare surfaces—also for spray application. Otherwise apply this paint at full body, thinning sparingly if

COVERAGE: One full coat covers 400 sq. ft. per gallon.

LAUNCHING: Allow from 6 hours to a week after final coat before launching. When an "MFP" Ecoxy Primer is used, allow from 3 days to a week before launching,

### **GENERAL DESCRIPTION**

NEPTUNE provides maximum protection from fouling of all kinds. Concentrated copper anti-fouling guards against affachments of barnacles, annetids, functates, bryozoa, hydroids, algae and other fouling organisms. NEPTUNE applies easily and dries quickly. May be used over old anti-fouling finishes in good condition, on bare wood or bare fiberolass surfaces.

NEPTUNE is a lough epoxy vehicle that withstands frequent frailering, beaching and launching. NEPTUNE should not be used on aluminum hulls.

#### STORAGE AND DISPOSAL

STORAGE: Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations. PESTICIDE DISPOSAL: Do not confaminale water, food or feed by storage or disposal. Pesticide wastes

are acutely hazardous. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instruction, contact your State Posticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or ounclure and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

WARRANTY: We guarantee this material to comply with our published specifications. Since the use of this material is beyond our control, we disclaim responsibility for its handling, use, storage, the results obtained or any injury or damage of any nature resulting therein.

Manufactured by Kop-Coat, Inc., Woolsey/Z\*Spar Division, Rockaway, NJ 07866

Product Emergencies 1-800-548-0489