

60061-50

5/20/2014

1/s



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

Sandy Lea
Kop-Coat, Inc
3020 William Pitt Way
Pittsburg, PA 15238

MAY 20 2014

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

Subject: Pettit Marine Paint Trinidad Antifouling 1675 Red
EPA Registration Number 60061-50
Application Dated: March 13, 2014
EPA Received Date: March 14, 2014

Dear Ms. Lea:

The following amendment, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), as amended, is acceptable.

- To update the label language.

Should you wish to retain a reference to the company's or social networking websites on your label, then please be aware that such references transform these websites and associated walls, comments, etc. into labeling under the Federal Insecticide Fungicide and Rodenticide Act sec 2 (p) (2) and then make these subject to review by the Agency. If the websites and social networking walls, comments, etc. content are false or misleading, the product would be misbranded and its sale or distribution unlawful to sell or distribute under FIFRA section 12(a)(1)(E). In addition, regardless of whether websites and social networking walls, comments, etc. are referenced on your product's label, claims made on these may not substantially differ from those claims approved through the registration process. Although EPA has not yet determined the extent to which it will routinely review company and social networking websites, if the Agency finds or if it is brought to our attention that a website, social networking wall, comment, etc. contains false or misleading statements or claims substantially differing from claims approved through the registration process, the company website and social networking site may be referred to the EPA's Office of Enforcement and Compliance Assurance


Submit and/or cite all data required for registration/reregistration/registration review of your product when the Agency requires all registrants of similar products to submit such data. A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. The next label printing of this product must use this labeling unless subsequent changes have been approved. You must submit one (1) copy of the final

printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and it's implementing regulation at 40 CFR 152.3.

General Comments

If you have questions concerning this letter, please contact Marshall Swindell at (703) 308 6341.

Sincerely,

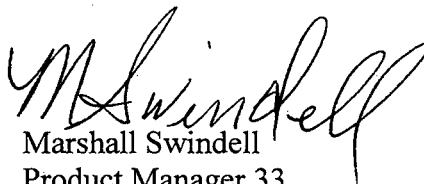A handwritten signature in black ink, appearing to read 'M Swindell', is written over the typed name.

Marshall Swindell

Product Manager 33

Regulatory Management Branch I

Antimicrobials Division(7510P)

PETIT

marine paint

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Petit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Petit Paint Company cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Petit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Petit Paint's option.


TRINIDAD ANTIFOULING 1675 RED

ACTIVE INGREDIENTS:
Cuprous Oxide* (CAS# 1317-39-1) 75.80%

INERT INGREDIENTS:
Total 24.20%
100.00%

*Metallic copper equivalent 67.30%

Contains petroleum distillates, xylene or xylene range aromatic solvents.

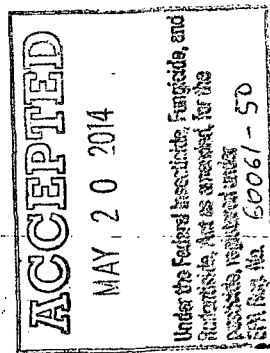

KEEP OUT OF REACH OF CHILDREN

WARNING

May be fatal if swallowed or inhaled.
Harmful if absorbed through skin.

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NET CONTENTS

1 GAL. (128 FL. OZ.)
3.785 LITERS

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061-50

KOP-COAT, INC.
36 PINE STREET
ROCKAWAY, NJ 07866

An RPM Company

3/5

STATEMENTS HUMANS AND DOMESTIC ANIMALS

...fatal if swallowed or inhaled. Do not breathe vapors, spray mist or sanding dust. Harmful if used through skin. Causes moderate eye irritation. Avoid contact with skin, eyes or clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet.

Personal Protective Equipment (PPE): Mixers, loaders, applicators and other handlers must wear the following: Protective eyewear, chemical resistant gloves such as Nitrile Rubber Gloves greater than 14 mils thick, long sleeved shirt, long pants and shoes plus socks.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic-vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number prefix TC-14C), or a NIOSH approved respirator with an organic vapor (OV) cartridge or canister with any N, R, P or HE prefilter.

Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions for washables exist, use detergent and hot water. Keep and wash PPE separately from other laundry.

Discard clothing and other absorbent material that have been drenched or heavily contaminated with the product's concentrate. Do not reuse them.

USER SAFETY RECOMMENDATIONS

Users should wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet. Users should remove clothing/PPE immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.

Use should remove PPE immediately after handling this product. As soon as possible, wash thoroughly and change into clean clothing.

Wash the outside of gloves before removing.

FIRST AID	
IF SWALLOWED:	• Call a poison control center or doctor immediately for treatment advice.
	• Do not give any liquid to the person.
	• Do not induce vomiting unless told to do so by a poison control center or doctor.
	• Do not give anything by mouth to an unconscious person.
IF IN EYES:	• Hold eye open and rinse slowly and gently with water for 15-20 minutes.
	• Remove contact lenses, if present after the first 15 minutes; then continue rinsing eye.
	• Call a poison control center or doctor for treatment advice.
	• Take off contaminated clothing.
IF ON SKIN OR CLOTHING:	• Rinse skin immediately with plenty of water for 15-20 minutes.
	• Call a poison control center or doctor for treatment advice.
IF INHALED:	• Move person to fresh air.
	• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible.
	• Call a poison control center or doctor for further treatment advice.

HOT LINE NUMBER

Hot line product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.

NOTE TO PHYSICIAN

Contains petroleum distillate. Vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

Material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not use chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters, unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the treating authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system if previously notified the local sewage treatment plant authority. For guidance contact your State Water Board or the National Office of the EPA.

CALIFORNIA CHEMICAL HAZARDS: COMBUSTIBLE. Do not use or store near heat or open flame. Use with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO₂ or dry chemical. Wear MSHA/NIOSH certified breathing apparatus.

STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited.

Pesticide Storage: Store in a closed, properly labeled container in a cool place. Keep closures tight and upright to prevent leakage. Keep containers closed when not in use. In case of spillage, absorb and dispose of in accordance with applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinseate violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

Container Handling: Non-refillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinse into application equipment or a mix tank or store rinse for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times. Then offer for recycling if available or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

NOTICE! THIS PRODUCT CONTAINS A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Product Description: This product is a top-of-the-line hard modified epoxy antifouling paint for use on boat bottoms. It is an antifouling protective coating resistant to algae, barnacles and other marine fouling. Designed to repel fouling in the most severe fouling tropical waters, it can be used equally successfully in temperate waters as well as fresh water. This product may be applied on fiberglass, wood or properly primed steel boats. It is ideal for both power and sailboats, anywhere a durable finish and long lasting performance is desired.

Surface Preparation: The surface to be painted should be dry, clean and free of any contaminants. It should be properly prepared by solvent cleaning and sanding before any primers or paints are applied. Follow the recommended systems below. When sanding old antifouling paint, always wear Personal Protective Equipment (PPE) as described above to prevent the inhalation of sanding dust.

Preparation of Paint: This product is heavily loaded with cuprous oxide. As a result of this loading there is a tendency for settling to occur especially if the paint has been on the shelf for several months. It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Application Temperatures: 40°F to 90°F.

Application Method: Brush, roller or spray.

Thinner: Thinning this product is not normally required. If thinning is necessary, use Pettit 120 Brushing Thinner for a smoother finish on especially warm and breezy days. Use Pettit 121 Spraying Thinner for spray application. Do not thin more than 10% by volume (12 ounces per gallon), or inadequate paint film thickness may result in premature erosion of the finish. Use either thinners for clean-up.

Coverage: This product covers approximately 400 square feet per gallon when applied at 2 dry mils film thickness.

Number of Coats: Two or three coats should be applied for best antifouling protection. Do not apply this product if rain or dew is expected before the surface has dried completely.

Dry Times: To recoat To launch

90°F 2 hours 8 hours
70°F 4 hours 16 hours
50°F 6 hours 24 hours

The above dry times are minimums. This product may be recoated after the minimum times shown and launched up to 60 days after painting.

VOC: Less than 400 g/l as supplied

Maintenance Of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure.

Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint.

Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure no growth is occurring. The self-cleaning nature of the coating is not permanent.

Boats and vessels should not be scrubbed or cleaned for months thereafter.

SYSTEMS

Mix paint thoroughly to ensure toxicants are evenly dispersed throughout the can. All surfaces must be clean, dry and properly prepared prior to painting.

Compatibility: This product may be applied over most aged hard antifouling coatings. Old soft antifouling paints must be completely removed before applying this product. Old tin copolymers must be removed completely or sealed with Pettit 6627 Tie-Coat Primer before applying this product. The paint systems outlined below contain references to other "it" products. Please read and understand the label and/or Technical Bulletin for these products as well to ensure that they are used properly.

Previously Painted Surfaces: If the previous coating is in good condition thoroughly sand with 80 grit paper and wipe clean with a rag dampened with Pettit 120 Brushing Thinner to remove sanding residue.

Apply two coats of this product observing the proper dry times. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using paint and varnish remover. Proceed with the appropriate bare system as described below.

Bare Fiberglass: All bare fiberglass, regardless of age, must be thoroughly cleaned and de-waxed with Pettit 92 Bio-Blue Hull Surface Prep or de-waxed several times with Pettit D95 Dewaxer. Sand thoroughly with 80 grit sandpaper to a dull, frosty finish and rewash the sanded surface with 120 Brushing Thinner to remove sanding residue. Then apply two coats of this product, following application instructions.

To eliminate the sanding operation, two methods are available:

1. Clean and de-wax the surface as described above, apply one very thin coat of 6998 Skip-Sand Primer using 3/16" or less nap roller or brush apply. Consult the primer label for complete application and antifouling top-coating instructions. Then apply two coats of this product or
2. Clean, de-wax and etch the surface with 92 Bio-Blue Hull Surface Prep using a coarse Scotchbrite® pad in a swirling motion. Clean off all residue by rinsing or wiping off with fresh water. Apply one coat of Pettit Protect Epoxy Primer. Consult the primer labels for complete application and antifouling top-coating instructions. Then apply two coats of this product.

Bare Wood: Sand the entire surface with 80 grit production paper and wipe clean with a rag dampened with 120 Brushing Thinner. Apply a coat of this product thinned 25% with 120 Brushing Thinner to penetrate and seal the wood. Fill any open seams with Pettit Seam Compound and allow to dry overnight. Apply two full coats of this product observing the proper dry times.

Steel's, Underwater Metal Parts and Keels: For steel hulls and metal keels, consult Pettit Technical Bulletin B431 High Build Epoxy Primer for complete priming instructions or consult the Pettit Technical Department or your local Pettit representative. For underwater metal parts, consult Technical Bulletin TB112 Underwater Running Gear Painting Specification for complete priming and application details.

All Other Substrates: Please go to www.pettitpaint.com and consult the product data sheet.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

Warranty: We guarantee this material to comply with our published specifications. Since the use of this material is beyond our control, we disclaim responsibility for its handling, use, storage, the results obtained or any injury or damage of any nature resulting therefrom.

MEDICAL EMERGENCIES: 1-800-548-0489 Made in U.S.A. P3001 GA-9/13

PRODUCT INFORMATION: 1-800-227-4266 or WWW.PETTITPAINT.COM