

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (75-767) WASHINGTON, DC 20460	EPA REGISTRATION NO. 60061-71	DATE OF ISSUANCE MAR 14 1989
	TERM OF ISSUANCE	
NOTICE OF PESTICIDE: <input type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION (Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)	NAME OF PESTICIDE PRODUCT Premium Performance Antifouling Finish 709 Red	
NAME AND ADDRESS OF REGISTRANT (Include ZIP code)		
Pop Coat, Inc. 436 7th Avenue Pittsburgh, PA 15219		
NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.		
On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.		
A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.		
Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.		
This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:		
1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.		
2. Make the labeling changes listed below before you release the product for shipment:		
a. Add the phrase "EPA Registration No. 60061-71."		
b. The Precautionary Statements "Keep Out of Reach of Children," "Warning," and "See Side Panel For Additional Precautionary Statements" must appear on the front panel (that part of the label seen by the customer at time of purchase). See Items (7), (7a), (7b), and (7c) of "The Label" enclosure.		
c. Give the drying time between the recommended two coats.		
d. The preferred/current company name and address must appear on the label (because the plant/manufacturing address is identified by the EPA Establishment Number).		
<input type="checkbox"/> ATTACHMENT IS APPLICABLE		
SIGNATURE OF APPROVING OFFICIAL		DATE

293

-2-

3. The accelerated storage and stability data for 30 days at 50 °C is acceptable on an interim basis. The 12-month storage and stability data is due upon completion.

4. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


A stamped copy of the label is enclosed for your records.

Johr. H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7504C)

Enclosures

BEST AVAILABLE COPY

Woolley's

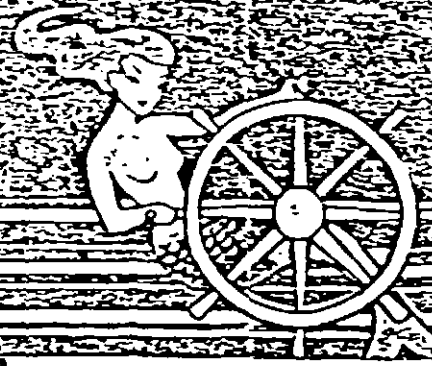

PREMIUM PERFORMANCE Antifouling Finish 709

KEEP OUT OF REACH
OF CHILDREN
WARNING
SEE BACK PANELS FOR
ADDITIONAL PRECAUTIONARY
STATEMENTS

ACTIVE INGREDIENT :	36.8%
Cuprous Oxide.....	63.2%
INERT INGREDIENTS:.....	100.0%

Contains Petroleum Distillates

Mfg. by Woolsey Manne Unit of Kop-Coat Newark, New Jersey
EPA Establishment No. 63061-NJ-2
EPA Registration No. 60061

BEST AVAILABLE COPY

Reg no: 60061-71

PM-31

373

PREMIUM PERFORMANCE Anti-Fouling Finish

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING sanding

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe dust or vapor. Wear a mask or respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Drink promptly a large quantity of milk, egg whites, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.
IF IN EYES: Flush with plenty of water. Get medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARD

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARD

COMBUSTIBLE: Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling. **NOTE:** When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mine Safety and Health Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR II.

PREPARATION: Scrape, wirebrush or sandpaper old surfaces to remove scum, contaminants or loose paint. On bare (unpainted) fiberglass, first scour and scrub with Woolsey's #625 Heavy Duty Fiberglass Cleaner or other strong abrasive agent. Rinse well with fresh water and allow to dry. Sand vigorously until all sheen on gel coat has been removed. Use 1/0 or No. 80 grit production paper. Wipe clean with rag moistened with mineral spirits.

PRIMING: On new or bare wood areas and on unpainted fiberglass prepared as directed above, apply first coat of this paint thinned 10%. On metal or aluminum keels, centerboards or other underwater fittings, prime these areas with 3 coats of 652/651 Hi-Guild Epoxy Primer, carefully following the label directions for the special primers.

APPLICATION: Mix thoroughly to uniform consistency by pouring off some of top portion into clean can - then stirring the remainder and gradually adding the portion removed. Apply generously and at full body with good bristle brush, using long even strokes. Stir occasionally during use to assure uniform suspension of toxicants in the vehicle.

NUMBER OF COATS: For initial application, 2 coats are recommended.

THINNING: Reduce 10% with Woolsey 403 Paint Thinner, or mineral spirits for brush use on bare surfaces - also for spray application. Otherwise apply this paint at full body thinning sparingly if necessary.

COVERAGE: 500 square feet per gallon.

LAUNCHING: Ready for use in four hours. Allow 3 days when an Epoxy Primer is used before launching.

GENERAL DESCRIPTION

Woolsey's Premium Antifouling provides maximum protection from fouling of all kinds. Concentrated copper guards against attachments of barnacles, annelids, funiculates, bryozoa, hydroids, algae, and other fouling organisms.

Woolsey's Premium Antifouling applies easily and dries quickly. May be used over old antifouling finishes in good condition.

Woolsey's Premium Antifouling is ideal for wood, fiberglass and properly primed metal boats.

STORAGE AND DISPOSAL

STORAGE: Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture or residue is a violation of Federal Law if these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

ACCEPTED

FOR COMMENTS
in EPA Letter Dated:

MAR 14 1989

BEST AVAILABLE COPY

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide
registered under EPA Reg. No.

60061-71