

60061-71

05/16/2013

1/6



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

Kop-Coat Inc.
3020 William Pitt Way
Pittsburgh, PA 15238

MAY 16 2013

Attention: Angie Custer
Regulatory Manager

Subject: Notification
Pettit Ultima SSA Antifouling Paint
EPA Reg. No. 60061-71
Application Dated April 11, 2013

This will acknowledge receipt of your notification for the aforementioned product labels, submitted under the provisions of FIFRA Section 3(c) (9). Based on a review of the submitted material, the following apply:

- Update Storage and Disposal Container Handling language, per PR Notice 2007-4

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been made a part of your file.

If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

A handwritten signature in black ink that reads "Marshall Swindell".

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510C)

Please read instructions on reverse before completing form.

Form Approved. OMB N. 270-0080. Approval expires 2-28-95



United States
Environmental Protection Agency
Washington, DC 20460

<input type="checkbox"/>	Registration
<input checked="" type="checkbox"/>	Amendment
<input type="checkbox"/>	Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 60061-71	2. EPA Product Manager Marshall Swindell	3. Proposed Classification <input type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Pettit Ultima SSA Antifouling Paint	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) Kop-Coat Inc. 3020 William Pitt Way Pittsburgh, PA 15238 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input checked="" type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		<input checked="" type="checkbox"/> Metal	
				<input type="checkbox"/> Plastic	
				<input type="checkbox"/> Glass	
				<input type="checkbox"/> Paper	
				<input type="checkbox"/> Other (Specify) _____	
* Certification must be submitted		If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt	No. per container
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions	
6. Manner in Which Label is Affixed to Product <input checked="" type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled				<input type="checkbox"/> Other _____	

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Angie Custer	Title Regulatory Affairs Specialist	Telephone No. (Include Area Code) (412) 826-3323
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Regulatory Affairs Specialist	
4. Typed Name Angie Custer	5. Date 4/11/13	

April 11, 2013

Document Processing Desk (AMEND)
Office of Pesticide Programs (7504P)
U.S. Environmental Protection Agency
1200 Pennsylvania Avenue, N.W.
Washington, DC 20460-001

RE: Pettit Marine Paint Ultima SSA Antifouling Paint 60061-71

Kop-Coat, Inc. wishes to submit an Amendment per PR Notice 2007-4 for the above referenced product. The Amendment consists of updated Storage and Disposal "Container Handling" instructions.

This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Enclosed please find:

- ✓ Completed application for Amendment/Notification EPA Form 8570-1
- ✓ 3 copies of Amended Label to be stamped for basic registration


Please contact me if you have any questions. I can be reached at 412-826-3323 or acuster@kop-coat.com

Sincerely,


Angie Custer
Angie Custer
Regulatory Affairs Specialist

Enclosures

cc: Ron Clawson
Frank Winkleman

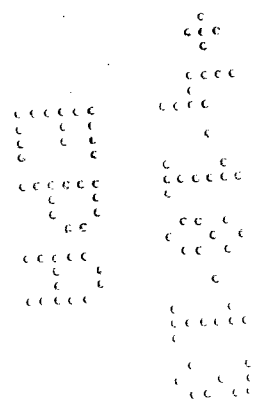

PETTIT



Ultima^{SS}

ANTIFOULING PAINT

1281 BLUE

- Economical Ablative Protection
- Smooth Finish
- Apply Over Most Other Antifouling
- Excellent For Fiberglass, Wood & Steel Boats

NET CONTENTS
1 GAL. (128 FL. OZ.)
3.785 LITERS

KEEP OUT OF REACH OF CHILDREN.

WARNING!

HARMFUL OR FATAL IF SWALLOWED. COMBUSTIBLE.
 SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.


NOTIFICATION
 Date Reviewed: _____
 Reviewed By: _____

NOTIFICATION
 Date Reviewed: 5/16/13
 Reviewed By: [Signature]

PETTIT ULTIMA SSA A

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe sanding dust or vapor. Wear a mask or a respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash clothing before reuse. Wash thoroughly with soap and water after handling.



FIRST AID	
IF SWALLOWED:	* Call a poison control center or doctor immediately for treatment advice. * Do not induce vomiting unless told to do so by a poison control center or doctor * Do not give any liquid to the person. * Do not give anything by mouth to an unconscious person.
IF IN EYES:	* Hold eye open and rinse slowly and gently with water for 15 - 20 minutes. * Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. * Call a poison control center or doctor for treatment advice.
IF ON SKIN OR CLOTHING:	* Take off contaminated clothing. * Rinse skin immediately with plenty of water for 15 - 20 minutes. * Call a poison control center or doctor for treatment advice.
IF INHALED:	* Move person to fresh air. * If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. * Call a poison control center or doctor for further treatment advice.
HOT LINE NUMBER: Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
NOTE TO PHYSICIAN: Contains petroleum distillate - vomiting may cause aspiration pneumonia.	

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE! Do not use or store near heat or open flame. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO2 or dry chemical. Wear MSHA/NIOSH certified breathing equipment.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage and disposal. Open dumping is prohibited. **STORAGE:** Store in a closed, properly labeled container in a cool place. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. **NOTE:** When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mine Safety and Health Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.

NOTICE! This product contains a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

Product Description: This product provides maximum protection from fouling of hulls. Concentrated copper guards against attachment of barnacles, annelids, tunicates, bryozoa, hydroids, algae and other fouling organisms. This product applies easily and dries quickly. May be used over old antifouling

ACTIVE INGREDIENTS:
Cuprous Oxide 37.5%

INERT INGREDIENTS:
62.5%

Total 100.00%



This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061-71

KOP-COAT, INC.
PETTIT PAINT BRAND
ROCKAWAY, NJ 07866

An **RPM** Company

50-582 gal 4/c
Cyan Mag Black

50-582 gal

ULTIMA SSA ANTIFOULING PAINT

ITS
IC ANIMALS
 1 skin. Avoid contact with skin, long-sleeved cotton shirt, long breathe sanding dust or vapor. Safety and Health Administration health. Remove contaminated by with soap and water after

finishes in good condition. This product is ideal for wood, fiberglass and properly primed steel boats.
Compatibility: This product may be applied over most aged hard and soft antifouling coatings. Old tin copolymers and teflon finishes must be completely removed before applying this product.
Mixing: It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.
Application Temperatures: 40°F and above.
Application Method: Brush, roller or airless or conventional spray.
Thinner: For the first coat on new or bare wood, thin 10% with Pettit 120/T-10 Brushing Thinner. For other uses thinning is not normally required. Do not thin beyond your states VOC limit.
Coverage: 500 sq. ft. per gallon.
Number of Coats: On new or bare wood use 3 coats, allowing at least 3 hours between applications. On old painted hulls in good condition and on primed steel or primed fiberglass, apply one full coat of this paint followed with a second coat where severe fouling exists as in tropical waters.

For treatment advice, contact your local poison control center or doctor.
 For 1 person.
 Rinse with water for 15 - 20 minutes. After 15 minutes, then continue rinsing eye. For further treatment advice.
 For 5 - 20 minutes. For further treatment advice.
 For first aid, then give artificial respiration, if necessary. For further treatment advice.
 For first aid, call a poison control center or doctor for emergency medical treatment.
 For first aid, use aspiration pneumonia.

Dry Times:

	To recoat	To launch
90°F	2 hours	2 hours
70°F	3 hours	4 hours
50°F	6 hours	8 hours

The above dry times are minimums. This product may be recoated and launched after minimum times shown. Maximum dry time before launch is 30 days @ 70°F.
VOC: 320 grams/liter (2.67 lbs/gallon) as supplied.
Maintenance of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. The self-cleaning nature of the coating is most effective when the boat is used periodically.

PAINT SYSTEMS

The paint systems outlined below contain references to other Pettit products. Please read and understand the label and/or Technical Bulletin for these products as well to ensure that they are used properly. For further guidance, please contact your local Pettit salesman or Pettit Customer Service Department at (800) 221-4466 between the hours of 8:30 a.m. and 4:30 p.m. EST

Previously Painted Surfaces: If the previous coating is in good condition, thoroughly sand with 80-grit production paper and wipe clean with a rag dampened with Pettit 120/T-10 Brushing Thinner to remove coating residue. Apply two coats of this product observing the proper dry times. If the previous coating is in poor condition, remove to the bare surface by sanding or using paint and varnish remover. Proceed with the appropriate bare system as described below. Old tin copolymer paints and teflon finishes must be removed before applying this product.

Bare Fiberglass: All bare fiberglass, regardless of age, must be thoroughly cleaned using Pettit 95 Fiberglass Dewaxer and clean lint-free rags. Several cleanings may be necessary to ensure complete removal of contaminants. Change rags frequently during the dewaxing/cleaning process to ensure complete removal of contaminants rather than merely smearing them on the surface. New boats must be scrubbed with a detergent and water solution and rinsed with fresh water prior to dewaxing. After the surface has been dewaxed, sand it thoroughly with 80-grit production paper and rewash the sanded surfaces with Pettit 95 Dewaxer or 120/T-10 Brushing Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If sanding is prohibited, as with certain vinyl-ester gelcoats, or is otherwise impractical, make sure the surface has been completely and thoroughly dewaxed and cleaned with Pettit 95 Fiberglass Dewaxer. Then apply one thin continuous coat of Pettit 6999 Sandless Primer. Topcoat with two coats of this product carefully following the topcoating instructions on the Sandless Primer label.

Bare Wood: Sand the entire surface with 80-grit production paper and wipe clean with a rag dampened with Pettit 120/T-10 Brushing Thinner. Apply a coat of this product thinned 10% with the Pettit 120/T-10 Brushing Thinner to penetrate and seal the wood. Fill any open seams with Pettit Seam Compound and allow to dry overnight. Apply two full coats of this product observing the proper dry times.

Steel Hulls, Underwater Metal Parts and Keels: For steel hulls and metal keels, consult Pettit Technical Bulletin TB431 High Build Epoxy Primer for complete priming instructions or consult the Pettit Technical Department or your local Pettit representative. For underwater metal parts, consult Technical Bulletin TB112 Underwater Running Gear Paint Specification for complete priming and application details.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

contaminate water by cleaning of boat during paint removal to enter water.
 Do not store near heat or open flame. Allow to dry. Use absorbent clean-up material. Wear MSHA/NIOSH approved respirator.

Open dumping is prohibited. Do not place. Keep closures tight and secure. In case of spillage, absorb and dispose.

Disposal of excess pesticide, spray canisters cannot be disposed of by use of municipal or environmental Control Agency, or the state for guidance.
 Do not refill this container. Offer for recycling after emptying. Triple rinse as directed or a mix tank and drain for 10 minutes and recap. Shake for 10 minutes and store for later use or repeat this procedure two more times.

Not inconsistent with its labeling. For safety, wear a respirator jointly with U.S. Bureau of Mines and by the provisions of 30 CFR II.
 California to cause cancer, birth defects or other reproductive harm.

Prevention of fouling of all kinds. Concentrated for use on fiberglass, steel and other. May be used over old antifouling.

MEDICAL EMERGENCIES: 1-800-548-0489
PRODUCT INFORMATION: 1-800-221-4466

MADE IN USA P3074 1281 GA - 08/08

04/05/13