

60061-86

7/14/2011

1/6

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, D.C. 20460



United States  
Environmental Protection  
Agency

Office of Pesticide Programs

JUL 14 2011

Kop-Coat, Inc.  
1850 Koppers Building  
Pittsburgh, PA 15219

Attention: Kim Treloar  
Product Registration Specialist

Subject: Pettit Marine Paint Antifouling 1933 Copper Bronze color  
EPA Registration No. 60061-86  
Your Notification Dated May 2, 2011  
EPA Received Date June 17, 2011

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9)

**Proposed Notification**

Alternate Brand Name: Pettit Unepoxy Antifouling Paint"

**General Comment**

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been made a part of your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,

A handwritten signature in black ink that reads "M. Swindell".

Marshall Swindell  
Product Manager (33)  
Regulatory Management Branch 1  
Antimicrobials Division (7510P)

**Kop-Coat, Inc.**

3020 William Pitt Way • Pittsburgh, PA 15238 • 412-826-3388 • FAX 412-826-3393

**KOP-COAT**

May 2, 2011

Mr. Marshall Swindell  
Document Processing Desk  
Office of Pesticide Programs, Registration Division (H7505c)  
U.S. Environmental Protection Agency  
Room S-4900, One Potomac Yard  
2777 South Crystal Drive  
Arlington, VA 22202-4501

**Subject: Notification of Additional Brand Name  
Notification of Label Change per PR Notice 2007-4  
Amendment to label with updated bullet points**

**RE: Pettit Marine Paint Antifouling 1933 Copper Bronze Color  
EPA Registration Number 60061-86**

Dear Mr. Swindell

Kop-Coat Wishes to propose to the primary label **Pettit Marine Paint Antifouling 1933 Copper Bronze Color stamped** with updated additional bullet points on the front panel.


Kop-Coat, Inc. wishes to submit a Notification of Additional Brand Name per PR Notice 98-10 and PR Notice 2007-4 for the above referenced product. The new name will be: **Pettit Unepoxy Antifouling Paint**


This notification is consistent with the provisions of PR Notice 2007-4 and PR Notice 98-10 EPA regulations at 40 CFR 152.46, and no other changes have been made to the labeling or confidential statement of formula of this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms for PR Notice 98-10 and 40 CFR 152.46, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Enclosed please find:

- Completed application for Amendment/Notification EPA Form 8570-1.**
- 3 copies of Amended Label to be stamped for basic registration.**

Please contact me if there are any questions or concerns, at (412) 826-3323 or email [ktreloar@kop-coat.com](mailto:ktreloar@kop-coat.com).

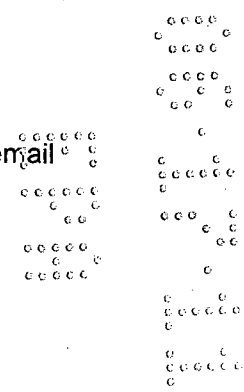

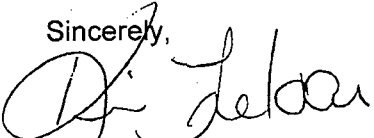Sincerely,  


Kim Treloar  
Regulatory Specialist  
Kop-Coat, Inc.

# PETTIT



DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Pettit Paint Company cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

## Antifouling 1933

### Copper Bronze Color

- Economical Antifouling Protection
- Hard Smooth Finish
- Apply Over Most Other Antifoulings
- Excellent for Fiberglass, Wood & Steel Boats
- Durable hard finish is able to withstand season-long use
- Contains the highest copper load in its class
- Dependable antifouling at an affordable price
- Excellent coverage, adhesion, and compatibility

#### ACTIVE INGREDIENT:

Cuprous Oxide 33.26%

INERT INGREDIENTS: 66.74%

TOTAL 100.00%

COPPER AS METALLIC 29.54%

This product contains petroleum distillates.

NET CONTENTS  
1 GAL. (128 FL. OZ.)  
3.785 LITERS

EPA EST. NO. 60061-NJ-2  
EPA REGISTRATION NO. 60061-86

KOP-COAT, INC.  
PETTIT PAINT BRAND  
ROCKAWAY, NJ 07866 An RPM Company

KEEP OUT OF REACH OF CHILDREN  
**WARNING**

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

**Maintenance of Antifouling Paint:** No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. We strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. This product is intended for use when the boat is used periodically.

**VOC:** (as supplied) 440 grams/liter maximum.

### PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**WARNING:** May be fatal if swallowed or inhaled. Do not breathe vapors, spray mist or sanding dust. Wear a NIOSH/MSHA certified mask or respirator. Contaminated clothing and wash clothing before reuse. Causes moderate eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. Wash thoroughly with soap and water after handling.

**Note:** When this product is used in confined areas or while spraying paint or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Occupational Safety and Health.

**Environmental Hazards:** This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips or sludge generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system without previously notifying the local sewage treatment authority. For guidance contact your State Water Board or Regional Office of the EPA.

**Physical or Chemical Hazards:** Combustible. Do not use or store near heat or open flame.

**Storage and Disposal:** Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) before emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to empty. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store in a separate container. Repeat this procedure two more times.

**NOTICE!** THIS PRODUCT CONTAINS A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR REPRODUCTIVE HARM.

### FIRST AID

**IF SWALLOWED:** • Call a poison control center or doctor immediately for treatment advice.

- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

**IF IN EYES:** • Hold eye open and rinse slowly and gently with water for 15-20 minutes.

**General Description:** This product has long been the standard bottom paint for many boatyards and boat owners. It is a dependable antifouling paint form provide outstanding protection against algae, barnacles, and other marine and freshwater fouling organisms at a very affordable price. Its durable, hard moc finish is able to withstand beaching, trailering, and season long abuse. It provides excellent coverage and adhesion, and can be applied over most bottom pa condition.

### DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**Coverage, Application and Temperature:** This product can be applied by brush, roller or spray. All painting should be done between 2:00 a.m. and 4:00 avoid the possibility of dew or condensation spoiling the application. The temperature range of application should be between 50 and 90°F. At least two, ar three coats, should be applied for best performance, particularly in high wear areas such as the waterline. This product will cover approximately 400 square when applied at 2 dry mills film thickness.

**Preparation of Paint:** It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before usin sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, f the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

**Thinning:** Use Pettit 120/T-10 Brushing Thinner for thinning this product if needed, particularly on warm or breezy days. Do not thin more than 10% (12 c gallon) or inadequate paint film thickness will occur and premature erosion of the finish will be likely.

**Note:** Do not thin beyond your state's compliant limit.

**Dry Times:** The minimum recoat time is 2 hours. The minimum dry time between the final coat and launching is 24 hours. Under adverse drying conditior encountered on cool or damp days extend the dry times by 50% in order to ensure that all the solvent is out of the paint film. There is no maximum dry tim launching.

### SYSTEMS

**Previously Painted Surfaces:** Do not apply this product over ablative bottom paints. If the previous coating is in good condition, thoroughly sand with 80- then solvent clean with Pettit 120/T-10 Brushing Thinner to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poo. remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.

**Bare Fiberglass:** All bare fiberglass, regardless of age, should be thoroughly cleaned and de-waxed with 92 Bio-Blue Hull Surface Prep or de-waxed sever Pettit D-95 De-waxer. Sand thoroughly with 80 grit sandpaper to a dull, frosty finish and rewash the sanded surface with 120 Brushing Thinner to remove : residue. Then apply two or three coats of this product, following application instructions.

To eliminate the sanding operation, two methods are available:

1. Clean and de-wax the surface as described above, apply one very thin coat of 6998 Skip-Sand Primer using a 3/16" or less nap roller or brush, apply. C primer label for complete application and antifouling top coating instructions. Then 2 to 3 coats of this product
2. Clean, de-wax and etch the surface with 92 Bio-Blue Hull Surface Prep using a course Scotch-Brite pad in a swirling motion. Apply one coat of Pettit F Primer. Consult the primer labels for complete application and antifouling top coating instructions. Then apply 2 to 3 coats of this product.

**Underwater Running Gear:** Use Pettit 6456 Underwater Metal Kit following all instructions before applying this product.

**All Other Substrates:** Please go to [www.pettitpaint.com](http://www.pettitpaint.com) and consult the product data sheet

- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

**IF ON SKIN OR**

- Take off contaminated clothing.

**CLOTHING:**

- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.
- Move person to fresh air.

**IF INHALED:**

- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible.
- Call a poison control center or doctor for further treatment advice.

**Hot Line Number:** Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.

**Note To Physician:** Probable mucosal damage may contraindicate the use of gastric lavage. This product contains petroleum distillates. Vomiting may cause pneumonia.

**Medical Emergencies:** 1-800-548-0489

**Product Information:** 1-800-221-4466 or [WWW.PETTITPAINT.COM](http://WWW.PETTITPAINT.COM)

MADE IN USA P3217 1933 GA 04/11