

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



United States
Environmental Protection
Agency

Office of Pesticide Programs

Kop-Coat Inc.
3020 William Pitt Way
Pittsburgh, PA
15238

JUN 5 2013

Attention: Angie Custer

Subject: Pettit Hydrocoat Ablative Antifouling Paint 1240 Blue
EPA Registration No: 60061-87
Notification Dated: April 11, 2013

This will acknowledge receipt of your notification, submitted under the provisions of Federal Insecticide, Fungicide and Rodenticide Act, FIFRA Section 3(c) (9).

Proposed Notification

- To revise Storage and Disposal statement per PR Notice 2007-4

General Comments

Base on a review of the submitted material, the following comments apply:

The Notification dated April 11, 2013, to update "**Container Handling Instructions**" is in compliance with PR Notice 2007-4 and is acceptable. This information has been added to your file. This letter supersedes the letter dated May 17, 2013.

If you have any questions concerning this letter, please contact Zebora Johnson at (703) 308-7080.

Sincerely

Marshall Swindell
Product Manger (33)
Regulatory Management Branch I
Antimicrobial's Division (7501P)



United States
Environmental Protection Agency
Washington, DC 20460

<input type="checkbox"/>	Registration
<input checked="" type="checkbox"/>	Amendment
<input type="checkbox"/>	Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 60061-87	2. EPA Product Manager Marshall Swindell	3. Proposed Classification <input type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Pettit Hydrocoat Ablative Antifouling Paint	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) Kop-Coat Inc. 3020 William Pitt Way Pittsburgh, PA 15238 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input checked="" type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		<input checked="" type="checkbox"/> Metal	
	If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt	No. per container	<input type="checkbox"/> Plastic
					<input type="checkbox"/> Glass
					<input type="checkbox"/> Paper
					<input type="checkbox"/> Other (Specify) _____
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions	
6. Manner in Which Label is Affixed to Product <input checked="" type="checkbox"/> Lithograph Paper glued Stenciled			<input type="checkbox"/> Other _____		

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Angie Custer	Title Regulatory Affairs Specialist	Telephone No. (Include Area Code) (412) 926-3323
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Regulatory Affairs Specialist	
4. Typed Name Angie Custer	5. Date 4/11/13	

April 11, 2013

Document Processing Desk (AMEND)
Office of Pesticide Programs (7504P)
U.S. Environmental Protection Agency
1200 Pennsylvania Avenue, N.W.
Washington, DC 20460-001

RE: Pettit Hydrocoat Ablative Antifouling Paint 60061-87

Kop-Coat, Inc. wishes to submit an Amendment per PR Notice 2007-4 for the above referenced product. The Amendment consists of updated Storage and Disposal "Container Handling" instructions.

This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.


Enclosed please find:

- ✓ Completed application for Amendment/Notification EPA Form 8570-1
- ✓ 3 copies of Amended Label to be stamped for basic registration

Please contact me if you have any questions. I can be reached at 412-826-3323 or acuster@kop-coat.com

Sincerely,


Angie Custer
Angie Custer
Regulatory Affairs Specialist

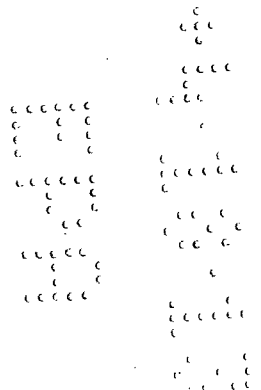

Enclosures

cc: Ron Clawson
Frank Winkleman

PETTIT



DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Pettit Paint Company cannot guarantee this product's suitability for your particular purpose or application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

HYDROCOAT

ABLATIVE ANTIFOULING PAINT 1240 BLUE

- Multi-Seasonal
- Easy Cleanup
- Excellent for Fiberglass, Wood and Steel Boats
- Reduces Paint Buildup Through Controlled Erosion

KEEP OUT OF REACH OF CHILDREN

WARNING!


CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN.
MAY BE FATAL IF SWALLOWED OR INHALED.
SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

NET CONTENTS
1 GAL. (128 FL. OZ.)
3.785 LITERS

NOTIFICATION
Date Reviewed: 5/17/18
Reviewed By: [Signature]

**PETTIT MARINE PAINT HYDROCOAT ABLATIVE ANTIFOULING PAINT
PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

WARNING: Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapors, spray mist or sanding dust. While spraying and/or sanding boat surfaces, wear a MSHA/NIOSH certified mask or respirator. Remove contaminated clothing and wash clothing before reuse. Wash thoroughly with soap and water after handling.



**VOC: 150 grams/liter
(1.25 lbs/gal) maximum**

**MEDICAL EMERGENCIES: 1-800-548-0489
PRODUCT INFORMATION: 1-800-221-4466**



ACTIVE INGREDIENT:
Cuprous Oxide 40.34%
INERT INGREDIENTS: 59.66%
Total 100.00%

This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061-87

KOP-COAT, INC.
PETTIT PAINT BRAND
ROCKAWAY, NJ 07866

An **RPM** Company

FIRST AID	
IF SWALLOWED:	<ul style="list-style-type: none"> • Call a poison control center or doctor immediately for treatment advice. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give any liquid to the person. • Do not give anything by mouth to an unconscious person.
IF IN EYES:	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15 - 20 minutes. • Call a poison control center or doctor for treatment advice.
IF INHALED:	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
HOT LINE NUMBER: Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
NOTE TO PHYSICIAN: Contains petroleum distillate - vomiting may cause aspiration pneumonia.	

ENVIRONMENTAL HAZARDS

Material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes or allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.
PHYSICAL OR CHEMICAL HAZARDS: Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires blanket flames with foam, CO₂ or dry chemical.

STORAGE & DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.
STORAGE: Store in a closed, properly labeled container in a cool place. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

GENERAL DESCRIPTION

PETTIT MARINE PAINT HYDROCOAT ABLATIVE ANTIFOULING PAINT is an antifouling protective coating resistant to algae, barnacles and other marine and freshwater fouling organisms. The high technology, water based resins used in this product make it a state-of-the-art antifouling paint that withstands frequent trailering, beaching and launching while offering excellent antifouling protection. This product contains FTE resulting in an easily bur-nished, slick film for maximum hull speed. This product is for boats and vessels only.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
PREPARATION OF SURFACE: The surface to be painted must be clean, dry and free of any contamination or foreign matter. Prepare the surface by sanding thoroughly and solvent cleaning to remove sanding residue. When sanding old antifouling paints use a dust mask to prevent the inhalation of sanding dust.

50-471 gal 4/c
Cyan Mag Black

50-471 gal

Steel Can Trim
Plastic Can Trim

**7E ANTIFOULING PAINT
FOR BOATS AND DOMESTIC ANIMALS**

Avoid contact with skin, eyes or clothing. Wear pants and hat. May be fatal if swallowed or sprayed and/or sanded boat surfaces, wear a clothing and wash clothing before reuse. Wash

Immediately for treatment advice. So by a poison control center or doctor.
Unconscious person. Rinse with water for 15-20 minutes. For first 5 minutes, then continue rinsing eye. For treatment advice.
For 15 - 20 minutes. For treatment advice.
Ambulance, then give artificial respiration. For further treatment advice.
Poison control center or doctor, or going for medical treatment information.
Asphyxiation.

DISPOSAL
Proper disposal of wastes or allow chips and debris in an approved landfill. Avoid during mixing, application and drying. Use water, CO₂ or dry chemical.

Open dumping is prohibited. Keep closures tight and upright to prevent spillage, absorb and dispose of in accordance with local, state or federal regulations. For excess pesticide, spray mixture or use as directed by use according to label instructions, or the Hazardous Waste Representative.
Do not refill this container. Offer for recycling, if available. Triple rinse as follows: Empty the container for 10 seconds after the flow begins. Rinse for 10 seconds. Pour rinsate into application container or a clean container and use for its intended purpose. Rinse for 10 seconds after the flow begins.

NOTICE
This is an antifouling protective coating resistant to abrasion. The high technology, water based resins used in this product withstands frequent trailering, beaching and storage. The product contains PTFE resulting in an easily cleaned hull and vessels only.
Compatible with its labeling. Keep clean, dry and free of any contamination or foreign matter. Clean to remove sanding residue. When sanding dust.

APPLICATION AND TEMPERATURE: This product can be applied by brush, roller or spray. When brushing, use a good quality synthetic (nylon) bristle brush. Flow the product on, then brush it out. When rolling, use a short nap roller. If spraying thin with water up to 10% if necessary. Otherwise, thinning is not recommended. Two coats are recommended for best performance. Do not apply at temperatures below 50°F.

PREPARATION OF PAINT: This product contains cuprous oxide. As a result, there is a tendency for settling to occur, especially if the paint has been on the shelf for several months. It is necessary to thoroughly mix the paint before using. A mechanical paint shaker will do the fastest, most thorough job of mixing. If mixing is to be done with a wooden paddle or electric drill mixer, pour off half of the liquid from the top of the can and then properly mix in any settled pigment. Then remix the two parts together thoroughly. Regardless of mixing method, check the sides and bottom of the can before and during use to make sure all pigments and toxicants are thoroughly mixed.

DRY TIMES: Use the recommended dry times shown below as a guide.

	To Recoat (min)	To Launch (min)	Remember, this is only a guide. Dry times will vary with environmental conditions. If unsure of the dry time, it is safer to launch later rather than earlier. There is no maximum dry time before launching.
50°F	4 Hours	48 Hours	
70°F	2 Hours	16 Hours	
90°F	1 Hour	12 Hours	

COVERAGE: This product will cover approximately 400 sq. ft. per gallon.
CLEAN-UP: Use clean water for cleaning equipment.

MAINTENANCE OF ANTIFOULING PAINT: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extremely hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked several times a month to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. The self cleaning nature of the coating is most effective when the boat is used periodically.

PAINT SYSTEMS

PREVIOUSLY PAINTED SURFACES: To paint old, hard antifouling, TEFLON® based antifouling or old tin copolymer antifouling, sand thoroughly with 80 grit sand paper and wipe the surface to remove sanding residue with a damp rag. Then apply two coats of this product. Traditional, soft antifouling must be removed before applying this product. Old paint in poor condition (flaking, peeling, cracking, etc.) must be removed to the bare surface by sanding or using an appropriate paint and varnish remover. Then follow the appropriate bare system shown below.

BARE FIBERGLASS: Wash the fiberglass thoroughly with Pettit 95 Fiberglass Dewaxer, changing rags frequently to ensure removal of parting agents, wax, grease and dirt. Sand thoroughly with 80 grit sandpaper to a dull frosty finish. Rewash with Pettit 95 Fiberglass Dewaxer to remove sanding residue and then apply two coats of this product. To avoid the tedium of sanding, wash the fiberglass TWICE with Pettit 95 Fiberglass Dewaxer, then apply one thin coat of Pettit 6999 Sandless Primer. Let dry until tacky to the touch (usually 1-3 hours depending on temperature and humidity) and then apply the first coat of this product. Remember, do not let the Sandless Primer dry hard.

BARE WOOD: Bare wooden hulls should be thoroughly sanded with 80 grit sandpaper and then wiped clean of sanding residue. A primer coat of Pettit 6627 Tie Coat Primer should be applied directly to bare wood. Allow to dry 4 hours, then apply two unthinned coats of this product per instructions.

BARE STEEL: Sandblast or disc sand with coarse grit sandpaper to a clean, bright surface. Use compressed air or clean brush to remove residue. Apply two coats of Pettit 4700/4701 Hi-Build Epoxy Primer. Consult the individual product tech sheets for detailed application instructions. Follow with two coats of this product.

RUBBERIZED FABRIC SURFACES: Wash the rubberized fabric surfaces to be painted with a mild detergent and water solution. Rinse thoroughly with copious amounts of clean fresh water and allow to dry thoroughly. Pour a moderate amount of Pettit 97 Epoxy Thinner onto a bronze wool pad. Choose a small area on the surface to be painted and scrub the surface lightly but thoroughly, making sure the surface is completely wetted by the 97 Epoxy Thinner. Wipe off any excess 97 Epoxy Thinner with a clean rag before it is allowed to dry and repeat the process until the entire surface to be painted has been scrubbed and wiped clean. NOTE: If the 97 Epoxy Thinner is spilled or runs down the side of the inflatable boat, wipe up the spill or runs immediately. While the 97 Epoxy Thinner is generally safe on most surfaces, it may dull the gloss of paint or mar the surface of the inflatable boat if allowed to remain in contact with the surface.

To facilitate the scrubbing process, the Pettit 97 Epoxy Thinner may be poured into a small container and the bronze wool pad dipped into it. Change the 97 Epoxy Thinner frequently to avoid using excessively dirty or contaminated material. Spent material should be disposed of, not reused.

Once the surface to paint has been properly prepared, apply a generous coat of this product. Allow the paint to dry to recoat and apply a full second coat. Consult the dry to recoat/dry to launch time-temperature chart above for specific recoat and launch times.

NOTE: All antifouling paints may leave a stain if left in contact with other objects. When the boat is pulled out of the water for storage on deck or on a dock, clothing, deck and dock surfaces coming in contact with the antifouling paint may experience staining if rubbed against the antifouling paint.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

MADE IN USA P3213 1240 GA.-06/07

71 gal

04/08/13