



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

November 19, 2019

Sandy Lea
Pesticide Registrar
Kop-Coat Inc.
36 Pine Street
Rockaway, NJ 07866

Subject: Label Amendment – Updated First Aid and minor directions for use changes
Product Name: Pettit Marine Paint Ultima SR Ablative Dual Biocide Antifouling
Bottom Paint
EPA Registration Number: 60061-94
Application Date: August 9, 2019
Decision Number: 554254

Dear Mr. Lea:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. “To distribute or sell” is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance

Page 2 of 2
EPA Reg. No. 60061-94
Decision No. 554254

with FIFRA section 6. If you have any questions, please contact Tara Flint via email at flint.tara@epa.gov.

Sincerely,

A handwritten signature in blue ink that reads "E. Miederhoff". The signature is written in a cursive style with a large initial "E".

Eric Miederhoff
Product Manager 31
Regulatory Management Branch I
Antimicrobials Division (7510P)
Office of Pesticide Programs

Enclosure



Ultima ^{SR}

ABLATIVE DUAL BIOCIDES

ANTIFOULING BOTTOM PAINT


- [Slime resistant.]
- [High copper content.]
- [Multi-season technology.]
- [Self-polishing.]
- Long-term protection
- [Reduces paint build-up through controlled erosion.]
- [Effective in worst tropical conditions.]
- [Hard finish, easily burnished.]
- [Excellent for fiberglass, wood and steel boat.]

[1297 Blue, 1397 Green, 1697 Red, 1897 Black, Black, Blue, Red, Green, 1082 Blue, 1083 Green, 1086 Red, 1088 Black, 1277 Blue, 1377 Green, 1677 Red, 1877 Black, BP 90 Red, BP 91 Blue, BP 94 Black, 633-1022 Blue, 633-1023 Green, 633-1026 Red, 633-1028 Black]

NET CONTENTS
1 GAL. (128 FL. OZ.)
3.785 LITERS

COMMERCIAL AND NON-COMMERCIAL USE
KEEP OUT OF REACH OF CHILDREN
CAUTION

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

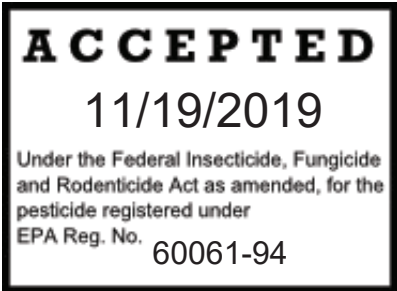

ACTIVE INGREDIENTS:
Cuprous Oxide* (CAS# 1317-39-1) 60.00%

N-Cyclopropyl-N'(1,1-dimethyl ethyl)-6-(methylthio)-1,3,5-triazine-2,4-diamine (CAS# 28159-98-0) 2.00%

OTHER INGREDIENTS: 38.00%
Total 100.00%

*Metallic copper equivalent 53.29%

Contains petroleum distillates, xylene or xylene range aromatic solvents.

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061-94

KOP-COAT, INC.
36 PINE STREET
ROCKAWAY, NJ 07866

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

CAUTION: Causes moderate eye irritation. Avoid contact with eyes, skin or clothing. Wear protective eyewear, long sleeved shirt, long pants and shoes plus socks. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. **USER SAFETY RECOMMENDATIONS:** Remove clothing/PPE immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Remove PPE immediately after handling this product.

USER SAFETY REQUIREMENTS

While removing existing paint by sanding or blasting, or applying new antifoulants paint, commercial users must wear A half face NIOSH approved respirator (TC-84A) with organic vapor cartridges and R or P combination filters; **OR** a full face NIOSH approved respirator (TC-84A) with organic vapor cartridges and any R or P combination filters; a NIOSH approved gas mask (TC-14G) with an Organic Vapor Canister and HE Filter; **OR** a NIOSH approved powered air purifying respirator (TC-23C) with an organic vapor cartridge and HE filter.

Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions for washables exist, use detergent and hot water. Keep and wash PPE separately from other laundry. Discard clothing and other absorbent material that have been drenched or heavily contaminated with the product's concentrate. Do not reuse them. As soon as possible, wash thoroughly and change into cleanclothing.

FIRST AID	
IF IN EYES	<ul style="list-style-type: none"> Hold eye open and rinse slowly and gently with water for 15-20minutes. Remove contact lenses, if present after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	<ul style="list-style-type: none"> Do not give anything by mouth to an unconscious person. Do not give any liquid to the person. Do not induce vomiting unless told to do so by a poison control center or doctor. Call a poison control center or doctor immediately for treatment advice.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20minutes. Call a poison control center or doctor for treatment advice.
IF INHALED:	<ul style="list-style-type: none"> Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.
HOT LINE NUMBER	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
NOTE TO PHYSICIAN	
Contains petroleum distillate. Vomiting may cause aspiration pneumonia.	

ENVIRONMENTAL HAZARDS

This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS: COMBUSTIBLE. Do not use or store near heat or open flame. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO₂ or dry chemical.

STORAGE & DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited.

Pesticide Storage: Store in a closed, properly labeled container in a cool place. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.

Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

Container Handling: Non-refillable container. Do not reuse or refill this container. Prior to container disposal, allow any remaining paint residue in the container to dry. Dispose of the container in accordance with Federal, State or local disposal regulations.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Product Description: This product is an antifouling protective coating resistant to slime, algae, barnacles and other marine fouling organisms. The high loading of cuprous oxide combined with an organic algicide offers unprecedented control over all types of fouling even in the most severe fouling areas. This products unique controlled erosion minimizes coating build-up and keeps underwater surfaces smooth and clean.

Surface Preparation: The surface to be painted should be dry, clean and free of any contaminants. It should be properly prepared by solvent cleaning and sanding before any primers or paints are applied. Follow the recommended systems below. When sanding old antifouling paint, always wear Personal Protective Equipment (PPE) as described above to prevent the inhalation of sanding dust.

Preparation of Paint: This product is heavily loaded with cuprous oxide. As a result of this loading there is a tendency for settling to occur especially if the paint has been on the shelf for several months. It is necessary to thoroughly mix the paint before using. If possible, shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Application Temperatures: 40°F to 90°F.

Application Method: Brush, roller or spray.

Thinner: Use [Pettit 120 Brushing] Thinner for brush or roller applications. Use [Pettit 121 Spraying] Thinner for spray application. In either case do not thin more than 5% by volume. Use [either] thinner for clean-up.

Coverage: This product covers approximately 400 square feet per gallon when applied at 2 dry mils film thickness.

Number of Coats: Two coats should be applied for best antifouling protection. Do not apply this product if rain or dew is expected before the surface has dried completely.

Dry Times:	To recoat	To launch
90°F	2 hours	4 hours
70°F	4 hours	8 hours
50°F	6 hours	16 hours

The above dry times are minimums. This product may be recoated and launched after the minimum times shown. There is no maximum time before launching.

Entry Restriction: Do not enter or allow others to enter the application area until sprays have dried.

VOC: 299 grams/liter max. as supplied

Maintenance of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. The self-cleaning nature of the coating is most effective when the boat is used periodically. Boats and vessels should not be scrubbed or cleaned for the first six months in the water and at intervals of not less than 3 months thereafter.

SYSTEMS

Mix paint thoroughly to ensure toxicants are evenly dispersed throughout the can. All surfaces must be clean, dry and properly prepared prior to painting.

Compatibility: This product may be applied over most aged hard antifouling coatings. Old soft antifouling paints must be completely removed before applying this product. Old tin copolymers must be removed completely or sealed with [Pettit 6627 Tie-Coat] Primer before applying this product. [The paint systems outlined below contain references to other Pettit products.] Please read and understand the label and/or Technical Bulletin for these products as well to ensure that they are used properly.

Previously Painted Surfaces: If the previous coating is in good condition thoroughly sand with 80 grit paper and wipe clean with a rag dampened with [Pettit 120 Brushing] Thinner to remove sanding residue. Apply two coats of this product observing the proper dry times. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using paint and varnish remover. Proceed with the appropriate bare system as described below.

Bare Fiberglass: All bare fiberglass, regardless of age, must be thoroughly cleaned and de-waxed with [Pettit 92 Bio-Blue Hull] Surface Prep or de-waxed several times with [Pettit D95] Dewaxer. Sand thoroughly with 80 grit sandpaper to a dull, frosty finish and rewash the sanded surface with 120 Brushing Thinner to remove sanding residue. Then apply two coats of this product, following application instructions.

To eliminate the sanding operation, clean, de-wax and etch the surface with 92 Bio-Blue Hull Surface Prep using a coarse Scotchbrite® pad. Clean off all residue by rinsing or wiping off with fresh water. Apply one coat of Pettit Protect Epoxy Primer 4700/4701. Consult the primer labels for complete application and antifouling top-coating instructions. Then apply two coats of this product.

Bare Wood: Sand the entire surface with 80 grit production paper and wipe clean with a rag dampened with [120 Brushing] Thinner. Apply a coat of this product thinned 25% with [120 Brushing] Thinner to penetrate and seal the wood. Fill any open seams with [Pettit] Seam Compound and allow to dry overnight. Apply two full coats of this product observing the proper dry times.

Steel Hulls, Underwater Metal Parts and Keels: For steel hulls and metal keels, consult [Pettit] Technical Bulletin [TB431 High Build Epoxy Primer] for complete priming instructions or consult the [Pettit] Technical Department or your local [Pettit] representative. For underwater metal parts, consult the Technical Bulletin [TB112 Underwater Running Gear Painting] Specification for complete priming and application details.

All Other Substrates: Please consult the product data sheet.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

MEDICAL EMERGENCIES: 1-800-548-0489

Manufactured in the U.S.A. P3248 GA.-9/15

PRODUCT INFORMATION: 1-800-221-4466 [or] [WWW.PETTIT PAINT.COM]