

KOP-COAT

WOODLIFE® II Stain and Wood Preservative

[Water Repellent]
[With Water Repellent]
[For Pressure-Treated and Untreated Wood]
[3-way Protection in One Coat]

Mildew protection
Penetrating preservative protection against decay fungi
Water-repellent surface protection

Clear
Paintable and Stainable

Keep Out Of Reach Of Children CAUTION

See [back][side] panel for additional Precautionary Statements.

Read "limit of warranty and liability" before buying or using. If such terms are not acceptable, return at once unopened.
EPA Reg. No. 60061-105
EPA Est. No. _____

Active Ingredient:
3-Iodo-2-Propynyl
Butyl Carbamate..... 0.5%
Inert Ingredients..... 99.5%
Total..... 100.0%

ACCEPTED
OCT 24 2001
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 60061-105

Kop-Coat, Inc.
Protection Products Division
5137 Southwest Avenue, St. Louis, MO 63110
314/772-2200

NET CONTENTS ONE U.S. GALLON (3.78 LITERS)

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION. Harmful if swallowed, absorbed through skin or inhaled. Avoid contact with eyes, skin or clothing. Do not breathe vapor or spray mist. Wash thoroughly with soap and water after handling.

PPE FOR COMMERCIAL USERS

Applicators and other handlers must wear:

- long-sleeved shirt and long pants
- chemical resistant gloves (such as barrier laminate, nitrile rubber, neoprene rubber and viton)
- shoes plus socks

Follow manufacturers' instructions for cleaning/maintaining PPE. If no such instructions exist for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

USER SAFETY RECOMMENDATIONS

Residential Users should:

- remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.

Commercial Users should:

- wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet.
- remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.
- remove personal protective equipment immediately after handling this product. Wash the outside of gloves before removing. As soon as possible wash thoroughly.

FIRST AID

IF IN EYES:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice

IF SWALLOWED:

- Call poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by the poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

IF ON SKIN OR ON CLOTHING:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

IF INHALED:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

Have the product container or label with you when calling a poison control center or doctor, or going for treatment. In case of emergency call toll free: 1-800-548-0489.

NOTE TO PHYSICIAN:

Probable mucosal damage may contraindicate the use of gastric lavage.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to any body of water or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment washwaters or rinsate. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other water unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage and disposal.

STORAGE: Do not store near excessive heat. Keep contents away from food.

DISPOSAL: Residential Users- Do not reuse container. Securely wrap original container in several layers of newspaper and discard in trash. **Commercial Users-** Pesticide Disposal: Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility. Container Disposal: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke

60061-105

10/24/2001

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

GENERAL PRECAUTIONS AND RESTRICTIONS:

Residential Users: Do not apply this product in a way that will contact any person or pet.

Commercial Users: Do not apply this product in a way that will contact workers or other persons.

DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD.

DO NOT USE ON WOOD WHICH WILL COME IN CONTINUOUS CONTACT WITH SKIN UNLESS THE WOOD IS SEALED WITH PAINT, VARNISH OR SHELLAC AFTER TREATMENT.

Apply this product only as specified on the label.

Keep container closed when not in use.

Wear goggles, rubber gloves and protective clothing when applying or handling treated lumber.

Use only in a well ventilated area.

Keep contents and freshly treated articles away from food and living plants.

GENERAL INFORMATION:

Product Information: Reduces swelling and shrinking. Protects against mildew, decay, rot and stain. Odorless when dry.

Easy water clean up. Dries in 48 hours. Will not crack, peel or blister. Can be painted, stained or finished. [Low VOC/VOS water based formula.] [Colorless when dry.] [Finishes cover easier... last longer.]

Uses: A water repellent preservative for use on plywood, hard board, flake board, dimensional lumber, manufactured wood items and siding. Use where a degree of dimensional stabilization, preservative qualities and paintability are required for above ground application.

Preparation: All cutting, gluing and sanding should be done before applying WOODLIFE® II Stain and Wood Preservative. Wood must be clean, dry and free from foreign material. Do not use over previously finished or stained wood without stripping off old finish. Do not use steel wool.

APPLICATION INSTRUCTIONS:

Application:

1. This product must be applied outdoors to wood intended only for exterior use.
2. Stir well before using.
3. Temperature of lumber and WOODLIFE® II Stain and Wood Preservative should be 40°F (4.4°C) or above.
4. Treating may be done by roller coating, brushing to refusal or flood spraying.
5. Flood wood with solution until puddles remain on the surface.
6. Coat side and end grain with 3 or more consecutive coats to give full protection.
7. Any surface cut after first treatment should be retreated.
8. Protect vegetation from overspray.

By following these application directions, effective control can be obtained against decay fungi (like brown or white rot), staining fungi (like blue stain), surface mold (like black, brown or other colored mildew) and dimensional change.

Coverage: 150 sq. ft. (14 sq. m.) -250 sq. ft. (23 sq. m.) per gallon brush or roller application.

Drying Time: A minimum of 48 hours air drying is required before finishing, depending on conditions and method of application. On humid days, longer time may be required.

Thinning: No thinning is required.


Clean Up: Use water to remove WOODLIFE® II Stain and Wood Preservative from all surfaces, brushes and rollers. Mineral spirits or Derusto® Minute-Solv® Thinner No. 5 may be required to remove dried product from glass and other areas.

LOW VOC/VOS WATER-BASED FORMULA

Volatile Organic Compounds (VOC) do not exceed 350 grams per liter, less water and less exempt solvent. This product contains a maximum of 2.92 pounds of VOS per gallon of coating.

LIMITED WARRANTY

Buyer assumes all risks of use, handling and storage of product not in strict accordance with label directions. No express warranties are given. Should defect occur, seller's sole liability is to replace product or refund purchase price. ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR USE IS LIMITED TO ONE YEAR FROM DATE OF PURCHASE. LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGE OR LOSS IS SPECIFICALLY EXCLUDED AT ALL TIMES. If used for other than personal, family or household purposes, any implied warranty MERCHANTABILITY OR FITNESS FOR PARTICULAR USE is excluded.

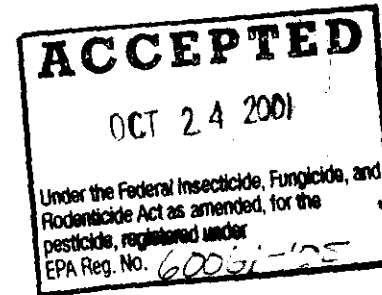

2/2