

60061-116

5/16/2013

1/6



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

Kop-Coat Inc.
3020 William Pitt Way
Pittsburgh, PA 15238

MAY 16 2013

Attention: Angie Custer
Regulatory Manager

Subject: Notification
Pettit Vivid Antifouling Paint
EPA Reg. No. 60061-116
Application Dated April 11, 2013

This will acknowledge receipt of your notification for the aforementioned product labels, submitted under the provisions of FIFRA Section 3(c) (9). Based on a review of the submitted material, the following apply:

- Update Storage and Disposal Container Handling language, per PR Notice 2007-4

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been made a part of your file.

If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

A handwritten signature in black ink that reads "Marshall Swindell".

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510C)

Please read instructions on reverse before completing form.

Form Approved. OMB No. 2070-0080. Approval expires 2-28-95



United States
Environmental Protection Agency
Washington, DC 20460

<input type="checkbox"/>	Registration
<input checked="" type="checkbox"/>	Amendment
<input type="checkbox"/>	Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 60061-116	2. EPA Product Manager Marshall Swindell	3. Proposed Classification <input type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Pettit Vivid Antifouling Paint	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) Kop-Coat Inc. 3020 William Pitt Way Pittsburgh, PA 15238 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3)(b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input checked="" type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		<input checked="" type="checkbox"/> Metal	
				<input type="checkbox"/> Plastic	
				<input type="checkbox"/> Glass	
				<input type="checkbox"/> Paper	
				<input type="checkbox"/> Other (Specify) _____	
* Certification must be submitted		If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt	No. per container
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/>	
6. Manner in Which Label is Affixed to Product <input checked="" type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled				<input type="checkbox"/> Other _____	

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Angie Custer	Title Regulatory Affairs Specialist	Telephone No. (Include Area Code) (412) 826-3323
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Regulatory Affairs Specialist	
4. Typed Name Angie Custer	5. Date 4/11/13	

April 11, 2013

Document Processing Desk (AMEND)
Office of Pesticide Programs (7504P)
U.S. Environmental Protection Agency
1200 Pennsylvania Avenue, N.W.
Washington, DC 20460-001

RE: Pettit Marine Paint Vivid Antifouling Paint 60061-116

Kop-Coat, Inc. wishes to submit an Amendment per PR Notice 2007-4 for the above referenced product. The Amendment consists of updated Storage and Disposal "Container Handling" instructions.

This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Enclosed please find:

- ✓ Completed application for Amendment/Notification EPA Form 8570-1
- ✓ 3 copies of Amended Label to be stamped for basic registration

Please contact me if you have any questions. I can be reached at 412-826-3323 or acuster@kop-coat.com


Sincerely,




Angie Custer
Regulatory Affairs Specialist

Enclosures

cc: Ron Clawson
Frank Winkleman

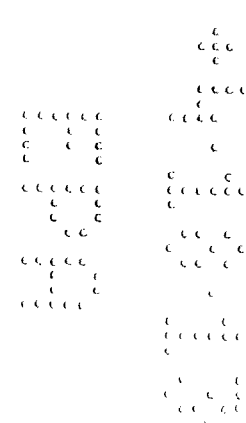

PETTIT



VIVID

ANTIFOULING PAINT

- Clean, bright colors including true white
- Hybrid technology provides hard slick finish
- Dual-biocides offer excellent multi-season protection
- Perfect for racing, trailering, or rack stored boats

NET CONTENTS
1 GALLON (128 FL. OZ.)
3.785 LITERS

1261 BLUE

KEEP OUT OF REACH OF CHILDREN
DANGER

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS


NOTIFICATION
 Date Reviewed: 5/16/13
 Reviewed By: [Signature]

5/6

50-634 gal 5/c

Cyan Mag Black

50-634 ga



General Description: Vivid offers the brightest colors, the blackest black and the whitest white available. Dual biocides provide excellent multi-season protection. Hybrid technology incorporates all the benefits of ablative and hard paints in one. Its hard, smooth surface withstands trailering and is easily burnished to a high performance racing finish. Vivid resists build up and can be hauled and re-launched without repainting. Safe for use on properly primed aluminum.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
Coverage, Application and Temperature: This product can be applied by brush, roller or spray. All painting should be done between 9:00 a.m. and 4:00 p.m. in order to avoid the possibility of dew or condensation spoiling the application. The temperature range of application should be between 50 and 90°F. At least two, and preferably three coats, should be applied for best performance, particularly in high wear areas such as the waterline. This product will cover approximately 440 square feet per gallon when applied at 2 dry mils film thickness.

When using a roller, use no greater than 3/16" nap
Preparation of Paint: It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Thinning: Use Pettit 120 Brushing Thinner for thinning this product if needed, particularly on warm or breezy days. Do not thin more than 10% (12 ounces per gallon) or inadequate paint film thickness will occur and premature erosion of the finish will be likely.

Note: Do not thin beyond your state's compliant limit.
Dry Times: The minimum recoat time is 4 hours. The minimum dry time between the final coat and launching is 16 hours. Under adverse drying conditions such as those encountered on cool or damp days extend the dry times by 50% in order to ensure that all the solvent is out of the paint film. There is no maximum dry time before launching.

SYSTEMS

Previously Painted Surfaces: If the previous coating is in good condition, thoroughly sand with 80-grit sandpaper, then solvent clean with Pettit 120 Brushing Thinner to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.

Bare Fiberglass: All bare fiberglass, regardless of age, should be thoroughly cleaned and de-waxed with 92 Bio-Blue Hull Surface Prep or de-waxed several times with Pettit D-95 De-waxer. Sand thoroughly with 80 grit sandpaper to a dull, frosty finish and rewash the sanded surface with 120 Brushing Thinner to remove sanding residue. Then apply two or three coats of this product, following application instructions. To eliminate the sanding operation, two methods are available:

1. Clean and de-wax the surface as described above, apply one very thin coat of 6998 Skip-Sand Primer using a 3/16" or less nap roller or brush, apply. Consult the primer label for complete application and antifouling top coating instructions. Then apply 2 to 3 coats of this product.

2. Clean, de-wax and etch the surface with 92 Bio-Blue Hull Surface Prep using a course Scotch-Brite pad in a swirling motion. Apply one coat of Pettit Protect Epoxy Primer. Consult the primer labels for complete application and antifouling top coating instructions. Then apply 2 to 3 coats of this product.

Bare Aluminum: Abrade the surface to clean, bright metal by sandblasting, sanding or wire-brushing. Blow off or vacuum sanding residue so that surface is clean and dry, then immediately apply one thin coat of Pettit 6455/044 Metal Primer or two coats of Pettit AlumProtect 4400/4401 Aluminum Epoxy Primer. Let dry two hours and apply two coats of Pettit Protect Epoxy Primer while following instructions. After the second coat of Pettit Protect has been applied, wait 5 to 8 hours, no more, no less, and apply the first coat of this product. Apply one or two additional coats of this product.

Underwater Metal Parts: Use Pettit 6456 Underwater Metal Kit for surface preparation instructions and priming underwater metal running gear.

All Other Substrates: Please go to www.pettitpaint.com for the product data sheet with application instructions for all other substrates.

Maintenance of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. This product is most effective when the boat is used periodically.

VOC: (as supplied) 330 grams/liter maximum.

Medical Emergencies: 1-800-548-0489

Product Information: 1-800-221-4466 or WWW.PETTITPAINT.COM

ACTIVE INGREDIENTS:

Cuprous Thiocyanate 25.00%
Zinc Omadine 2.50%

INERT INGREDIENTS: 72.50%

Total 100.00%

COPPER AS METALLIC 13.10%



This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2

EPA REGISTRATION NO. 60061-116

KOP-COAT, INC.
PETTIT PAINT BRAND
ROCKAWAY, NJ 07866

An **RPM** Company

ion

S.

8/6

/c

50-634 gal

04/08/13

General Description: Vivid offers the brightest colors, the blackest black and the whitest white available. Dual biocides provide excellent multi-season protection. Hybrid technology incorporates all the benefits of abrasive and hard paints in one. Its hard, smooth surface withstands trailering and is easily burnished to a high performance racing finish. Vivid resists build up and can be hauled and re-launched without repainting. Safe for use on properly primed aluminum.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
Coverage, Application and Temperature: This product can be applied by brush, roller or spray. All painting should be done between 9:00 a.m. and 4:00 p.m. in order to avoid the possibility of dew or condensation spoiling the application. The temperature range of application should be between 50 and 90°F. At least two, and preferably three coats, should be applied for best performance, particularly in high wear areas such as the waterline. This product will cover approximately 440 square feet per gallon when applied at 2 dry mils film thickness.

When using a roller, use no greater than 3/16" nap
Preparation of Paint: It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Thinning: Use Pettit 120 Brushing Thinner for thinning this product if needed, particularly on warm or breezy days. Do not thin more than 10% (12 ounces per gallon) or inadequate paint film thickness will occur and premature erosion of the finish will be likely.
Note: Do not thin beyond your state's compliant limit.

Dry Times: The minimum recoat time is 4 hours. The minimum dry time between the final coat and launching is 16 hours. Under adverse drying conditions such as those encountered on cool or damp days extend the dry times by 50% in order to ensure that all the solvent is out of the paint film. There is no maximum dry time before launching.

SYSTEMS

Previously Painted Surfaces: If the previous coating is in good condition, thoroughly sand with 80-grit sandpaper, then solvent clean with Pettit 120 Brushing Thinner to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.

Bare Fiberglass: All bare fiberglass, regardless of age, should be thoroughly cleaned and de-waxed with 92 Bio-Blue Hull Surface Prep or de-waxed several times with Pettit D-95 De-waxer. Sand thoroughly with 80 grit sandpaper to a dull, frosty finish and rewash the sanded surface with 120 Brushing Thinner to remove sanding residue. Then apply two or three coats of this product, following application instructions. To eliminate the sanding operation, two methods are available:

1. Clean and de-wax the surface as described above, apply one very thin coat of 6998 Skip-Sand Primer using a 3/16" or less nap roller or brush, apply. Consult the primer label for complete application and antifouling top coating instructions. Then apply 2 to 3 coats of this product.

2. Clean, de-wax and etch the surface with 92 Bio-Blue Hull Surface Prep using a course Scotch-Brite pad in a swirling motion. Apply one coat of Pettit Protect Epoxy Primer. Consult the primer labels for complete application and antifouling top coating instructions. Then apply 2 to 3 coats of this product.

Bare Aluminum: Abrade the surface to clean, bright metal by sandblasting, sanding or wire-brushing. Blow off or vacuum sanding residue so that surface is clean and dry, then immediately apply one thin coat of Pettit 6455/044 Metal Primer or two coats of Pettit AlumProtect 4400/4401 Aluminum Epoxy Primer. Let dry two hours and apply two coats of Pettit Protect Epoxy Primer while following instructions. After the second coat of Pettit Protect has been applied, wait 5 to 8 hours, no more, no less, and apply the first coat of this product. Apply one or two additional coats of this product.

Underwater Metal Parts: Use Pettit 6456 Underwater Metal Kit for surface preparation instructions and priming underwater metal running gear.

All Other Substrates: Please go to www.pettitpaint.com for the product data sheet with application instructions for all other substrates.

Maintenance of Antifouling Paint: No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface. Scrubbing is particularly important with boats that are idle for extended periods of time. This product is most effective when the boat is used periodically.

VOC: (as supplied) 330 grams/liter maximum.

Medical Emergencies: 1-800-548-0489

Product Information: 1-800-221-4466 or WWW.PETTITPAINT.COM

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

Danger: Corrosive. Causes skin burns and moderate eye irritation. Harmful if inhaled or swallowed. Do not get in eyes, on skin, or on clothing. Avoid breathing spray mist, vapors or sanding dust. While spraying and/or sanding boat surfaces, wear a NIOSH/MSHA certified mask or respirator. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Remove contaminated clothing and wash clothing before reuse. May pose an aspiration pneumonia hazard.

For applications by residential (non-commercial) users: Do not apply by airless spray; Do not apply more than one coat of this product within 24 hours; Apply only in outdoor, non-enclosed spaces. Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses, or face shield), long-sleeved shirt and long pants, socks and shoes. In addition to these minimal Personal Protective Equipment (PPE), commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 prefilter. Residential (non-commercial) users are advised to wear the same respirators, cartridges and pre-filters as required by commercial users.

Environmental Hazards: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

Physical or Chemical Hazards: Combustible. Do not use or store near heat or open flame. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO2 or dry chemical. Wear NIOSH/MSHA certified breathing equipment.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.
STORAGE: Store in a closed, properly labeled container in a cool place. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations.
PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.
CONTAINER HANDLING: Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

NOTICE! THIS PRODUCT CONTAINS A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.

FIRST AID

IF IN EYES:	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	<ul style="list-style-type: none"> • Call a poison control center or doctor immediately for treatment advice. • Do not give any liquid to the person. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
IF INHALED:	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. • Call a poison control center or doctor for further treatment advice.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15 - 20 minutes. • Call a poison control center or doctor for treatment advice.

HOT LINE NUMBER

Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.

NOTE TO PHYSICIAN

Probable mucosal damage may contraindicate the use of gastric lavage. This product contains petroleum distillates. Vomiting may cause aspiration pneumonia.

MADE IN U.S.A.  P3352 1261 GA.-04/11