



**UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, DC 20460**

**OFFICE OF CHEMICAL SAFETY  
AND POLLUTION PREVENTION**

April 27, 2021

Sandy Lea  
Pesticide Registrar  
Kop-Coat, Inc.  
36 Pine Street  
Rockaway, NJ 07866

Subject: Label Amendment – Addition of disclaimer and optional directions for use  
Product Name: Pettit Marine Paint Alumaspray + Aerosol Antifouling Paint  
EPA Registration Number: 60061-120  
Application Date: March 13, 2020  
Action Case Code/Decision Number: 00219623

Dear Mr. Lea:

The amended label referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act, as amended, is acceptable. This approval does not affect any conditions that were previously imposed on this registration. You continue to be subject to existing conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one copy of the final printed labeling before you release the product for shipment with the new labeling. In accordance with 40 CFR 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR 152.3.

Should you wish to add/retain a reference to the company's website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA's Office of Enforcement and Compliance.

Your release for shipment of the product constitutes acceptance of these conditions. If these conditions are not complied with, the registration will be subject to cancellation in accordance

Page 2 of 2  
EPA Reg. No. 60061-120  
Decision No. 00219623

with FIFRA section 6. If you have any questions, please contact Tara Flint via email at [flint.tara@epa.gov](mailto:flint.tara@epa.gov).

Sincerely,

A handwritten signature in cursive script, appearing to read "Aline Heffernan".

Aline Heffernan  
Acting Product Manager Team 31  
Regulatory Management Branch I  
Antimicrobials Division (7510P)  
Office of Pesticide Programs


Enclosure: Stamped Label

# PETTIT MARINE PAINT ALUMASPRAY + AEROSOL ANTIFOULING PANT

For Aluminum Outdrives and outboards

1863 Black

- Advanced Slime Resistance
- Excellent for All Underwater Metal Surfaces

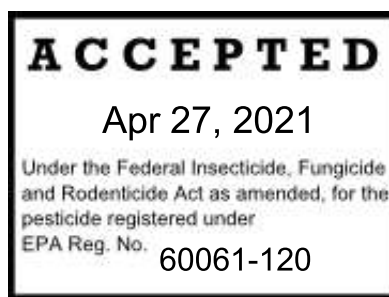

**DANGER! EXTREMELY FLAMMABLE**

**CONTENTS UNDER PRESSURE**

**KEEP OUT OF REACH OF CHILDREN**

## ACTIVE INGREDIENT:

Zinc Omadine® 1.43%

OTHER INGREDIENTS 98.57%

Total 100.0%

Contains Petroleum Distillates

EPA EST. NO: 81405-WI-001

EPA Reg. No.: 60061-120

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER:** Corrosive. Causes skin burns and moderate eye irritation. Do not get in eyes, on skin, or on clothing. Avoid breathing spray mist, vapors or sanding dust While spraying and/or sanding boat surfaces. Wear a minimum of a NIOSH-approved elastomeric half mask respirator with organic vapor (OV) cartridges and a combination N, R or P filter; OR a NIOSH-approved gas mask with OV canisters; OR a NIOSH-approved powered air purifying respirator with OV cartridges and combination HE filters. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Wear coveralls worn over long-sleeved shirt and long pants, chemical resistant gloves, protective eyewear (goggles, face shield or safety glasses), socks, and chemical resistant footwear. Remove contaminated clothing and wash clothing before reuse

<b>FIRST AID</b>	
<b>IF IN EYES</b>	<ul style="list-style-type: none"> <li>* Hold eye open and rinse slowly and gently with water for 15-20 minutes</li> <li>* Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li> <li>* Call a poison control center or doctor for treatment advice.</li> </ul>
<b>IF SWALLOWED:</b>	<ul style="list-style-type: none"> <li>* Call a poison control center or doctor immediately for treatment advice.</li> <li>* Do not give any liquid to the person.</li> <li>* Do not induce vomiting unless told to do so by a poison control center or doctor.</li> <li>* Do not give anything by mouth to an unconscious person.</li> </ul>
<b>IF INHALED:</b>	<ul style="list-style-type: none"> <li>* Move person to fresh air.</li> <li>* If person is not breathing, call 911 or an ambulance. Then give artificial respiration, preferably mouth-to-mouth, if possible.</li> <li>* Call a poison control center or doctor for further treatment advice.</li> </ul>
<b>IF ON SKIN OR CLOTHING</b>	<ul style="list-style-type: none"> <li>* Take off contaminated clothing.</li> <li>* Rinse skin immediately with plenty of water for 15-20 minutes.</li> <li>* Call a poison control center or doctor for treatment advice.</li> </ul>
<b>HOT LINE NUMBER</b>	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
<b>NOTE TO PHYSICIAN</b>	
Probable mucosal damage may contraindicate the use of gastric lavage. This product contains petroleum distillates. Vomiting may cause aspiration pneumonia.	

**Kop-Coat, Inc.**  
**36 Pine Street**  
**Rockaway, NJ 07866**

NET WEIGHT 12 OZ. (340g)

## **DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**NEW OUTDRIVE UNIT:** Lightly sand the factory paint with 80-grit sandpaper to dull the surface, clean with Pettit 120/T-10 Brushing Thinner and apply two coats of Alumaspray + Aerosol Antifouling Paint allowing a minimum of 6 hours at 70°F or 12 hours at 50°F drying time between coats.

**OUTDRIVES PREVIOUSLY PAINTED WITH ANTIFOULING PAINT:** Lightly sand the old antifouling paint, and then clean the sanded surface with Pettit 120/T-10 Brushing Thinner. Apply one coat of Pettit 6627 Tie-Coat Primer and allow to dry at least 4 hours, then apply two coats of Alumaspray + Aerosol Antifouling Paint allowing a minimum of 6 hours drying time between coats. If the old paint has been chipped to bare metal, the entire surface must be primed. Smaller areas less than one square inch can be spot primed prior to applying Alumaspray + Aerosol Antifouling Paint.

**BARE ALUMINUM OUTDRIVES AND OUTBOARDS:** The metal surface should be properly sandblasted or cleaned to a bright metal. Apply two coats of Pettit Aluma Protect Aluminum Epoxy

Primer 4400/4401 followed by two coats of Pettit Protect High Build Epoxy Primer 4700/4701 and two coats of Alumaspray + Aerosol Antifouling Paint.

**DRY TIMES:** This paint will dry to the touch in 30 minutes. The minimum recoat time is 6 hours. The minimum dry time between the final coat and launching is 16 hours. Under adverse drying conditions such as those encountered on cool or damp days extend the dry times by 50% in order to ensure that all the solvent is out of the paint film. There is no maximum time before launching.

**APPLICATION:** Shake can vigorously at least one minute after the mixing ball begins to rattle. Shake can often during use. Hold can 10-12 inches from the surface. Depress nozzle and spray with smooth even strokes. When finished spraying, clear spray valve by turning can upside down and spraying until no more paint comes out.

**COVERAGE:** One can covers approximately 15 square feet. Use entire contents of one can for each lower unit or outboard.

**CLEAN-UP:** Use Pettit 120/T-10 Brushing Thinner.

[PREVIOUSLY PAINTED SURFACES: If the previous coating is in good condition, thoroughly sand with 80-grit sandpaper, then solvent clean with [Pettit 120 Brushing Thinner] [thinner] to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.]

[BARE FIBERGLASS: All bare fiberglass, regardless of age, should be thoroughly cleaned several times with [92 Bio-Blue Pre-Paint Cleaner] [dewaxer] following the instruction of the [dewaxer] [Bio-Blue] can. Sand thoroughly with 80-grit sandpaper to a dull, frosty finish and rewash the sanded surface with fresh water to remove sanding residue. Then apply two coats of this product following application instructions. Careful observation of the above instructions will help ensure long-term adhesion of this and subsequent years' antifouling paint. To eliminate the sanding operation, scrub the surface using [92 Bio-Blue Pre-Paint Cleaner] [cleaner] and a coarse Scotch-Brite® pad. Clean-up all residue with fresh water and allow the hull to dry thoroughly. Then apply one coat of [Pettit Protect 4700/4701] [primer]. Read and follow carefully the application and topcoating instructions on the [Skip Sand Primer] [primer] label. Apply two coats of this antifouling paint.]

[BARE ALUMINUM: [See Product Data Sheet for application instructions.] Sandblast to clean, bright metal and remove blasting residue with clean, dry compressed air or a clean brush. Immediately apply three coats of [Pettit 4400/4401 Aluma Protect Epoxy Primer] [primer] followed by two finish coats of this product. Read and follow carefully the instructions on the Pettit 4400/4401 Aluma Protect Epoxy Primer label.]

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish and aquatic invertebrates. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge.

Do not discharge effluent into sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARDS: EXTREMELY FLAMMABLE!** Contents under pressure. Keep away from heat, sparks or open flame. Do not puncture or incinerate container. Exposure to temperatures above 130° F may cause bursting. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO2 or dry chemical. Wear NIOSH certified breathing equipment.

## **STORAGE AND DISPOSAL**

**PESTICIDE STORAGE:** Keep away from heat, sparks and open flame. Store in a closed, properly labeled container in a cool, dry place. Keep container tightly closed and upright to prevent leakage. In case of spillage, absorb and dispose of in accordance with local and state authorities.

**PESTICIDE DISPOSAL:** Do Not Puncture or Incinerate! If empty: Place in trash or offer for recycling, if available. If partly filled: Call your local solid waste agency for disposal centers. At present, there are only a few such centers in the country. Before offering for recycling, empty the can by using the product according to the label.(DO NOT PUNCTURE!). If recycling option is not available, discard in the trash. If partly filled: Call your local solid waste agency for disposal center.

**CONTAINER DISPOSAL:** Do not puncture or incinerate. This container may be recycled in aerosol recycling centers. At present, there are only a few such centers in the country.

**MAXIMUM VOC: 75%**

**NOTICE! THIS PRODUCT CONTAINS A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER, BIRTH DEFECTS, OR OTHER REPRODUCTIVE HARM.**

**GENERAL DESCRIPTION:** Pettit Marine Paint Alumaspray+ Aerosol Antifouling Paint is an antifouling protective coating resistant to slime, algae, barnacles and other marine and freshwater fouling organisms. This product's unique controlled erosion polymers combined with the latest organic biocide technology minimizes coating build-up and keeps underwater surfaces smooth and clean. This product is for use in fresh, salt or brackish water on underwater metal parts such as outdrive units and outboard motors below the waterline. This paint is intended for use on underwater metal surfaces of recreational and commercial vessels of any size.

**MEDICAL EMERGENCIES: 1-800-548-0489**

**PRODUCT INFORMATION: 1-800-221-4466**

MANUFACTURED IN USA

[Product Information Number 1-800-497-0010] [Emergency Contact Information 1-800-535-5053]

[DISCLAIMER: The performance of any *[product type]* depends on many factors outside the control of TotalBoat including without limitation, surface preparation, proper application, and environmental conditions. Therefore, TotalBoat cannot guarantee this product suitable for your particular purpose or application. Implied warranties of fitness for a particular purpose and of merchantability are excluded,

except as otherwise provided for in the contract with buyer; there are no warranties that extend beyond the description on the face hereof. TotalBoat shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at TotalBoat's option.]