



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510C)
1200 Pennsylvania Avenue NW
Washington, D.C. 20460

NOTICE OF PESTICIDE:

- x Registration
Reregistration

(under FIFRA, as amended)

EPA Reg. Number: 60061-125

Date of Issuance: FEB 18 2009

Term of Issuance: Expires 3/17/2010

Name of Pesticide Product: Pettit Marine Paint Ultima SPC Antifouling Paint

Name and Address of Registrant (include ZIP Code):

Kop-Coat, Inc.
3020 William Pitt Way
Pittsburgh, PA 15238-3388

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(A) provided that you:

- 1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.
2. Make the labeling changes listed below before you release the product for shipment:
a. Add the phrase "EPA Registration Number 60061-125"

Signature of Approving Official:

Handwritten signature of Marshall Swindell

Marshall Swindell
Product Manager-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Date:

FEB 18 2009

3. Revise the ingredient statement to show a declaration of the percentage of metallic copper. This statement must be placed below the ingredient statement.
4. Under the "Physical or Chemical Hazards" section, replace the word, "flammable" with "combustible".
5. Submit the following "required" studies within 18 months of the date stamped of this notice of Conditional Registration:

Studies on the Zinc Omadine Technical Grade Active

Ecological Effects:

GLN 72-4 Fish Early Life Stage (Estuarine Fish Study)
GLN 73-1 Whole Sediment Acute, Freshwater Invertebrates
GLN 73-2 Whole Sediment Acute, Marine Invertebrates
GLN 123-2 Aquatic Plant Growth (4 species: Navcula, Anabaena,
Lemma, Scenedemus
GLN 163-1 Soil Column
GLN 162-3 Anaerobic Aquatic Metabolism

Toxicology Effects

GLN 81-7 Acute Neurotoxicity-Hen
GLN 82-5 Subchronic 90 Day Neurotoxicity

Exposure Effects

GLN 875.1100 Dermal Exposure (Outdoor)
GLN 875.1600 Inhalation Exposure (Outdoor)
GLN 875.1300 Dermal Exposure (Indoor)
GLN 875.1400 Inhalation Exposure (Indoor)

6. Submit the following studies within two and a half years of the date stamped on this Notice Conditional Registration.

GLN 83-4 Two Generation Reproduction for Residential Uses)

7. Submit three following "reserved" studies within 18 months of the date of the Agency's written request for these data. The need for these reserved data will be based upon the results of one or more of the above studies as determined by the Agency.

8. Submit the following "reserved" studies within 18 months of the date of the Agency's written request for these data. The need for these reserved data will be based upon the results of one or more of the above studied as determined by the Agency.

- GLN 72-5 Fish Life Cycle
- GLN 72-6 Aquatic organism bioavailability/biomagnifications/toxicity tests
- GLN 72-7 Simulated or actual field testing for aquatic organisms
- GLN 71-4 Avian Reproductions
- GLN 73-3 Acute Pore Water Studies (fish and invertebrates)
- GLN 74-1 Whole Sediment Chronic Study (invertebrates)
- GLN 123-1 Seeding Emergence-Dose Response Test
Special Study: Monitoring of Representative U.S. Water
- GLN 162-2 Anaerobic Soil Metabolism
- GLN 164-2 Aquatic Field Study
- GLN 165-4 Bioaccumulation (fish)
- GLN 165-5 Accumulation Study (Nontarget Organism)
- GLN (Not Assigned) Monitoring of Representative U.S. Water


9. The Confidential Statement of Formula dated October 7th, 2008, is acceptable.

10. Submit three (3) copies of the final printed label prior to releasing this product for sale.

This conditional registration will expire automatically on 3/17/2010. If you fail to satisfy the conditions imposed in the registration, EPA may issue a Notice of Registration to Cancel under section 6(e) of FIFRA. Your release for shipment of the product constitutes acceptance of these conditions.


A stamped copy of the label is enclosed for your records.

Sincerely,

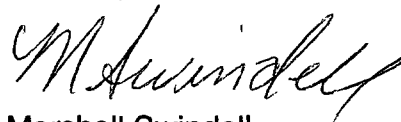

Marshall Swindell
Product Manager 33
Regulatory Branch I
Antimicrobials Division (7510P)

Enclosure: (Stamped Labeling)

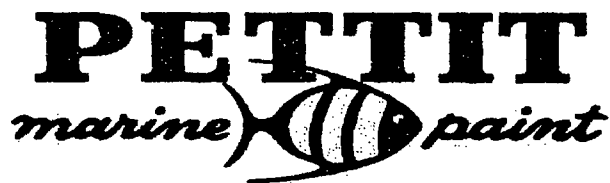

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Pettit Paint Company cannot guarantee this product's suitability for your particular purpose or application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

NET CONTENTS
1 GAL. (128 FL. OZ.)
3.785 LITERS

ULTIMA SPC

ANTIFOULING PAINT

- Self-Polishing Copolymer Reduces Coating Build-Up
- Dual Biocide to Control Hard and Soft Fouling
- Advanced Slime Resistance
- Multi-Season Technology

KEEP OUT OF REACH OF CHILDREN
DANGER
SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

ACCEPTED
with COMMENTS
in EPA Letter Dated:
FEB 18 2009

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the purposes,
registered under EPA Reg. No.

60061-125

ACTIVE INGREDIENT:

Cuprous Oxide 40.43%
Zinc Omadine® 3.00%

INERT INGREDIENTS: 56.57%
Total 100.00%

This product contains petroleum distillates.

EPA EST. NO. 60061-NJ-2
EPA REGISTRATION NO. 60061-

KOP-COAT, INC.
PETTIT PAINT BRAND
ROCKAWAY, NJ 07866

An RPM Company

4/5

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER: Corrosive. Causes skin burns and moderate eye irritation. Do not get in eyes, on skin, or on clothing. Avoid breathing spray mist, vapors or sanding dust. While spraying and/or sanding boat surfaces, wear a NIOSH/MSHA certified mask or respirator. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Wear coveralls worn over long-sleeved shirt and long pants, chemical resistant gloves, protective eyewear (goggles, face shield or safety glasses), socks, and chemical resistant footwear. Remove contaminated clothing and wash clothing before reuse. May pose an aspiration pneumonia hazard.

For applications by residential (non-commercial) users: Do not apply by airless spray; Do not apply more than one coat of this product within 24 hours; Apply only in outdoor, non-enclosed spaces.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long-sleeved shirt and long pants, socks and shoes. In addition to these minimum Personal Protective Equipment (PPE), commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifoulant paint, commercial users must wear a respirator with an **organic vapor removing cartridge with a pre-filter approved for pesticides (MSHA/NIOSH APPROVAL NUMBER TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 pre-filter. Residential (non-commercial) users are advised to wear the same respirators, cartridges and pre-filters as required by commercial users.**

FIRST AID	
IF IN EYES:	<ul style="list-style-type: none"> Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	<ul style="list-style-type: none"> Call a poison control center or doctor immediately for treatment advice. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.
IF INHALED:	<ul style="list-style-type: none"> Move person to fresh air. If person is not breathing, call 911 or an ambulance then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water of 15-20 minutes. Call a poison control center or doctor for treatment advice.
HOT LINE NUMBER	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
NOTE TO PHYSICIAN	
Probable mucosal damage may contraindicate the use of gastric lavage. This product contains petroleum distillates. Vomiting may cause aspiration pneumonia.	

ENVIRONMENTAL HAZARDS: This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS: FLAMMABLE! Keep away from heat, sparks or open flame. Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO₂ or dry chemical. Wear NIOSH/MSHA certified breathing equipment.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Keep away from heat and open flame. Store in a closed, properly labeled container in a cool, dry place. Keep container closed and upright to prevent leakage. In case of spillage, absorb and dispose of in accordance with local and state authorities.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the user, they should be placed in a clearly labeled container and sent to a licensed hazardous waste disposal site. For more information, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

VOC: (as supplied) 490 grams/liter maximum.

NOTICE! THIS PRODUCT CONTAINS A CHEMICAL KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.

GENERAL DESCRIPTION: Pettit Marine Paint Ultima SPC Antifouling Paint is an antifouling protective coating resistant to slime, algae, barnacles and other marine and freshwater fouling organisms. This product's unique controlled erosion, hydrolyzing copolymer combined with the latest organic biocide technology minimizes coating build-up and keeps underwater surfaces smooth and clean. This product is for use in fresh, salt or brackish water on hulls and underwater parts below the waterline. This paint is intended for use on recreational and commercial vessels of any size.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

PREPARATION OF SURFACE: The surface to be painted should be clean, dry and free of any contamination or foreign matter. Always prepare the surface to be painted by sanding and solvent cleaning before any paints or primers are applied. When sanding old antifouling paint use a dust mask to prevent the inhalation of sanding dust. Old, soft bottom paints must be completely removed before applying.

COVERAGE, APPLICATION AND TEMPERATURE: This product can be applied by brush or short nap roller. All painting should be done between 9:00 a.m. and 4:00 p.m. in order to avoid the possibility of dew or condensation spoiling the application. The temperature range of application should be between 50 and 90°F. At least two, and preferably three coats, should be applied for best performance, particularly in high wear areas such as the waterline. This product will cover approximately 360 square feet per gallon when applied at 2 dry mils film thickness.

PREPARATION OF PAINT: This product may exhibit pigment settling, especially if the paint has been on the shelf for several months. It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

THINNING: Use Pettit 120 Brushing Thinner for thinning this product if needed, particularly on warm or breezy days. Do not thin more than 10% (12 ounces per gallon) or inadequate paint film thickness will occur and premature erosion of the finish will be likely.

DRY TIMES:	To recoat	To launch
90°F	3 hours	8 hours
70°F	6 hours	16 hours
50°F	12 hours	24 hours

The above dry times are minimums. This product may be recoated and launched after the minimum times shown. There is no maximum time before launching.

SYSTEMS

Mix paint thoroughly to ensure toxicants are evenly dispersed throughout the can. All surfaces must be clean, dry and properly prepared prior to painting.

PREVIOUSLY PAINTED SURFACES: If the previous coating is in good condition, thoroughly sand with 80-grit sandpaper, then solvent clean with Pettit 120 Brushing Thinner to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.

BARE FIBERGLASS: All bare fiberglass, regardless of age, should be thoroughly cleaned several times with Pettit D95 Fiberglass Dewaxer. Sand thoroughly with 80-grit sandpaper to a dull, frosty finish and rewash the sanded surface with D95 Fiberglass Dewaxer to remove sanding residue. Then apply two coats of this product following application instructions. Careful observation of the above instructions will help ensure long-term adhesion of this and subsequent years' antifouling paint. To eliminate the sanding operation, wash the fiberglass three times using Pettit D95 Dewaxer. Then apply one coat of Pettit 6998 Skip Sand Primer. Read and follow carefully the application and topcoating instructions on the Skip Sand Primer label. Apply at least two coats of this antifouling paint.

BARE STEEL: Sandblast to clean, bright metal and remove blasting residue with clean, dry compressed air or clean brush. Immediately apply three coats of Pettit 4700/4701 Pettit Protect Epoxy Primer followed by two finish coats of this product. Read and follow carefully the instructions on the 4700/4701 Pettit Protect Epoxy Primer label. If the surface to be painted will be prepared using hand tools such as wire wheels or sanders, clean off residue and immediately apply one coat of Pettit 6980 Rustlok Steel Primer. Let dry 1-2 hours and follow with two coats of Pettit 4700/4701 Pettit Protect Epoxy Primer. Then apply two finish coats of this product. Read and follow carefully the instructions for application and topcoating on both primer labels.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

MEDICAL EMERGENCIES: 1-800-548-0489
PRODUCT INFORMATION: 1-800-271-4466

MADE IN USA P32-- 1299/GA 02/07

ACCEPTED
with COMMENTS
in EPA Letter Decision
FEB 18 2009
EPA REGION 9
San Francisco, CA
1.0101-125

5/5