
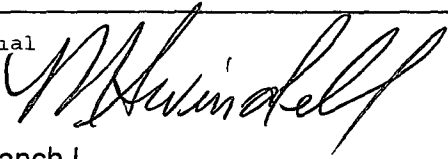


60061-136

9/12/2012

1/6

 <p align="center">U S ENVIRONMENTAL PROTECTION AGENCY Office of Pesticide Programs Antimicrobials Division (7510C) 1200 Pennsylvania Avenue NW Washington D C 20460</p> <p align="center">NOTICE OF PESTICIDE <u> x </u> Registration <u> </u> Reregistration (under FIFRA as amended)</p>	EPA Reg Number 60061-136	Date of Issuance SEP 12 2012
	Term of Issuance Conditional	
	Name of Pesticide Product Hydrocoat SR Dual-Biocideablative Antifouling	
Name and Address of Registrant (include ZIP Code) <p align="center">Kimberly Treloar Kop-Coast Inc 1850 Koppers Building Pittsburg, PA 15219</p>		
<p>Note Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce In any correspondence on this product always refer to the above EPA registration number</p>		
<p>On the basis of information furnished by the registrant the above named pesticide is hereby registered under the Federal Insecticide Fungicide and Rodenticide Act</p> <p>Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency In order to protect health and the environment the Administrator on his motion may at any time suspend or cancel the registration of a pesticide in accordance with the Act The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others</p> <p align="center">This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(A) provided that you</p> <p align="center">1 Submit and/or cite all data required for registration of your product under FIFRA sec 3(c)(5) when the Agency requires all registrants of similar products to submit such data and submit acceptable responses required for re-registration of your product under FIFRA section 4</p>		
Signature of Approving Official Marshall Swindell Product Manager Team-33 Regulatory Management Branch I Antimicrobials Division (7510P) 	Date SEP 12 2012	

2 Make the labeling changes listed below before you release the product for shipment

a Revise the 'EPA Registration Number to read 'EPA Reg No 60061-136

3 To satisfy OPPTS 830 6317 (Storage Stability) and OPPTA 830 6230 (Corrosion Characteristics) requirements results for a minimum of 1 year from a GLP-compliant storage stability and corrosion characteristics study must be provided


If these conditions are not complied with the registration will be subject to cancellation in accordance with FIFRA sec 6(e) Your release for shipment of the product constitutes acceptance of these conditions

Submit two (2) copies of the revised labeling bearing the labeling revisions listed above A stamped copy of the label is enclosed for your records

A stamped copy of the 'accepted' label is enclosed for your records

If you have questions concerning this matter please contact Marshall Swindell at (703) 308-6341 or by email at swindell_marshall@epa.gov

Sincerely



Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Enclosure (Stamped Label)



ACCEPTED
with COMMENTS
in EPA Letter Dated

SEP 12 2012

Under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), this product is registered under EPA registration number 60061-136.

DISCLAIMER The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company including surface preparation, proper application and environmental conditions. Therefore Pettit Paint Company cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy if any is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

HYDROCOAT SR

DUAL-BIODEGRADABLE ANTI-FOULING

- Dual Biocides Provide Multi-Season Protection
- Uses Copper Composite Technology
- Easy Cleanup with Soap & Water
- Dual Biocides Control Hard and Soft Growth
- Reduces Paint Buildup Through Controlled Erosion
- Water-Based Formula
- Ablative Technology Eliminates Sanding & Paint Build-Up

NET CONTENTS
1 GAL (128 FL OZ)
3.785 LITERS

KEEP OUT OF REACH OF CHILDREN
WARNING

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN. MAY BE FATAL IF SWALLOWED OR INHALED.
SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENT	
Cuprous Oxide	25.25%
N-Cyclopropyl N (1,1-dimethyl-ethyl)-6-(methylthio)-1,3,5-triazine-2,4-diamine	2.00%
INERT INGREDIENTS	72.75%
TOTAL	100.00%
COPPER AS METALLIC	22.4%

This product contains petroleum distillates.

EPA EST NO 60061-NJ 2
EPA REGISTRATION NO 60061

KOP COAT, INC
PETTIT PAINT BRAND
ROCKAWAY, NJ 07866

An RPM Company

General Description This product is an ablative antifouling coating designed to polish away at a controlled rate, constantly exposing a fresh surface for aggressive multi-season antifouling protection. The high loading of cuprous oxide in the formula with the addition of a second biocide enables the paint to perform well in even the most severe fouling areas. The controlled erosion minimizes coating buildup and keeps underwater surfaces smooth and clean. This product is effective against algae, barnacles, and other marine and freshwater fouling organisms.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Coverage, Application and Temperature This product can be applied by brush, roller or spray. All painting should be done between 9:00 a.m. and 4:00 p.m. in order to avoid the possibility of dew or condensation spoiling the application. The temperature range of application should be between 50 and 90°F. At least two coats should be applied for best performance, particularly in high wear areas such as the waterline. This product will cover approximately 450 square feet per gallon when applied at 2 dry mils film thickness.

Preparation of Paint It is necessary to thoroughly mix the paint before using. If possible, shake the can of paint on a mechanical paint shaker. Before using, check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

Thinning Thinning this product is not normally required. If thinning is necessary, use clean water only. Do not thin more than 10% (12 ounces per gallon) or inadequate paint film thickness will occur and premature erosion of the finish will be likely. Use clean water for cleaning up equipment.

Dry Times The minimum recoat time is 3 hours. The minimum dry time between the final coat and launching is 16 hours. Under adverse drying conditions such as those encountered on cool or damp days, extend the dry times by 50% in order to ensure that all the solvent is out of the paint film. There is no maximum dry time before launching.

SYSTEMS

Previously Painted Surfaces If the previous coating is in good condition, thoroughly sand with 80-grit sandpaper, then solvent clean with Pettit 120/T-10 Brushing Thinner to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.

Bare Fiberglass All bare fiberglass, regardless of age, should be thoroughly cleaned and de-waxed with 92 Bio-Blue Hull Surface Prep or de-waxed several times with Pettit D-95 De-waxer. Sand thoroughly with 80 grit sandpaper to a dull, frosty finish and rewash the sanded surface with 120 Brushing Thinner to remove sanding residue. Then apply two coats of this product, following application instructions.

To eliminate the sanding operation, two methods are available:

1. Clean and de-wax the surface as described above, apply one very thin coat of 6998 Skip-Sand Primer using a 3/16" or less nap roller or brush, apply. Consult the primer label for complete application and antifouling top coating instructions. Then apply 2 coats of this product.
2. Clean, de-wax and etch the surface with 92 Bio-Blue Hull Surface Prep using a coarse Scotch-Brite pad in a swirling motion. Apply one coat of Pettit Protect Epoxy Primer. Consult the primer labels for complete application and antifouling top coating instructions. Then apply 2 coats of this product.

Underwater Running Gear Use Pettit 6456 Underwater Metal Kit following all instructions before applying this product.

All Other Substrates Please go to www.pettitpaint.com and consult the product data sheet.

DO NOT USE THIS PRODUCT ON ALUMINUM HULLS OR OUTDRIVES

Maintenance of Antifouling Paint No antifouling paint can be effective under all conditions of exposure. Man-made pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the bottom of the boat be checked regularly to make sure it is clean and that no growth is occurring. Lightly wipe the bottom with a soft cloth or sponge to remove anything from the antifouling paint surface. Wiping is particularly important with boats that are idle for extended periods of time. The self-cleaning nature of the product is most effective when the boat is used periodically.

VOC (as supplied) 150 grams/liter maximum

ACCEPTED
with COMMENTS
in EPA Letter Dated
11-22-05
10015 2 3 3 14 No 60061

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING Causes eye irritation Harmful if absorbed through skin Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals Avoid contact with skin, eyes or clothing Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat May be fatal if swallowed or inhaled Do not breathe vapors, spray mist or sanding dust While spraying and/or sanding boat surfaces, wear a NIOSH/MSHA certified mask or respirator Remove contaminated clothing and wash clothing before reuse Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco or using the toilet May pose an aspiration pneumonia hazard

ENVIRONMENTAL HAZARDS

This material is toxic to fish Do not apply directly to water by cleaning of equipment or disposal of wastes Do not allow chips and dust generated during paint removal to enter water Dispose of paint debris in an approved landfill Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge Do not discharge effluent containing this product to sewer system without previously notifying the local sewage treatment plant authority For guidance contact your State Water Board or Regional Office of the EPA

PHYSICAL OR CHEMICAL HAZARDS Use only with adequate ventilation during mixing, application and drying Use absorbent clean-up material if spilled For fires, blanket flames with foam, CO2 or dry chemical

STORAGE & DISPOSAL

Do not contaminate water, food or feed by storage or disposal Open dumping is prohibited

Pesticide Storage Store in a closed, properly labeled container in a cool place If static generating conditions exist, provide necessary grounding and bonding Keep containers closed when not in use

Pesticide Disposal Pesticide wastes are toxic Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance

Nonrefillable container Do not reuse or refill this container Offer for recycling, if available Clean container promptly after emptying

Container Disposal Triple rinse as follows Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip Fill the container 1/4 full with water and recap Shake for 10 seconds Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal Drain for 10 seconds after the flow begins to drip Repeat this procedure two more times

FIRST AID

IF IN EYES

- Hold eye open and rinse slowly and gently with water for 15-20 minutes
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye
- Call a poison control center or doctor for treatment advice

IF SWALLOWED

- Call a poison control center or doctor immediately for treatment advice
- Have person sip a glass of water if able to swallow
- Do not induce vomiting unless told to do so by a poison control center or doctor
- Do not give anything by mouth to an unconscious person

IF INHALED

- Move person to fresh air
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible
- Call a poison control center or doctor for further treatment advice

IF ON SKIN OR CLOTHING

- Take off contaminated clothing
- Rinse immediately with plenty of water for 15-20 minutes
- Call a poison control center or doctor for treatment advice

ACCEPTED
with COMMENTS
EPA Label Dated
FEB 12 2012
Under the Federal Insecticide
Fungicide and Rodenticide Act as
amended for the pesticide
registered under EPA Reg No 60061

Hot Line Number

Have the product container or label with you when calling a poison control center or doctor, or going for treatment
You may also contact 1-800-548-0489 for emergency medical treatment information

Note to Physician

Probable mucosal damage may contraindicate the use of gastric lavage This product contains petroleum distillates
Vomiting may cause aspiration pneumonia

Medical Emergencies 1-800-548-0489

Product Information 1-800-221-4466 or WWW.PEITITPAINT.COM

MADE IN USA GA 04/11

6/6
ACCEPTED
with COMMENTS
in EPA Letter Dated

F 12 2012
Under the Federal Insecticide
Fungicide and Rodenticide Act as
amended for the pesticide
registered under EPA Reg No 60061-136