

60061-137

8/27/2012

1/5



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs  
Antimicrobials Division (7510C)  
1200 Pennsylvania Avenue NW  
Washington, D.C. 20460

EPA Reg. Num  
60061-137

Date of Issuance:  
AUG 27 2012

Term of Issuance:

Name of Pesticide Product: Hydrocoat  
Eco Ablative Antifouling Paint

NOTICE OF PESTICIDE:

- Registration
- Reregistration

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):

Kop-Coat, Inc.  
3020 William Pitt Way  
Pittsburgh, PA 15238

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.

2. Make the labeling changes listed below before you release the product for shipment:

a. Add the phrase "EPA Registration Number 60061-137."

Signature of Approving Official:

Marshall Swindell  
Product Manager-33  
Regulatory Management Branch I  
Antimicrobials Division (7510P)

Date:

AUG 27 2012


The Confidential Statement Formula dated July 31<sup>st</sup>, 2012, is acceptable.

3. Submit three (3) copies of the final printed label prior to releasing this product for sale.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.


Sincerely,

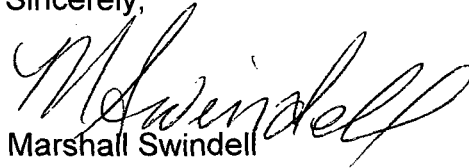

Marshall Swindell  
Product Manager 33  
Regulatory Branch I  
Antimicrobials Division (7510P)

Enclosure: (Stamped Labeling)

# PETTIT

marine  paint

**DISCLAIMER:** The performance of any marine paint or coating depends on many factors outside the control of Pettit Paint Company, including surface preparation, proper application and environmental conditions. Therefore, Pettit Paint Company cannot guarantee this product's suitability for your particular purpose of application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. Pettit Paint Company shall not under any circumstances be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at Pettit Paint's option.

ACCEPTED  
with COMMENTS  
in EPA Letter Dated:

**AUG 27 2012**

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act as  
amended, for the pesticide,  
registered under EPA Reg. No. 60061-137

## Hydrocoat ECO

### ABLATIVE ANTIFOULING PAINT

- Uses Ecomea, a copper free Biocide Technology
- Dual Biocide ablatives offers excellent multi-season protection.
- Reduces paint build-up through controlled erosion
- Use on all substrates including aluminum
- Apply over almost any bottom paint
- Clean, Bright Colors
- Extremely effective and environmentally friendly
- Excellent for all underwater metals
- Copper-free, multi-season ablatives
- Utilizes clean core technology
- Soap and water clean up

#### ACTIVE INGREDIENT:

Tralopyril	6.00%
Zinc Pyrithione	4.80%
INERT INGREDIENTS:	89.20%
TOTAL	100.00%

This product contains petroleum distillates.

NET CONTENTS  
1 GAL. (128 FL. OZ.)  
3.785 LITERS

KEEP OUT OF REACH OF CHILDREN

### WARNING

COMBUSTIBLE LIQUID AND VAPOR. VAPOR HARMFUL.  
HARMFUL OR FATAL IF SWALLOWED.

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

EPA EST. NO. 60061-NJ-2  
EPA REGISTRATION NO. 60061-137

KOP-COAT, INC.  
PETTIT PAINT BRAND  
ROCKAWAY, NJ 07866 An RPM Company

with COPIES of the...  
in EPA Letter Dated:

AUG 27 2012

1-137

**Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS**  
Causes substantial but temporary eye injury. Causes skin irritation. Do not get in eyes, on skin, or on clothing. Harmful if swallowed. Avoid breathing spray mist, vapors or sanding dust. While spraying and/or sanding boat surfaces, wear a NIOSH/MSHA certified mask or respirator. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Wear coveralls worn over long-sleeved shirt and long pants, chemical resistant gloves, protective eyewear (goggles, face shield or safety glasses), socks, and chemical resistant footwear. Remove contaminated clothing and wash clothing before reuse. May pose an aspiration/pneumonia hazard.

**For applications by residential (non-commercial) users: Do not apply by aerosol spray; Do not apply more than one coat of this product within 24 hours; Apply only in outdoor, non-enclosed spaces.** Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long-sleeved shirt and long pants, socks and shoes. In addition to these minimum Personal Protective Equipment (PPE), commercial users must wear a disposable coverall with hood and chemical resistant footwear.

While removing existing paint by sanding or blasting, or applying new antifouling paint, commercial users must wear a respirator with an organic vapor removing cartridge with a pre-filter approved for pesticides (MSHA/NIOSH APPROVAL NUMBER TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 pre-filter. Residential (non-commercial) users are advised to wear the same respirators, cartridges and pre-filters as required by commercial users.

<b>IF IN EYES:</b>	<ul style="list-style-type: none"> <li>Hold eye open and rinse slowly and gently with water for 15-20 minutes.</li> <li>Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.</li> <li>Call a poison control center or doctor for treatment advice.</li> </ul>
<b>IF SWALLOWED:</b>	<ul style="list-style-type: none"> <li>Call a poison control center or doctor immediately for treatment advice.</li> <li>Do not induce vomiting unless told to do so by a poison control center or doctor.</li> <li>Do not give any liquid to the person.</li> <li>Do not give anything by mouth to an unconscious person.</li> </ul>
<b>IF INHALED:</b>	<ul style="list-style-type: none"> <li>Move person to fresh air.</li> <li>If person is not breathing, call 911 or an ambulance then give artificial respiration, preferably mouth-to-mouth, if possible.</li> <li>Call a poison control center or doctor for further treatment advice.</li> </ul>
<b>IF ON SKIN OR CLOTHING:</b>	<ul style="list-style-type: none"> <li>Take off contaminated clothing.</li> <li>Rinse skin immediately with plenty of water for 15-20 minutes.</li> <li>Call a poison control center or doctor for treatment advice.</li> </ul>
<b>HOT LINE NUMBER</b>	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-548-0489 for emergency medical treatment information.	
<b>NOTE TO PHYSICIAN</b>	
Probable mucosal damage may contraindicate the use of gastric lavage. This product contains petroleum distillates. Vomiting may cause aspiration, pneumonia.	
<b>ENVIRONMENTAL HAZARDS:</b> This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.	
<b>PHYSICAL OR CHEMICAL HAZARDS:</b> Use only with adequate ventilation during mixing, application and drying. Use absorbent clean-up material if spilled. For fires, blanket flames with foam, CO <sub>2</sub> or dry chemical. Wear NIOSH/MSHA certified breathing equipment.	

**STORAGE AND DISPOSAL**  
Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. **Pesticide Storage:** Store in a closed, properly labeled container in a cool place. If static generating conditions exist, provide necessary grounding and bonding. Keep containers closed when not in use. **Pesticide Disposal:** Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinseate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance. **Nonrefillable container.** Do not reuse or refill this container. Offer for recycling, if available. Clean container promptly after emptying.

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent into sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**GENERAL DESCRIPTION:** Pettit Hydrocoat ECO Ablative Antifouling Paint is an extremely effective, multi-season ablative antifouling protective coating resistant to slime, algae, barnacles and other marine, and freshwater fouling organisms. This product's state-of-the-art organic biocide technology is coupled with an unique ablative vehicle is designed to polish away at a controlled rate, which minimizes coating build-up and keeps underwater surfaces smooth and clean. This product is for use in fresh, salt or brackish water on hulls and underwater parts below the waterline. This paint is intended for use on recreational and commercial vessels of any size.

**DIRECTIONS FOR USE**  
It is a violation of Federal law to use this product in a manner inconsistent with its labeling. **PREPARATION OF SURFACE:** The surface to be painted should be clean, dry and free of any contamination or foreign matter. Always prepare the surface to be painted by sanding and solvent cleaning before any primers or primers are applied. When sanding old antifouling paint use a dust mask to prevent the inhalation of sanding dust. Old, soft bottom paints must be completely removed before applying.

**COVERAGE, APPLICATION AND TEMPERATURE:** This product can be applied by brush or short nap roller. All painting should be done between 9:00 a.m. and 4:00 p.m. in order to avoid the possibility of dew or condensation spilling the application. The temperature range of application should be between 50 and 90°F. At least two coats, should be applied for best performance, particularly in high wear areas such as the waterline. This product will cover approximately 375 square feet per gallon when applied at 1.5 dry mils film thickness.

**PREPARATION OF PAINT:** It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment, then remix the two parts together thoroughly.

**THINNING:** Thinning this product is not normally required. If thinning is necessary, use clean water only. Do not thin more than 10% (12 ounces per gallon) or inadequate paint film thickness will occur and premature erosion of the finish will be likely. Use clean water for cleaning up equipment.

**DRY TIMES:**

90°F	To recoat
70°F	1-1/2 hours
50°F	3 hours
	To launch
	12 hours
	16 hours
	48 hours

The above dry times are minimums. This product may be recoated and launched after the minimum times shown. There is no maximum time before launching.

**SYSTEMS**

mix paint thoroughly to ensure toxicants are evenly dispersed throughout the can. All surfaces must be clean, dry and properly prepared prior to painting. **PREVIOUSLY PAINTED SURFACES:** If the previous coating is in good condition, thoroughly sand with 80-grit sandpaper then solvent clean with Pettit 120 Brushing Thinner to remove residue. Apply two finish coats of this product. If the previous coating is soft or in poor condition, remove to the bare surface by sanding or using a paint and varnish remover. Proceed with appropriate bare system as described below.

**BARE FIBERGLASS:** All bare fiberglass, regardless of age, should be thoroughly cleaned with 92 Bio-Blue Pre-Paint Cleaner following the instruction on the Bio-Blue can. Sand thoroughly with 80-grit sandpaper to a dull, frosty finish and wash the sanded surface with fresh water to remove sanding residue. Then apply two coats of this product following application instructions. Careful observation of the above instructions will help ensure long-term adhesion of this and subsequent years' antifouling paint. To eliminate the sanding operation, scrub the surface using 92 Bio-Blue Pre-Paint Cleaner and a coarse Scotch-Brite® pad. Clean-up all residue with fresh water and allow the hull to dry thoroughly. Then apply one coat of Pettit 6098 Skip Sand Primer using a 3/16-inch or less nap roller or brush. Read and follow carefully the application and topcoating instructions on the Skip Sand Primer label. Apply at least two coats of this antifouling paint.

**BARE ALUMINUM:** Sandblast to clean, bright metal and remove blasting residue with clean, dry compressed air or a clean brush. Immediately apply two coats of Pettit 4400/4401 Alumina-Protect Epoxy Primer followed by two finish coats of this product. Read and follow carefully the instructions on the 4400/4401 Alumina-Protect Epoxy Primer label. If the surface to be painted is smooth aluminum, apply one coat of 6455/044 Metal Primer and allow to dry for 2 hours, then apply two finish coats of this product. Read and follow carefully the instructions for application and topcoating on the 6455/044 Primer label. **ALL OTHER SUBSTRATES:** Please go to [www.pettitboat.com](http://www.pettitboat.com) and consult the product data sheet. **VOC:** (as supplied) 150 grams/liter maximum.

**MEDICAL EMERGENCIES: 1-800-548-0489**  
**PRODUCT INFORMATION: 1-800-221-4466**

4/5

**Container Disposal:** Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

**NOTICE! THIS PRODUCT CONTAINS CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.**

ACCEPTED  
with COMMENTS  
in EPA Letter Dated:  
**AUG 27 2012**

Under the Federal Insecticide,  
Fungicide, and Rodenticide Act as  
amended, for the pesticide,  
registered under EPA Reg. No. **60061-137**

5/5