

OML 0345
Tank Label

TANK TRUCK AND TANK CAR SHIPPING LABEL

IMPORTANT: FOR TANK TRUCK: ATTACH TO SHIPPING PAPERS AND GIVE TO USER AT TIME OF DELIVERY.
FOR TANK CARS: ATTACH TO OUTSIDE DOME COVER.


RESTRICTED USE PESTICIDE

For sale to and use only by certified applicators or by persons under their supervision and only for those uses covered by the certified applicators' certification.

60/40 CREOSOTE - COAL TAR SOLUTION (PRESSURE APPLICATIONS)

INGREDIENTS:

| | |
|-------------------------|--------|
| Active Ingredients: | |
| Creosote-Coal Tar | 95% |
| Inert Ingredients (Max) | |
| Water-Free Carbon | 5% |
| Total | 100.0% |

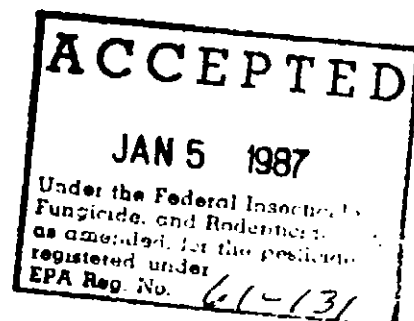

KEEP OUT OF REACH OF CHILDREN

DANGER

FIRST AID: If swallowed, call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.

If inhaled, remove to fresh air, if not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

In case of eye contact, flush immediately with plenty of water for 15 minutes and get medical attention.

For skin contact, wash thoroughly with soap and water. Get medical attention. (See side panel for additional precautionary statements.)

Koppers Company, Inc., Pittsburgh, PA 15219

EPA Reg. No. 61-131

EPA Establishment No. (To be stamped on at each plant.)

Net Contents _____

PRECAUTIONARY STATEMENT: Hazards to humans (and domestic animals).

DANGER: MAY BE FATAL IF SWALLOWED, INHALED OR ABSORBED THROUGH THE SKIN. CAUSES SKIN AND EYE IRRITATION. MAY CAUSE SEVERE BURNS. Do not get in eyes, on skin or on clothing. Do not breathe vapors or spray mist. Use with adequate ventilation. Do not take internally. Wash thoroughly after skin contact, before eating, drinking, use of tobacco products, or using restrooms. Wear goggles or face shield when handling.

293

OML 0345
Tank Label

Individuals must wear gloves impervious to the wood treatment formulations where dermal contact with creosote is expected (e.g., handling freshly treated wood and manually opening cylinder doors).

Individuals who manually open cylinder doors must wear gloves and a respirator.

Individuals who enter pressure treatment cylinders and other related equipment that is contaminated with the wood treatment formulation (e.g., cylinders that are in operation or are not free of the treatment formulation) must wear protective clothing (including overalls, jacket, gloves and boots) impervious to the wood treatment formulation and a respirator.

Applicators must not eat, drink, or use tobacco products during those parts of the application process that may expose them to wood treatment formulation, (e.g., manually opening/closing cylinder doors, moving trams out of cylinders, mixing chemicals, and handling freshly-treated wood.)

Protective clothing must be changed when it shows signs of contamination. Applicators must leave protective clothing and workshoes or boots and equipment at the plant. Worn-out protective clothing and workshoes or boots must be left at the plant and disposed of in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

Wash thoroughly after skin contact, and before eating, drinking, use of tobacco products, or using restrooms.

NOTE TO USER: As used on this label, the term "respirators" means properly fitting, well-maintained, half-mask canister or cartridge respirators which are MSHA/NIOSH-approved for polynuclear aromatics and organic vapors. Examples of acceptable materials for protective clothing (e.g., gloves, overalls, jackets, and boots) required during application and handling of creosote are polyvinyl acetate (PVA), polyvinyl chloride (PVC), neoprene, and NBR (Buna-N).

ENVIRONMENTAL HAZARDS:
This product is toxic to fish and wild life. Do not apply directly to any body of water or wetlands. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL AND CHEMICAL HAZARDS
Do not use or store near heat or open flame. Close container after each use.

DIRECTIONS FOR USE
It is a violation of federal law to use this product in a manner inconsistent with its labeling. Contents for use only in pressure treatment of wood products in commercial applications, i.e., ties, poles, pilings, lumber and timbers. Do not use this product on wood intended for use in homes.

STORAGE AND DISPOSAL
Storage: Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations. Do not contaminate water, food or feed by storage or disposal.

3 of 3

OML 0345
Tank Label

PESTICIDE DISPOSAL:

Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

WARRANTY: We warrant this material to comply with our published specifications and to be of good merchantable quality and such as will regularly pass in the trade for goods within the description, and further warrant such goods to be fit for the normal purposes for which goods are used. We assume no responsibility that the goods concerned in this contract are fit for any particular purpose for which they are being bought outside of the general purposes of goods of the description.

Medical Emergencies: 1 800 553-5631 In Pennsylvania Call: 1 800 323-6571

OML 0345-R02