

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Ultra-Flo Systems Inc
9920 LaCienega Blvd Suite 726
Inglewood, CA 90301

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.

2. Make the labeling changes listed below before you release the product for shipment:

- a. Add the phrase "EPA Registration No. 61699-1."
- b. Just a reminder to include the EPA Registration on the Installation Instructions Sheet.


ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

DATE

subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.


John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Enclosure

BEST AVAILABLE COPY

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. See enclosed Instructions.

To be used in regions with hard water only.

For use on municipally treated tap water only or on water that has been determined safe to drink by local authorities.

Inhibits bacteria growth within unit.

Service Flow Rate: 0.5 gpm

Daily Treatment Rate: 17 gallons

ACCEPTED with COMMENTS in EPA Letter Dated:

JUL 18 1990

Under the provisions of the Federal Insecticide, Fungicide, and Rodenticide Act, this product is registered under the name of 61699-1.

EPA Registration No.

Net Contents:
One Bacteriostatic Filter

Ultra-Flow
WATER FILTRATION SYSTEM
MODEL NO. UF-00

OPERATING SPECIFICATIONS

Service Flow Rate: 0.5 gpm

Maximum water supply pressure: 125 psi (8.6 bar) maximum

Maximum water temperature: 120°F (49°C)

Filter capacity: 600 gallons (2271 liters) (based on typical tap water containing 100 colony forming units per gallon of water per day)

Replace filter when the water tastes, looks, or smells different from the water before the filter was installed.

Do not use where the water contains biological contaminants with water of unknown quality with a high pH or different biological content.

Install in vertical position only.

ACTIVE INGREDIENT: Metallic Silver 1.05%
INERT INGREDIENTS 98.95%

KEEP OUT OF REACH OF CHILDREN
CAUTION

Date Installed: _____
Change Filter: _____
REPLACE NO LATER THAN ONE YEAR FROM DATE INSTALLED


DISPOSAL: Wrap spent cartridge in paper and discard

1. Shut cold water line off and cut copper tubing where the UF-60 is to be installed. Install filter in the vertical position only.
2. On incoming water line, place hex nut and ferrule over the copper tubing as shown in schematic below.
3. Insert copper tube with nut and ferrule into head of fitting on inlet side of the filter. Tighten by hand until no further movement is possible.
4. Then with wrench, tighten hex nut while holding filter insert fitting with the other wrench. (do not over tighten)
5. Place pail under the filter, turn water on slowly to flush the carbon fines from filter until water runs clear. Turn water off.
6. Follow same connection procedure for the outlet side of filter. (Some bending of tubing may be required).
7. Turn water on slowly until full flow is reached.
8. Check for leaks. If any occur, additional tightening of fittings may be required.
9. Mark date of installation on the label; replace every 10-12 months or when flow rate becomes inconveniently slow.

The filter must be installed in the vertical position. Use the flow arrows on the label as your guide to flow direction. The inlet water flow must be in the same direction as the arrows.

INSTALLATION SCHEMATIC

BEST AVAILABLE COPY

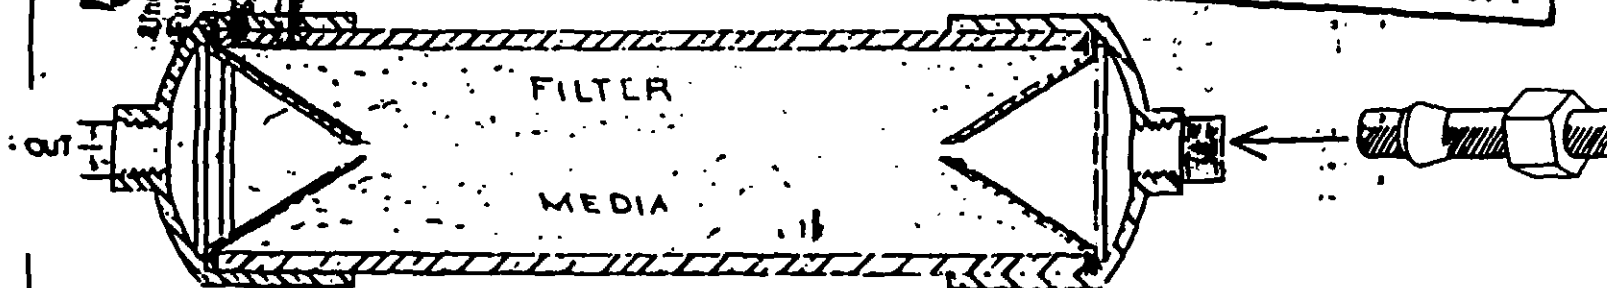

ACCEPTED
with COMMENTS
by EPA. Letter Dated:
6/6/99

JUL 18 1990

Under the provisions of the
Clean Air Act, this document
is being made available to the
public. For more information,
contact the EPA at the address
listed on the label.