

# Foster 40-30

## Fungicidal Protective Coating

Active Ingredients:	
Barium Metaborate	6.39%
3-Iodo-2-propynyl butylcarbamate	0.12%
Other Ingredients:	83.49%
	100.00%

This contains 0.70 pounds of Barium Metaborate and 0.013 pounds of 3-Iodo-2-propynyl butylcarbamate per gallon.

### KEEP OUT OF REACH OF CHILDREN CAUTION

#### FIRST AID

**IF IN EYES:** Hold eyes open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a Poison Control Center or doctor for treatment advice.  
**IF ON SKIN:** Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a Poison Control Center or doctor for treatment advice.  
**IF SWALLOWED:** Call a Poison Control Center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told by a Poison Control Center or doctor.

In case of emergency call 1-888-853-1758. Have the product container or label with you when calling a Poison Control Center or doctor.

### Specialty Construction Brands, Inc.

315 South Hicks Rd.  
Palatine, IL 60067-8972

EPA Registration No. 63836-2  
EPA Est. No. 63836-TX-001  
Net Contents: 55 lbs. (5 gallons)

U.S. Patent No. 5,314,719

**PRECAUTIONARY STATEMENTS**  
**HAZARDOUS TO HUMANS AND DOMESTIC ANIMALS**  
**CAUTION:** Harmful if swallowed or absorbed through the skin. Causes moderate eye irritation. Do not get on skin, clothing, or in eyes. Prolong or frequently repeated skin contact may cause allergic reaction in some individuals. Remove contaminated clothing and wash clothing before reuse.

The information and data contained herein are correct to the best of our knowledge and tests. We recommend that adequate tests be made by the purchaser to determine if a product is suitable for the intended purpose and use.  
 Important: Foster Products Corporation warrants that each of its products will be manufactured in accordance with Foster Products' specifications in effect on the date of manufacture. If a product fails to meet the limited warranty, the purchaser's sole and exclusive remedy is replacement of the product or, at Foster's option, refund of the purchase price. **FOSTER PRODUCTS' ACCEPTANCE OF ANY ORDERS FOR THIS PRODUCT IS EXPRESSLY CONDITIONAL UPON THE PURCHASER'S ASSENT TO THE TERMS ON THE APPLICABLE PRODUCT DATA SHEET AND INVOICE.**

Foster 40-30 contains fungicides that will effectively prevent the growth and spread of odor-causing bacteria and molds on its surface.

#### DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling. Do not apply this product in a way that will contact workers or other persons.  
**Surface Preparation:** Apply only to clean, dry surfaces free of all dirt, grease, mold or other contaminants. Follow the surface preparation directions on the product data sheet for the type of surface to be coated.  
**DO NOT USE:** Apply Foster 40-30 by brush or airless spray at a rate of approximately .75 to 1.5 gallons per 100 square feet. Always ensure adequate ventilation. Brushing will require two heavy coats applied at 90° to each other. Under normal circumstances a spray application can be completed in one coat, but for extremely porous or irregular surfaces, a second coat may be required. Ensure that the finished surface is smooth and homogeneous. For airless spray application, use an electric 10:1 minimum pump with a .021-.025 fluid tip and 700-900 psi atomizing pressure at the gun. Clean brushes and equipment with warm water before product dries. Refer to the product data sheet for more complete information on product use sites and application procedures.

#### STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage and disposal.  
**PESTICIDE STORAGE:** Protect from freezing - product stability may be affected. Do not store or apply at temperatures over 100°F (38°C) or below 40°F (4.4°C). Keep container closed when not in use.  
**PESTICIDE DISPOSAL:** State or local hazardous waste regulations may apply if they are different from the federal regulations. Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility. For additional waste disposal information call the H.B. Fuller Company Environmental Services at (800) 338-2975.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

27523, Rev. B

**ACCEPTED**  
 APR 19 2004  
 Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 63836-2

63836-2

04/19/2004

1/3

### PROPERTIES

**COLOR:** Black

**APPLICATION CONSISTENCY:**  
Brush, spray or rollercoat

**AVERAGE WEIGHT / U.S. GALLON (ASTM D 1475):**  
11.0 lbs. (1.32 kg/l)

**AVERAGE NON-VOLATILE (ASTM D 2369):**  
35% by volume (51% by weight)

**COVERAGE RANGE:**  
(Subject to the nature of material being coated.) Wet coverages shown below are minimum gallonages required:  
Galvanized Metal: .75 gal./100 sq. ft. (.31 l/m<sup>2</sup>)  
New Duct Liner: 1.0 gal./100 sq. ft. (.41 l/m<sup>2</sup>)  
Old Eroded Duct Liner: 1.5 gal./100 sq. ft. (.61 l/m<sup>2</sup>)  
Unsealed, rough, or low density surfaces may require higher gallonage to attain required surface sealing.

**DRYING TIME (ASTM D 1640):**  
Set to Touch: 6 hours  
Dry Through: 24 hours

**SERVICE TEMPERATURE LIMITS (FSTM 70):**  
(Temperature at coated surface)  
-50°F to 180°F (-46°C to 82°C)


**WET FLAMMABILITY (ASTM D 93):**  
No flash to boiling, 212°F (100°C)

**SURFACE BURNING CHARACTERISTICS (ASTM E 84):**  
Flame Spread: 10  
Smoke Developed: 5  
Tested at coverage rate of 150 sq.ft./gal. (3.68 m<sup>2</sup>/l).  
Applied to 1" (25mm) faced duct liner. The flame spread may vary at different product thicknesses and/or when applied over other surfaces.

Meets NFPA 90A and 90B 25/50 requirements.

™ Trademark of Specialty Construction Brands, Inc.

Visit us on the web at [www.fosterproducts.com](http://www.fosterproducts.com)

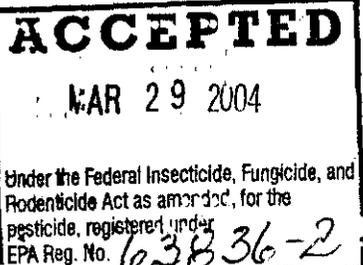

315 South Hicks Road

### FOSTER FUNGICIDAL PROTECTIVE COATING

FOSTER 40-30 is a low odor, quick setting water-based surfacing material designed for field or shop application to faced or unfaced fiberglass duct liner, fiberglass duct board insulation or galvanized surfaces. It is formulated to effectively prevent the spread of molds and odor-causing bacteria on its surface with long term activity. Its low viscosity allows for application with virtually any type of spray equipment now available to the market.

FOSTER 40-30 guards against the regrowth and spread of odor causing bacteria and molds on the surface of the coated HVAC system or its treated components only. As a result, the building occupants may enjoy a work space free of the odor problems often associated with contaminated HVAC duct systems.

FOSTER 40-30 dries to form an effective air erosion preventive surfacing material sealing and reinforcing the surface of new or aged duct liner insulation materials.

FOSTER 40-30 is non-flammable when wet and extremely fire-resistive when dry. When tested on both faced and unfaced fiberglass duct liner insulation, Foster 40-30 produced flame and smoke ratings below the 25/50 NFPA 90A and 90B requirements. The dry film stays flexible and moisture resistant. It will not cause flash rusting on metal surfaces.

FOSTER 40-30 contains no asbestos, lead, mercury, or mercury compounds.

**LIMITATIONS**  
Store between 40°F (4°C) and 100°F (38°C). Protect from freezing. DO NOT DILUTE.

Apply between 50°F (10°C) and 100°F (38°C) with less than 70% RH air conditions maintained until dry.

Waterbased products may corrode carbon steel spray equipment. Corrosion resistant pumps and fittings are suggested.

For interior use only.

FOR PROFESSIONAL USE ONLY.

U.S. Patent No. 5,314,719  
EPA Registration No. 63836-2  
EPA Est. No. 63836-TX-001

8044 (4/02) PPI

Specialty Construction Brands, Inc.

Palatine, IL 60067-6972

800-231-9541

fax 800-942-6856

# APPLICATION GUIDE FOR FOSTER FUNGICIDAL PROTECTIVE COATING 40-30

## MATERIAL PREPARATION

DO NOT THIN. Apply only to clean, dry surfaces. Keep container closed when not in use.

## SURFACE PREPARATION

Lined air ducts should be thoroughly cleaned to remove all mold, dust and loose particles, being careful not to tear or loosen the liner. Galvanized surfaces need to be vacuumed or washed clean of all accumulated mold, dust and loose particles. Following complete cleaning procedures, sanitize the entire air duct surfaces with an approved sanitizer following manufacturer's directions. Ensure that all interior surfaces are thoroughly dry before applying 40-30. All rusted metal surfaces must be primed with Foster 40-26 before application of 40-30. 40-30 may be applied directly onto cleaned unrusted galvanized surfaces.

## APPLICATION

Always ensure adequate ventilation by using negative air pressure in the HVAC system during application. Apply Foster 40-30 to all surfaces by brush or airless spray at the required rate (see front page). Brushing will require two coats applied at 90° to each other. Under normal circumstances a spray application can be completed in one coat, but for extremely porous or irregular surfaces, a second coat may be required. 40-30 has been designed with an average viscosity range of between 4,000 and 6,000 cps enabling application by virtually any type of airless spray equipment. Ensure that the finished surface is smooth and well sealed.

**TE:** Continue to circulate fresh air throughout the system during the application and for as long after the application as is possible. Circulated air should be exhausted outside the building. If air must be exhausted inside the building, filtration through a charcoal medium is suggested. This circulation and filtration helps to reduce the dry time of the coating and reduce latex type odors that could possibly migrate from the application area. Be sure exhausted air is odorless before venting into occupied spaces.

## MAINTENANCE

Normal cleaning procedure must be maintained in HVAC systems to remove accumulated airborne particles.

## CLEAN-UP

Use fresh water to clean brushes before product dries. While the product is still wet, flush the equipment with a solution comprised of 1/2 cup sudsy ammonia, 1/2 cup pine oil cleanser, and 4 gallons of cool water. Flush until material exiting pump shows no evidence of 40-30. Dry product may be removed with chlorinated solvents (non-flammable) or xylol (flammable).

## HAZARD STATEMENT:

**CAUTION:** Harmful if swallowed or absorbed through skin. Causes moderate eye irritation. Avoid contact with skin or eyes or clothing. Wash thoroughly with soap and water after handling. Wear safety glasses to reduce the potential for eye contact; chemical safety goggles are appropriate if product is spray applied. Have eye washes available where eye contact can occur. Prolonged skin contact may cause irritation. Applicators and other handlers must wear long-sleeve shirt and long pants, chemical-resistant gloves, such as Barrier Laminate, Viton, or Nitrile or Neoprene rubber, shoes plus socks. Users should wash hands before eating, drinking, using gum, using tobacco, or using the toilet. Users should remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Users should remove personal protection equipment immediately after handling this product. Wash the outside of gloves before removing. As soon as possible wash thoroughly. Acute overexposure to vapors may cause dizziness, headache, nausea and unconsciousness. Since emptied containers retain product residue, follow label warnings even after container is empty.



**CUSTOMER SERVICE—800-231-9541 OR 800-338-2975**

**IMPORTANT:** Specialty Construction Brands, Inc. warrants that each of its products will be manufactured in accordance with the specifications in effect on the date of manufacture. WE MAKE NO OTHER WARRANTIES AND EXPRESSLY DISCLAIM ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If a product fails to meet this limited warranty, purchaser's sole and exclusive remedy is replacement of the product or, at our option, refund of the purchase price. OUR ACCEPTANCE OF ANY ORDERS FOR THE PRODUCT IS EXPRESSLY CONDITIONAL UPON PURCHASER'S ASSENT TO THE TERMS ON THE APPLICABLE INVOICE.

**ADEQUATE TESTS:** The information contained herein we believe is correct to the best of our knowledge and tests. The recommendations and suggestions herein are made without guarantee or representation as to results. We recommend that adequate tests be performed by you to determine if this product meets all of your requirements. The warranted shelf life of our products is six months from date of shipment to the original purchaser.

For industrial use only. Keep out of reach of children.

Consult Material Safety Data Sheet and container label for further information.