



U.S. ENVIRONMENTAL PROTECTION AGENCY
 Office of Pesticide Programs
 Antimicrobials Division (7510P)
 1200 Pennsylvania Avenue NW
 Washington, D.C. 20460

EPA Reg. Number: 64684-5	Date of Issuance: FEB 1 2013
------------------------------------	--

Term of Issuance: Conditional
Expires on 3/30/2015

Name of Pesticide Product:
E Paint SN-1

NOTICE OF PESTICIDE:
 Registration
 Reregistration

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):
 E Paint, Inc.
 25 Research Road
 E. Falmouth, MA 02536


Note: Changes in labeling, differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(a) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA Section 3(c)(5) when the Agency required all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA Section 4
2. Make the following labeling changes:
 - a. Revise the EPA Registration Number to read, "EPA Reg. No. 64684-5."

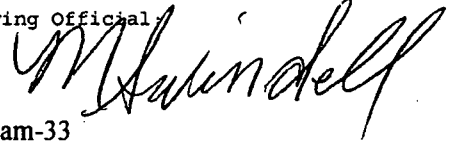Signature of Approving Official

 Marshall Swindell
 Product Manager Team-33
 Regulatory Management Branch I
 Antimicrobials Division (7510P)

Date:
FEB 1 2013

b. The following submitted data must be found acceptable:

- 1. 73-1 Whole sediment acute freshwater invertebrate
- 2. 73-2 Whole sediment acute marine invertebrate
- 3. 850.5400 Marine diatom *Skeletonema costatum*
- 4. 850.4225 Seedling emergency in rice
- 5. 850.5400 Vegetative vigor dose response in rice

c. Submit by 1/1/05 data to satisfy the following two requirements:

- 1. 875.1100 Dermal exposure – outdoor
- 2. 875.1300 Inhalation exposure-outdoor

d. Submit the following “reserved” studies within 12 months of the date of the Agency’s written request for these data. The need for these reserved data will be based upon the results of one or more of the above studies as determined by the Agency:


- 1. 72-5 Fish Life Cycle
- 2. 72-7 Simulated or actual field testing for aquatic organisms
- 3. 71-4 Avian Reproductions
- 4. 73-3 Acute Pore Water Studies (fish and invertebrates)
- 5. 74-1 Whole Sediment Chronic Study (invertebrates)
- 6. 123-1 Seedling Emergence – Dose Response Test, Special Study: Monitoring or Representative US Water
- 7. 162-1 Aerobic Soil Metabolism
- 8. 162-2 Anaerobic Soil Metabolism
- 9. 164-2 Aquatic Field Study
- 10. 165-5 Accumulation Study
- 11. Monitoring of Representative US Water (No Guideline No.)

This conditional registration will expire automatically on 9/20/2014. If you fail to satisfy the conditions imposed on the registration, EPA may issue a Notice of Registration to cancel under Section 6(e) of FIFRA.

3. Submit two copies of the revised final printed labeling before you release the product for shipment. Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the accepted label is enclosed for your records. Submit one (1) copy of your final printed labeling prior to release of this product for shipment. If you have any questions concerning this letter, please contact Demson Fuller at 703-308-8062.

Sincerely,

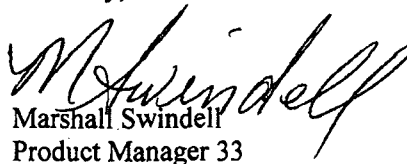

Marshall Swindell
Product Manager 33

Regulatory Management Branch 1
Antimicrobial Division (7510P)

Enclosure: (Stamped Label)

3/14

E Paint SN-1

Antifouling Paint for Boat Bottoms With Sea-nine 211®

Manufactured by:
E Paint Company
25 Research Road
E. Falmouth, MA 02536
U.S. Patents #5,916,947 #6,063,849

Active Ingredient	
4, 5-Dichloro-2-n-octyl-3(2H)- isothiazolone.....	2.91%
Inert Ingredients.....	97.09%
	100.0%


Use Restrictions: For use in Commercial or Navy shipyards only. Not for use by private applicators or marinas. Not for use on stationary structures.

Contains Petroleum Distillates
EPA Reg. No. 64684-5
EPA Establishment No. 87830-MA-001

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of E Paint Company including surface preparation, proper application, and environmental conditions. Therefore, E Paint Company cannot guarantee this product's suitability for your particular purpose or application. IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND OF MERCHANTABILITY ARE EXCLUDED. E PAINT COMPANY SHALL NOT, UNDER ANY CIRCUMSTANCES, BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to refund of the purchase price, or replacement of the product at E Paint Company's option.

DANGER:
KEEP OUT OF REACH OF CHILDREN See back panel for additional precautionary statements.

NET CONTENTS:
ONE U.S. GALLON (3.8 Liters)
VOC <400G/LITER

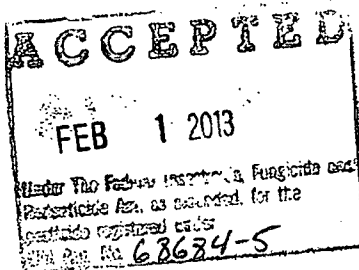

4/14

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner that is inconsistent with its labeling.

This product may be used in fresh or salt water, and is intended for use on the bottom of boats and ships.

Directions for mixing: Mix contents of container. Stir until thoroughly mixed before using. Use immediately.

Preparation of Surface: The surface to be painted should be dry, clean and oil free. It should be properly prepared by solvent cleaning and/or sanding before any primers or paints are applied. Follow the recommended systems below. Bare metal surfaces should be primed prior to application. When sanding old antifouling paint, use a face mask to prevent inhalation of sanding dust.

Application and Temperature: Apply by brush, roller, or spray. The work should be done under good drying conditions in the temperature range of 50 to 90°F. Three coats are recommended for best antifouling protection.

Thinner: Thinning not recommended

Drying Times: Let the first coat dry for four hours before applying second coat. After application of the second and third coats allow at least ten hours drying time before launching. Under adverse drying conditions let the boat dry overnight to be sure that all of the solvent has evaporated from the paint film.

FIRST AID

If Inhaled

Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for further treatment advice.

If on Skin

Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for further treatment advice.

If in Eyes

Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for further treatment advice.

If Swallowed


Call a poison control center or doctor immediately for treatment advice. Do not induce vomiting unless told to do so by the poison control center or doctor. Do not give any liquid to the person. Do not give anything by mouth to an unconscious person.

IN CASE OF EMERGENCY CALL: 800-424-9300

Note to Physician:

Probable mucosal damage may contraindicate the use of gastric lavage.

**PRECAUTIONARY STATEMENTS HAZARD
TO HUMANS AND DOMESTIC ANIMALS
KEEP OUT OF REACH OF CHILDREN**

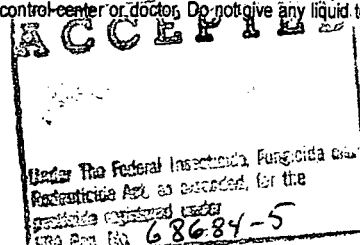

DANGER, CORROSIVE: Causes irreversible eye damage and may cause severe skin irritation. Product may be fatal if swallowed or absorbed through the skin. Harmful if swallowed, inhaled or absorbed through the skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes, on skin or on clothing. Avoid contact with skin. This product is a dermal sensitizer. Where skin and eye contact may occur, wear eye protection such as goggles or face shield, rubber gloves, full body coverings such as coveralls and hat, and other protective clothing such as long sleeved shirt, long pants, and head covering to prevent skin contact. Avoid breathing vapor, mist, dust or chips from painting and sanding. Use adequate ventilation While spraying paint or sanding boat surface, wear a supplied-air or powered air purifying respirator (PAPR) approved by NIOSH for use with paints and coatings.

Wear a Tyvek hooded coverall or the exact equivalent, coverall beneath the Tyvek hooded coverall, impervious gloves and impervious footwear that protects the lower leg. Remove contaminated clothing and discard after each use, do not reuse. Wash thoroughly with soap and water after handling and before eating or smoking.

STORAGE & DISPOSAL

Do not store near heat source or open flames. Containers are hazardous when empty. Emptied containers retain product residue (vapors and/or liquid). Residual vapors may explode or ignite; do not cut, drill, grind, or weld on or near this container. Do not contaminate water, food or feed by storage, disposal, or cleaning of equipment.

Pesticide Disposal:

Pesticide wastes are hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Container Disposal:

For metal containers, triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and aquatic invertebrates. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Offices of the EPA. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Wear protective clothing and supplied air respirator in accordance with the Precautionary Statements above when handling, painting or removing this paint.

This Product is Intended for use only on Commercial or Government Boats or Vessels