

64684-6

12/08/2004

1/2

DEC 08 2004

Kimberly Fontaine-Goodwin
E Paint Company
25 Research Road
E. Falmouth, MA 02536

**Subject: Zinc Pyrithione RED Required Label Amendments, Both Dated 11/22/04
E Paint-ZO; EPA Reg. No. 64684-4
EP 2000; EPA Reg. No. 64684-6 ✓**

The two amendments referred to above, submitted in connection with re-registration under the Federal Insecticide, Fungicide, and Rodenticide Act), as amended, which provide revised labels with interim label changes as required by the Zinc Pyrithione Red decision memo dated 9/30/04, and further specified in the EPA letter dated 11/4/04 to each registrant with zinc pyrithione products, are acceptable with the following change.


On the E Paint-ZO label, delete "supplied air" from the last sentence in the "Environmental Hazards" section. The attached stamped label has these words blacked out.

The products listed above must have the accepted label changes on them the earlier of the next product production cycle, or the next boat painting season in 2005. Copies of labels stamped "Accepted With Comments" are enclosed for your records.

As per the registration notices for these product dated 3/17/03, these registration expires 6/30/05.

If you have any questions about the comments in this letter, please feel free to contact Tony Kish at 703-308-9443, or myself at 703-308-6341.

Sincerely,

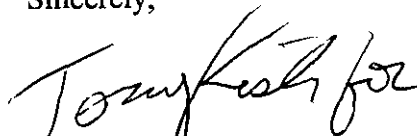

Marshall Swindell,
Product Manager Team 33,
Regulatory Management Branch I
Antimicrobials Division (7510C)

ACCEPTED
with COMMENTS
in EPA Letter Dated:
DEC 08 2004

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

64684-b

EP2000

epaint[®]

Go Fast, Stay Clean

High Performance, Photoactive, Waterborne

Anti-Mold Paint for Boat Bottoms

DANGER: KEEP OUT OF REACH OF CHILDREN

SEE BACK PANEL FOR ADDITIONAL
AND CAUTIONARY STATEMENTS

Active Ingredients	
Zinc Pyrithione	4.7%
Inert Ingredients	95.3%
	100.0%

NET CONTENTS:
ONE U.S. QUART (946 LITERS)

EPA Registration No. 64684-b
EPA Establishment No. 64684-MA-001

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner that is inconsistent with its labeling. May be used in fresh or salt water, use on the bottom of vessels is recommended. This paint is intended for use on commercial and recreational vessels.

Preparation: Remove all existing antifouling paint before applying EP2000. Grind, sandblast, or hydroblast to remove existing antifouling paint.
Primer: All surfaces to be coated with EP2000 should be primed with EP-Prime 2000 to provide a fresh, clean substrate for EP2000 to adhere. Follow manufacturer's instructions regarding surface preparation and cure times. After EP-Prime 2000 has fully cured, sand surface with 80-100 grit aluminum oxide sandpaper. Wipe surface with a damp cloth to remove stubborn contaminants and sanding debris. Failure to remove dust and sanding debris will result in adhesion failure.
Application: EP2000 may be applied by spraying, rolling or by using a foam brush. Rolling may cause surface imperfections such as pinholing. Only apply EP2000 to clean, dry, well prepared surfaces. **IMPORTANT:** Be sure to follow dry-to-recoat and launch instructions. Apply only at temperatures between 60-80°F.

For application by residential (non-commercial) users: Do not apply by airless sprayer. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces.

Number of coats: Apply a minimum of two coats of EP2000. Apply an additional coat along the waterline and other high wear areas.
Thinning & Mixing: For spraying thin no more than 5% with water. Thinning is not recommended for brushing or rolling. To mix, stir the product thoroughly until a homogeneous blend results. Clean up with water.
Coverage: 275Sq.Ft/Gal at 2 mil dr Film thickness per coat; 4-6 wet mils to obtain 2-3 dr Dry-To-Recoat: 8 Hours @70°F (21°C) 50%RH Dry-To-Launch: 24 Hours @70°F (21°C) 50%RH

First Aid — Class 1

- If inhaled**
 - Move person to fresh air.
 - If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible.
 - Call a poison control center or doctor for further treatment advice.
- If on skin**
 - Take off contaminated clothing.
 - Rinse skin immediately with plenty of water for 15-20 minutes.
 - Call a poison control center or doctor for further treatment advice.
- If in eyes**
 - Hold eyes open and rinse slowly and gently with water for 15-20 minutes.
 - Remove contact lenses, if present, after first 5 minutes, then continue rinsing eyes.
 - Call a poison control center or doctor for further treatment advice.
- If swallowed**
 - Call a poison control center or doctor immediately for treatment advice.
 - Do not induce vomiting unless told to do so by the poison control center or doctor.
 - Do not give any liquid to the person.
 - Do not give anything by mouth to an unconscious person.

IN CASE OF EMERGENCY CALL: 800-424-6300

Manufactured by:
E Paint Company
25 Research Road
E. Northampton, MA 01060

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of E Paint Company, including surface preparation, proper application, and environmental conditions. Therefore, E Paint Company cannot guarantee the product's ability to perform for any purpose or in any environment. **WARRANTY:** SEE THE BACK PANEL FOR A FULL, DETAILED STATEMENT OF OUR WARRANTY AND OTHER INFORMATION. **SALES:** E Paint Company products are sold through authorized distributors. For more information, contact your local distributor or call 1-800-424-6300.

Note to P...

Corrosive to the skin. May cause allergic reactions. Avoid breathing vapors before wearing resistant clothing. Resistant to resistant clothing and gloves. For application by residential (non-commercial) users: Do not apply by airless sprayer. Do not apply more than one coat of this product within 24 hours. Apply only in outdoor, non-enclosed spaces. Number of coats: Apply a minimum of two coats of EP2000. Apply an additional coat along the waterline and other high wear areas. Thinning & Mixing: For spraying thin no more than 5% with water. Thinning is not recommended for brushing or rolling. To mix, stir the product thoroughly until a homogeneous blend results. Clean up with water. Coverage: 275Sq.Ft/Gal at 2 mil dr Film thickness per coat; 4-6 wet mils to obtain 2-3 dr Dry-To-Recoat: 8 Hours @70°F (21°C) 50%RH Dry-To-Launch: 24 Hours @70°F (21°C) 50%RH

Storage: empty. E may cause irritation. Pesticide. Side or use according to Agency's guidance. Contains. Call if you Never place

This pest...
sted dur...
len... V...
States...